




PROBLEM SUMMARY

Sample Rating Trend

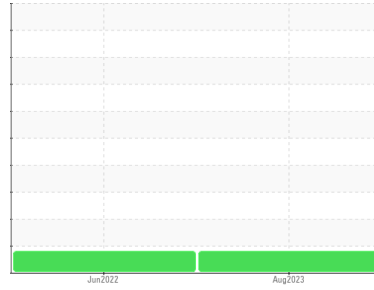

ISO




Machine Id
PRESS 2 MAIN

Component
Hydraulic System

Fluid
AW HYDRAULIC OIL ISO 46 (11000 LTR)

COMPONENT CONDITION SUMMARY

▲ Particle Trend

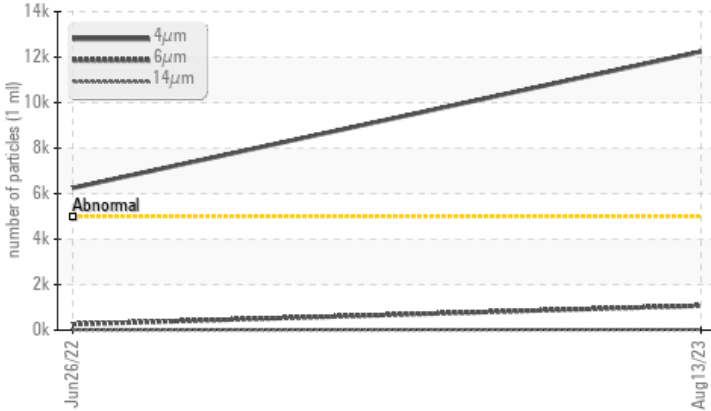

RECOMMENDATION

We recommend you service the filters on this component. We recommend an early resample to monitor this condition. Please specify the brand, type, and viscosity of the oil on your next sample. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using Advanced Oil Monitoring (AOM) kits for this system. The AOM test package includes advanced level testing to determine the suitability of turbine and large industrial compressor oils for continued use.

PROBLEMATIC TEST RESULTS

Sample Status		ABNORMAL	ATTENTION	---
Particles >4µm	ASTM D7647 >5000	▲ 12242	▲ 6248	---
Oil Cleanliness	ISO 4406 (c) >19/17/14	▲ 21/17/12	▲ 20/15/10	---

Customer Id: INDMIS
 Sample No.: WC
 Lab Number: 02575726
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Wes Davis +1 905-569-8600 x223
wesd@wearcheck.ca

To change component or sample information:
 Gloria Gonzalez +1 (289)291-4643 x4643
gloria.gonzalez@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Filter	---	---	?	We recommend you service the filters on this component.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Contact Required	---	---	?	Please contact your representative for information regarding the proper sampling kits for your service.
Alert	---	---	?	NOTE: We recommend using Advanced Oil Monitoring (AOM) kits for this system. The AOM test package includes advanced level testing to determine the suitability of turbine and large industrial compressor oils for continued use.
Information Required	---	---	?	Please specify the brand, type, and viscosity of the oil on your next sample.

HISTORICAL DIAGNOSIS

ISO



26 Jun 2022 Diag: Kevin Marson

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. We recommend you service the filters on this component. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample. All component wear rates are normal. There is a light amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

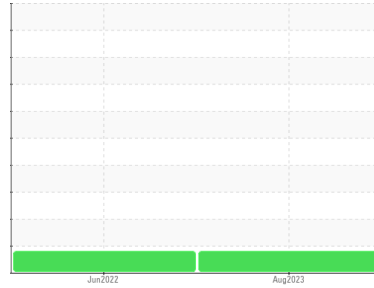

ISO



Machine Id
PRESS 2 MAIN

Component
Hydraulic System

Fluid
AW HYDRAULIC OIL ISO 46 (11000 LTR)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component. We recommend an early resample to monitor this condition. Please specify the brand, type, and viscosity of the oil on your next sample. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using Advanced Oil Monitoring (AOM) kits for this system. The AOM test package includes advanced level testing to determine the suitability of turbine and large industrial compressor oils for continued use.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service (unconfirmed). The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	WC	WC	---
Sample Date	Client Info	13 Aug 2023	26 Jun 2022	---
Machine Age	hrs Client Info	0	0	---
Oil Age	hrs Client Info	0	0	---
Oil Changed	Client Info	N/A	N/A	---
Sample Status		ABNORMAL	ATTENTION	---

WEAR METALS

method	limit/base	current	history1	history2
Iron ppm	ASTM D5185(m) >20	3	2	---
Chromium ppm	ASTM D5185(m) >20	0	0	---
Nickel ppm	ASTM D5185(m) >20	0	0	---
Titanium ppm	ASTM D5185(m)	0	0	---
Silver ppm	ASTM D5185(m)	0	0	---
Aluminum ppm	ASTM D5185(m) >20	<1	0	---
Lead ppm	ASTM D5185(m) >20	<1	1	---
Copper ppm	ASTM D5185(m) >20	14	15	---
Tin ppm	ASTM D5185(m) >20	0	0	---
Antimony ppm	ASTM D5185(m)	0	0	---
Vanadium ppm	ASTM D5185(m)	0	0	---
Beryllium ppm	ASTM D5185(m)	0	0	---
Cadmium ppm	ASTM D5185(m)	0	0	---

ADDITIVES

method	limit/base	current	history1	history2
Boron ppm	ASTM D5185(m) 5	<1	<1	---
Barium ppm	ASTM D5185(m) 5	0	0	---
Molybdenum ppm	ASTM D5185(m) 5	0	0	---
Manganese ppm	ASTM D5185(m)	0	0	---
Magnesium ppm	ASTM D5185(m) 25	1	1	---
Calcium ppm	ASTM D5185(m) 200	59	59	---
Phosphorus ppm	ASTM D5185(m) 300	368	324	---
Zinc ppm	ASTM D5185(m) 370	437	405	---
Sulfur ppm	ASTM D5185(m) 2500	769	762	---
Lithium ppm	ASTM D5185(m)	<1	<1	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon ppm	ASTM D5185(m) >15	<1	0	---
Sodium ppm	ASTM D5185(m)	<1	<1	---
Potassium ppm	ASTM D5185(m) >20	<1	0	---

FLUID CLEANLINESS





method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >5000	▲ 12242	▲ 6248	---
Particles >6µm	ASTM D7647 >1300	1074	260	---
Particles >14µm	ASTM D7647 >160	23	10	---
Particles >21µm	ASTM D7647 >40	6	2	---
Particles >38µm	ASTM D7647 >10	0	1	---
Particles >71µm	ASTM D7647 >3	0	0	---
Oil Cleanliness	ISO 4406 (c) >19/17/14	▲ 21/17/12	▲ 20/15/10	---

FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN) mg KOH/g	ASTM D974* 0.57	0.26	0.39	---




OIL ANALYSIS REPORT

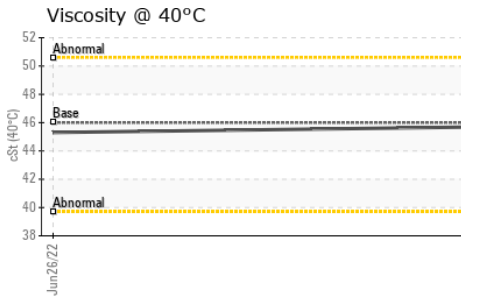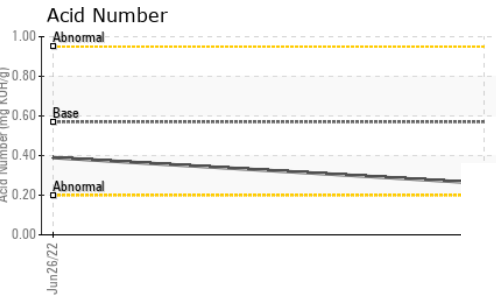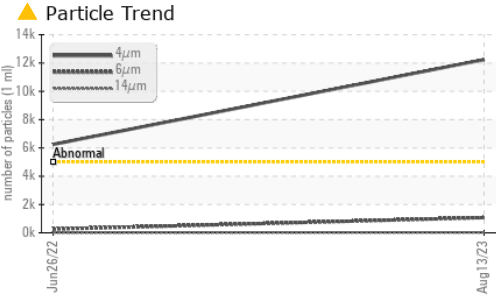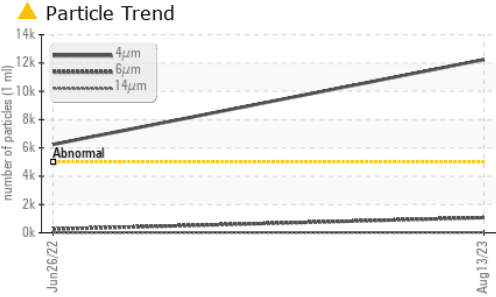






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	VLITE
Sand/Dirt	scalar	Visual*	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.05	NEG	---
Free Water	scalar	Visual*		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	46	45.7	45.3

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

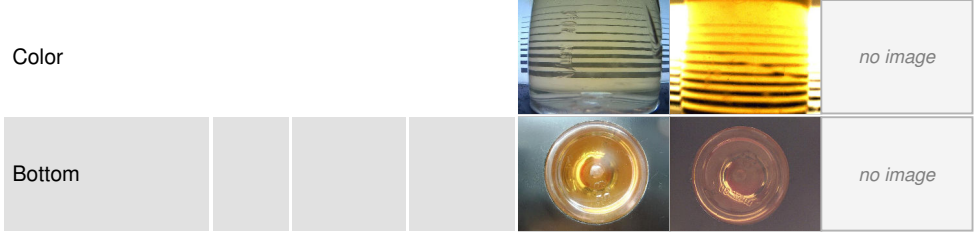

GRAPHS

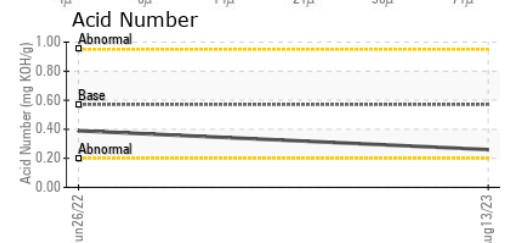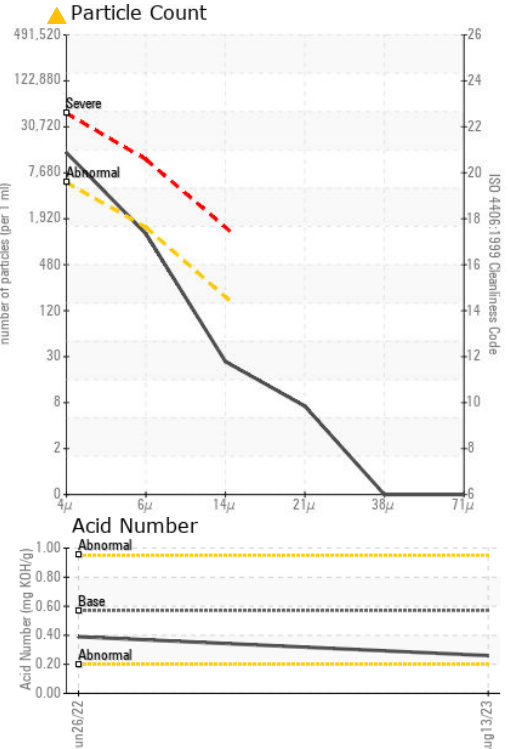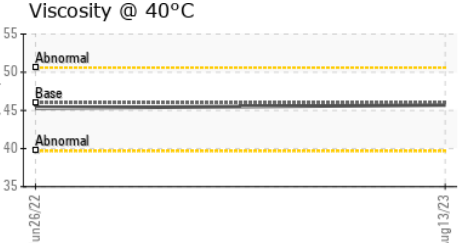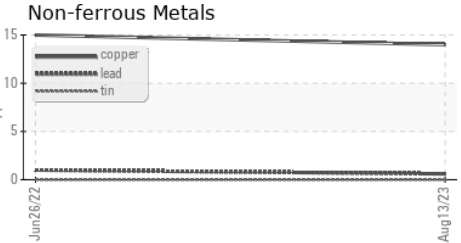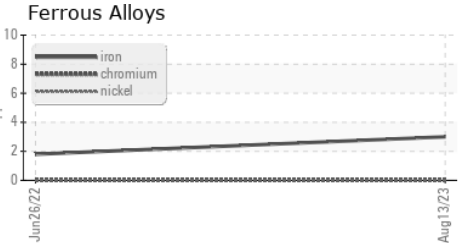

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC
Lab Number : 02575726
Unique Number : 5620777
Test Package : IND 2
Received : 14 Aug 2023
Diagnosed : 15 Aug 2023
Diagnostician : Wes Davis

Hydro Extrusion North
 5675 Kennedy Road
 Mississauga, ON
 CA L4Z 2H9
 Contact: Harsh Murria
 Harsh.murria@hydro.com
 T: (819)462-0479
 F: (866)462-6478

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.