




# PROBLEM SUMMARY

## Sample Rating Trend

ISO

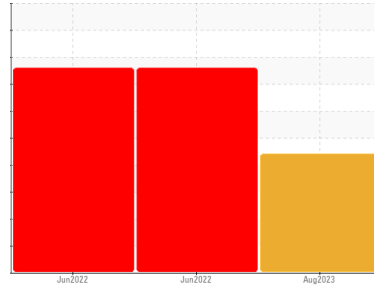


Machine Id  
**MAIN PRESS 4**

Component  
**Hydraulic System**

Fluid  
**PETRO CANADA HYDREX AW 46 (13000 LTR)**

## COMPONENT CONDITION SUMMARY

### Particle Trend

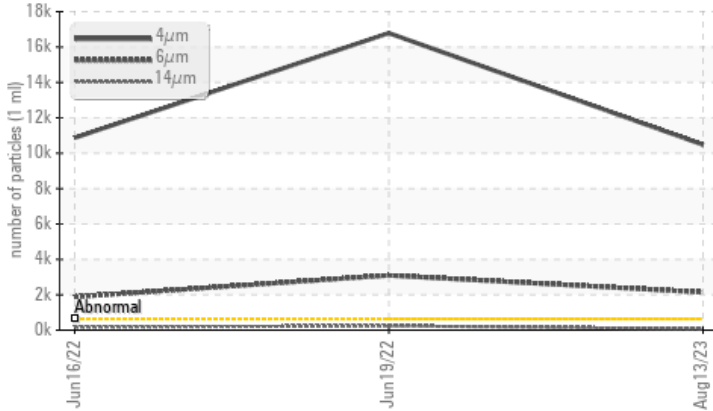

## RECOMMENDATION

Check seals and/or filters for points of contaminant entry. The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. We recommend you service the filters on this component. Resample in 30-45 days to monitor this situation. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using Advanced Oil Monitoring (AOM) kits for this system. The AOM test package includes advanced level testing to determine the suitability of turbine and large industrial compressor oils for continued use.

## PROBLEMATIC TEST RESULTS

Sample Status	ASTM D7647	SEVERE	SEVERE	SEVERE
Particles >4µm	>640	10479	16788	10872
Particles >6µm	>160	2142	3095	1880
Particles >14µm	>20	72	239	166
Particles >21µm	>4	9	52	42
Oil Cleanliness	ISO 4406 (c)	21/18/13	21/19/15	21/18/15

Customer Id: INDMIS  
 Sample No.: WC  
 Lab Number: 02575727  
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Wes Davis +1 905-569-8600 x223  
[wesd@wearcheck.ca](mailto:wesd@wearcheck.ca)

To change component or sample information:  
 Gloria Gonzalez +1 (289)291-4643 x4643  
[gloria.gonzalez@wearcheck.com](mailto:gloria.gonzalez@wearcheck.com)

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Filter	---	---	?	We recommend you service the filters on this component.
Resample	---	---	?	Resample in 30-45 days to monitor this situation.
Contact Required	---	---	?	Please contact your representative for information regarding the proper sampling kits for your service.
Alert	---	---	?	NOTE: We recommend using Advanced Oil Monitoring (AOM) kits for this system. The AOM test package includes advanced level testing to determine the suitability of turbine and large industrial compressor oils for continued use.
Check Breathers	---	---	?	The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather.
Check Seals	---	---	?	Check seals and/or filters for points of contaminant entry.

HISTORICAL DIAGNOSIS

ISO



19 Jun 2022 Diag: Wes Davis

We advise that you check all areas where contaminants can enter the system. We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. Resample in 30-45 days to monitor this situation. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using Advanced Oil Monitoring (AOM) kits for this system. The AOM test package includes advanced level testing to determine the suitability of turbine and large industrial compressor oils for continued use. All component wear rates are normal. Particles >14µm are severely high. Particles >21µm are severely high. Particles >6µm are severely high. Oil Cleanliness are severely high. Particles >4µm are severely high. The system cleanliness code is much higher than the acceptable limit for the target ISO 4406 cleanliness code. The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service (unconfirmed). The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

view report



ISO



16 Jun 2022 Diag: Wes Davis

We advise that you check all areas where contaminants can enter the system. We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. Resample in 30-45 days to monitor this situation. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using Advanced Oil Monitoring (AOM) kits for this system. The AOM test package includes advanced level testing to determine the suitability of turbine and large industrial compressor oils for continued use. All component wear rates are normal. Particles >14µm are severely high. Particles >21µm are severely high. Particles >6µm are severely high. Oil Cleanliness are severely high. Particles >4µm are severely high. The system cleanliness code is much higher than the acceptable limit for the target ISO 4406 cleanliness code. The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service (unconfirmed). The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.


view report





# OIL ANALYSIS REPORT

Sample Rating Trend

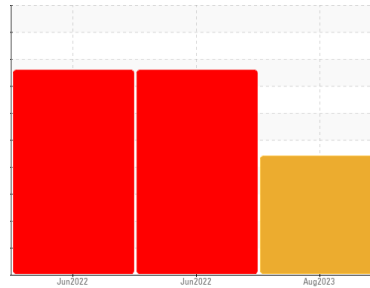

ISO



Machine Id  
**MAIN PRESS 4**

Component  
**Hydraulic System**

Fluid  
**PETRO CANADA HYDREX AW 46 (13000 LTR)**

## DIAGNOSIS

### Recommendation

Check seals and/or filters for points of contaminant entry. The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. We recommend you service the filters on this component. Resample in 30-45 days to monitor this situation. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using Advanced Oil Monitoring (AOM) kits for this system. The AOM test package includes advanced level testing to determine the suitability of turbine and large industrial compressor oils for continued use.

### Wear

All component wear rates are normal.

### Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil. The system cleanliness code is much higher than the acceptable limit for the target ISO 4406 cleanliness code.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service (unconfirmed). The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>WC</b>	WC	WC
Sample Date	Client Info	<b>13 Aug 2023</b>	19 Jun 2022	16 Jun 2022
Machine Age	mths Client Info	<b>0</b>	0	0
Oil Age	mths Client Info	<b>0</b>	6	6
Oil Changed	Client Info	<b>N/A</b>	Filtered	Filtered
Sample Status		<b>SEVERE</b>	SEVERE	SEVERE

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185(m) >20	<b>12</b>	8	8
Chromium	ppm ASTM D5185(m) >20	<b>2</b>	1	1
Nickel	ppm ASTM D5185(m) >20	<b>0</b>	<1	<1
Titanium	ppm ASTM D5185(m)	<b>0</b>	0	0
Silver	ppm ASTM D5185(m)	<b>0</b>	0	0
Aluminum	ppm ASTM D5185(m) >20	<b>&lt;1</b>	0	<1
Lead	ppm ASTM D5185(m) >20	<b>&lt;1</b>	<1	<1
Copper	ppm ASTM D5185(m) >20	<b>5</b>	4	4
Tin	ppm ASTM D5185(m) >20	<b>0</b>	0	0
Antimony	ppm ASTM D5185(m)	<b>0</b>	0	0
Vanadium	ppm ASTM D5185(m)	<b>0</b>	0	0
Beryllium	ppm ASTM D5185(m)	<b>0</b>	0	0
Cadmium	ppm ASTM D5185(m)	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185(m) 0.0	<b>&lt;1</b>	<1	<1
Barium	ppm ASTM D5185(m) 0.0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185(m) 0.1	<b>0</b>	0	0
Manganese	ppm ASTM D5185(m) 0.0	<b>&lt;1</b>	<1	<1
Magnesium	ppm ASTM D5185(m) 0.3	<b>2</b>	2	2
Calcium	ppm ASTM D5185(m) 50	<b>50</b>	50	50
Phosphorus	ppm ASTM D5185(m) 315	<b>355</b>	332	334
Zinc	ppm ASTM D5185(m) 411	<b>392</b>	403	406
Sulfur	ppm ASTM D5185(m) 712	<b>735</b>	719	720
Lithium	ppm ASTM D5185(m)	<b>&lt;1</b>	<1	<1

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185(m) >15	<b>&lt;1</b>	<1	<1
Sodium	ppm ASTM D5185(m)	<b>2</b>	2	2
Potassium	ppm ASTM D5185(m) >20	<b>2</b>	2	2

## FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >640	<b>10479</b>	16788	10872
Particles >6µm	ASTM D7647 >160	<b>2142</b>	3095	1880
Particles >14µm	ASTM D7647 >20	<b>72</b>	239	166
Particles >21µm	ASTM D7647 >4	<b>9</b>	52	42
Particles >38µm	ASTM D7647 >3	<b>0</b>	3	2
Particles >71µm	ASTM D7647 >3	<b>0</b>	1	0
Oil Cleanliness	ISO 4406 (c) >16/14/11	<b>21/18/13</b>	21/19/15	21/18/15


## FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g ASTM D974* 0.45	<b>0.33</b>	0.31	0.31




# OIL ANALYSIS REPORT


### Particle Trend

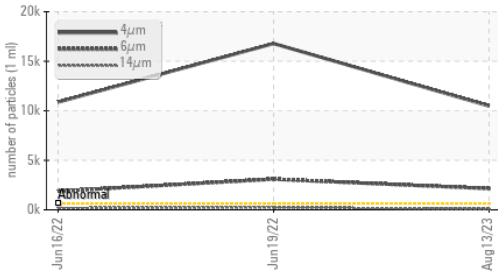


### Particle Trend

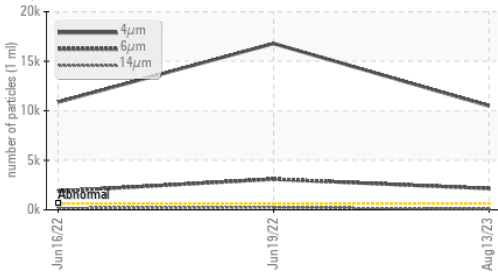

### Acid Number

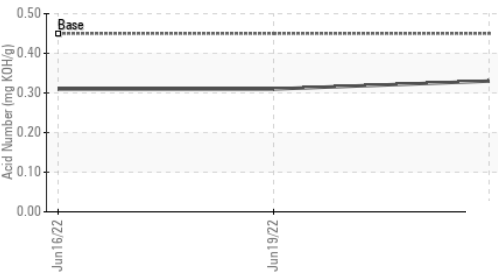


### Viscosity @ 40°C

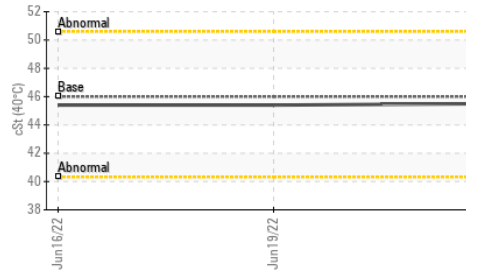

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.05	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	46.0	45.5	45.4

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

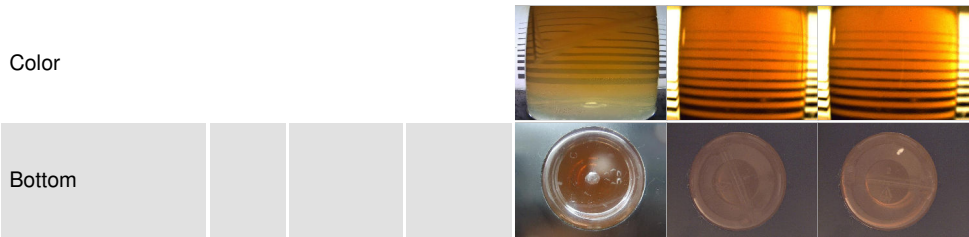


### GRAPHS


#### Ferrous Alloys

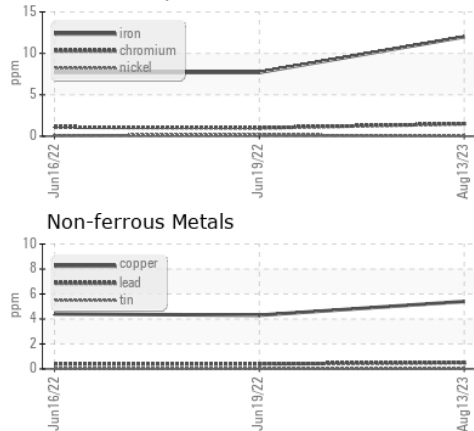


#### Non-ferrous Metals

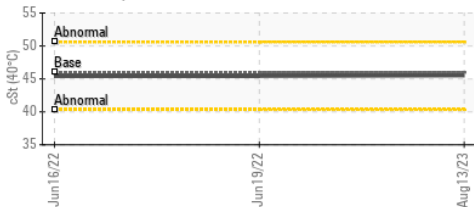

#### Viscosity @ 40°C



#### Particle Count

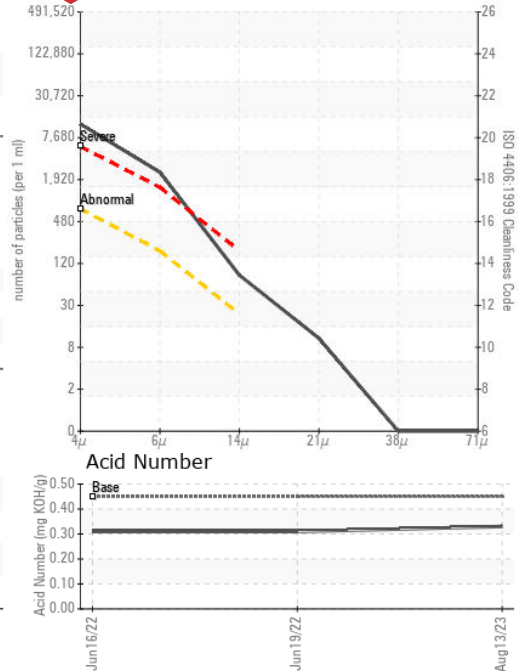

ISO 17025:2017  
Accredited  
Laboratory

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC  
**Lab Number** : 02575727  
**Unique Number** : 5620778  
**Test Package** : IND 2

**Received** : 14 Aug 2023  
**Diagnosed** : 15 Aug 2023  
**Diagnostician** : Wes Davis

**Hydro Extrusion North**  
 5675 Kennedy Road  
 Mississauga, ON  
 CA L4Z 2H9  
 Contact: Harsh Murria  
 Harsh.murria@hydro.com  
 T: (819)462-0479  
 F: (866)462-6478

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.