




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

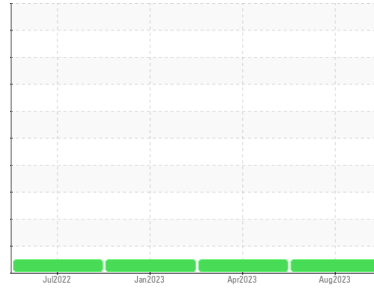

Area  
**Main Engine #2**  
 Machine Id  
**Main Engine #2 Sump**  
 Component  
**Right Main Engine**  
 Fluid  
**CASTROL MHP 154 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.  
 NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

### Wear

All component wear rates are normal. The direct-reading & analytical ferrographic results are normal indicating no abnormal wear in the system.

### Contaminants

There is no indication of any contamination in the oil.

### Oil Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0810856</b>	WC0763456	WC0763487
Sample Date	Client Info			<b>05 Aug 2023</b>	09 Apr 2023	29 Jan 2023
Machine Age	hrs	Client Info		<b>0</b>	0	0
Oil Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed	Client Info			<b>Oil Added</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>4.0		<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184*		<b>0</b>	0	0
Iron	ppm	ASTM D5185(m)	>75	<b>4</b>	4	4
Chromium	ppm	ASTM D5185(m)	>8	<b>0</b>	0	0
Nickel	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185(m)	>3	<b>0</b>	<1	<1
Silver	ppm	ASTM D5185(m)	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>15	<b>2</b>	2	2
Lead	ppm	ASTM D5185(m)	>18	<b>&lt;1</b>	<1	<1
Copper	ppm	ASTM D5185(m)	>80	<b>2</b>	2	4
Tin	ppm	ASTM D5185(m)	>14	<b>0</b>	<1	0
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<b>2</b>	2	2
Barium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1
Manganese	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185(m)		<b>26</b>	26	26
Calcium	ppm	ASTM D5185(m)		<b>5368</b>	5608	5827
Phosphorus	ppm	ASTM D5185(m)		<b>915</b>	949	983
Zinc	ppm	ASTM D5185(m)		<b>1011</b>	995	1015
Sulfur	ppm	ASTM D5185(m)		<b>9957</b>	10271	10357
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>20	<b>6</b>	6	9
Sodium	ppm	ASTM D5185(m)	>75	<b>2</b>	1	2
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	1	0

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>2	<b>0</b>	0	0
Nitration	Abs/cm	ASTM D7624*	>20	<b>9.4</b>	8.5	8.4
Sulfation	Abs.1mm	ASTM D7415*	>30	<b>14.9</b>	13.5	16.4



# OIL ANALYSIS REPORT



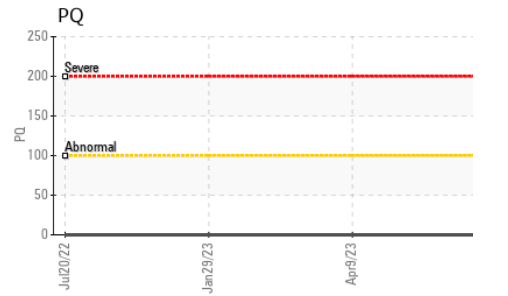
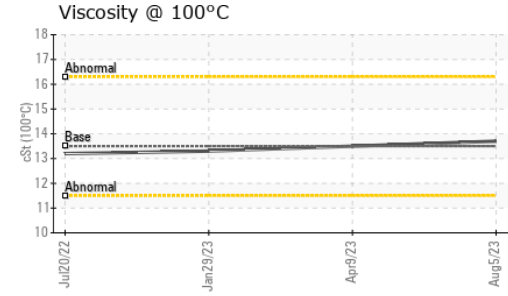
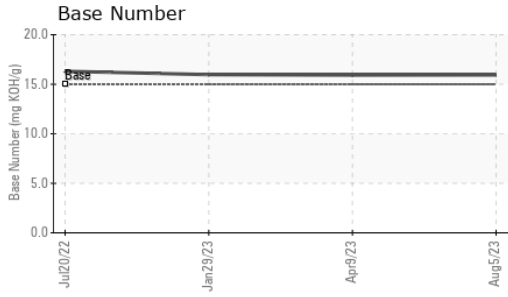


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	<b>7.4</b>	6.8	7.6
Base Number (BN)	mg KOH/g	ASTM D2896*	15.0	<b>15.93</b>	15.91	15.97

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---
Precipitate	scalar	Visual*	NONE	<b>NONE</b>	---	---
Silt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Debris	scalar	Visual*	NONE	<b>VLITE</b>	---	---
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	---	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	<b>NEG</b>	NEG	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	13.5	<b>13.7</b>	13.5	13.3

## GRAPHS

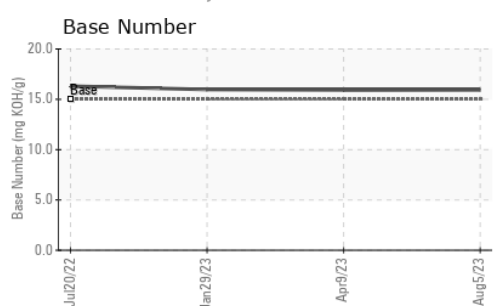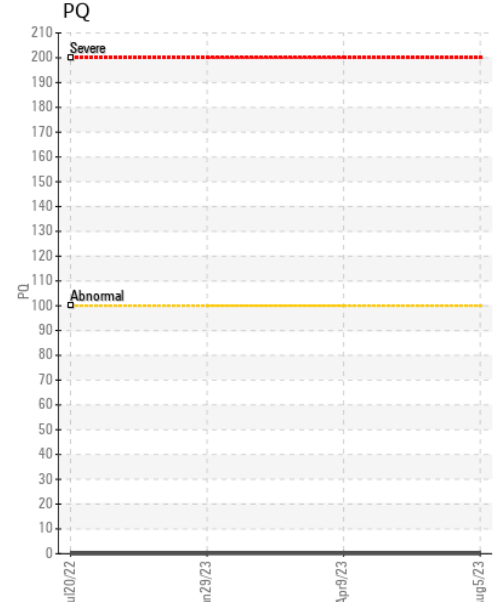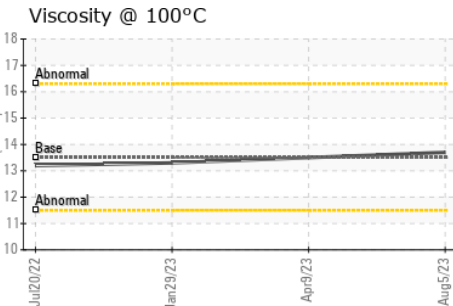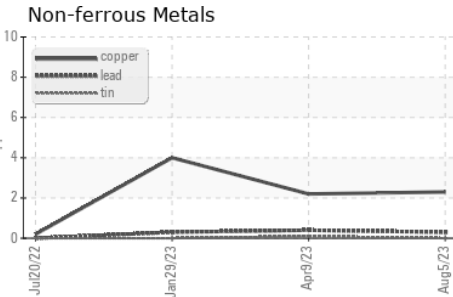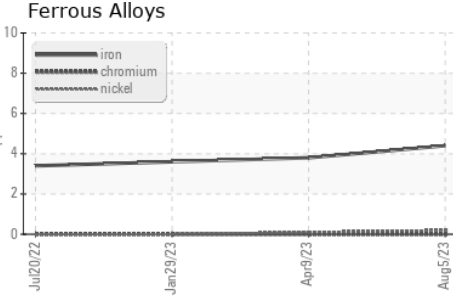

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0810856 **Received** : 15 Aug 2023  
**Lab Number** : **02575873** **Diagnosed** : 17 Aug 2023  
**Unique Number** : 5628933 **Diagnostician** : Kevin Marson  
**Test Package** : MAR 3 ( Additional Tests: Visual )




**Canadian Coast Guard**  
 CCGS Vincent Massey, 101 Boul. Champlain  
 Quebec, QC  
 CA G1K 7Y7  
 Contact: Vincent Massey  
 vincentmasseyse@ccgs-ngcc.gc.ca  
 T: (418)573-7423  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.



# FERROGRAPHY REPORT

Area  
**Main Engine #2**  
 Machine Id  
**Main Engine #2 Sump**  
 Component  
**Right Main Engine**  
 Fluid  
**CASTROL MHP 154 (--- GAL)**

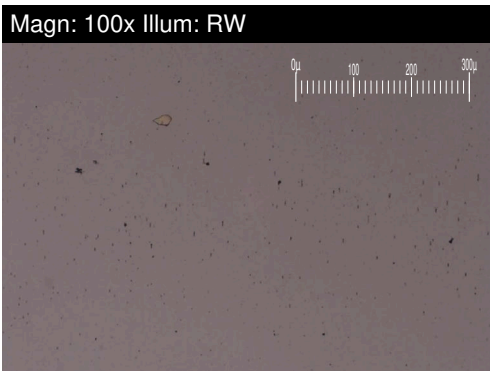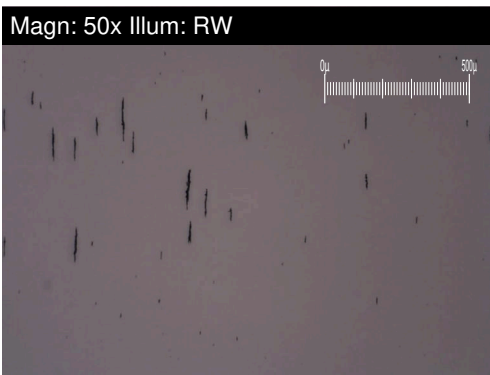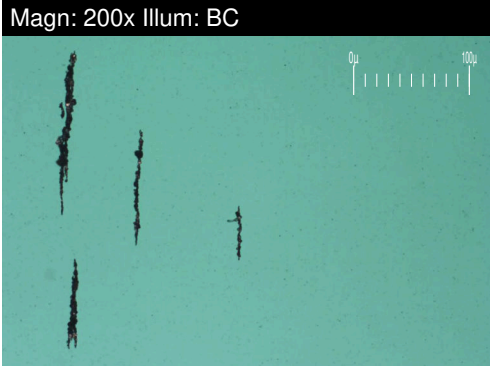


DR-FERROGRAPHY		method	limit/base	current	history1	history2
Large Particles		DR-Ferr*		<b>5.8</b>	2.8	6.5
Small Particles		DR-Ferr*		<b>5.3</b>	1.8	4.8
Total Particles		DR-Ferr*	>---	<b>11.1</b>	4.6	11.3
Large Particles Percentage	%	DR-Ferr*		<b>4.5</b>	21.7	15
Severity Index		DR-Ferr*		<b>3</b>	3	11

FERROGRAPHY		method	limit/base	current	history1	history2
Ferrous Rubbing	Scale 0-10	ASTM D7684*		<b>2</b>	1	2
Ferrous Sliding	Scale 0-10	ASTM D7684*				
Ferrous Cutting	Scale 0-10	ASTM D7684*				
Ferrous Rolling	Scale 0-10	ASTM D7684*		<b>1</b>	1	1
Ferrous Break-in	Scale 0-10	ASTM D7684*				
Ferrous Spheres	Scale 0-10	ASTM D7684*				
Ferrous Black Oxides	Scale 0-10	ASTM D7684*		<b>1</b>	1	1
Ferrous Red Oxides	Scale 0-10	ASTM D7684*				
Ferrous Corrosive	Scale 0-10	ASTM D7684*				
Ferrous Other	Scale 0-10	ASTM D7684*				
Nonferrous Rubbing	Scale 0-10	ASTM D7684*				
Nonferrous Sliding	Scale 0-10	ASTM D7684*				
Nonferrous Cutting	Scale 0-10	ASTM D7684*				
Nonferrous Rolling	Scale 0-10	ASTM D7684*				
Nonferrous Other	Scale 0-10	ASTM D7684*				
Carbonaceous Material	Scale 0-10	ASTM D7684*				
Lubricant Degradation	Scale 0-10	ASTM D7684*				
Sand/Dirt	Scale 0-10	ASTM D7684*		<b>1</b>	1	1
Fibres	Scale 0-10	ASTM D7684*				
Spheres	Scale 0-10	ASTM D7684*				
Other	Scale 0-10	ASTM D7684*		<b>1</b>	1	1

## WEAR

All component wear rates are normal. The direct-reading & analytical ferrographic results are normal indicating no abnormal wear in the system.

## DR Ferrography

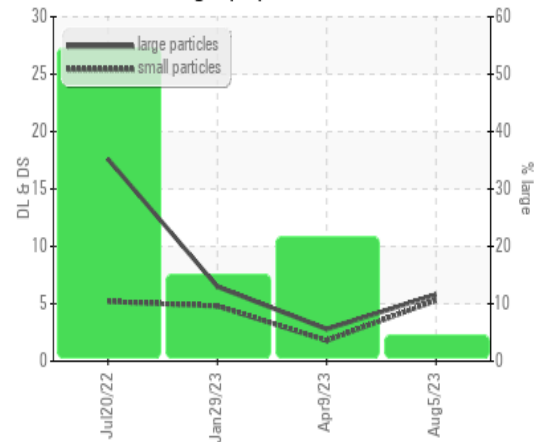

*This page left intentionally blank*