



FUEL REPORT

Sample Rating Trend


NORMAL



Machine Id
KIOTI XY8600781

Component
Diesel Fuel

Fluid
No.2 DIESEL FUEL (LOW-SULPHUR) (--- GAL)

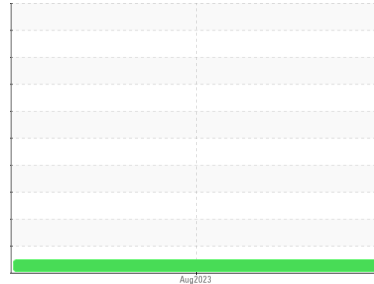

DIAGNOSIS

Recommendation

Laboratory test indicate that this fuel is suitable for use and meets all test requirements. Resample at the next service interval to monitor.

Corrosion

{not applicable}

Contaminants

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The water content is negligible. There is no indication of any contamination in the diesel fuel.

Fuel Condition

All laboratory tests indicate that this sample meets specifications for No.2 diesel fuel, low sulfur (US EPA/CGSB-3.517-3 type B).

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			KT0000468	---	---
Sample Date	Client Info			10 Aug 2023	---	---
Machine Age	hrs	Client Info		65	---	---
Sample Status				NORMAL	---	---

PHYSICAL PROPERTIES		method	limit/base	current	history1	history2
Specific Gravity		ASTM D1298*	0.839	0.826	---	---
Fuel Color	text	Visual Screen*	Yellow	Yellow	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	3.0	2	---	---
Pensky-Martens Flash Point	°C	ASTM D7215*	52	52	---	---

SULFUR CONTENT		method	limit/base	current	history1	history2
Sulfur	ppm	ASTM D5185(m)	250	17	---	---

DISTILLATION		method	limit/base	current	history1	history2
Initial Boiling Point	°C	ASTM D2887*	165	165	---	---
5% Distillation Point	°C	ASTM D2887*		183	---	---
10% Distill Point	°C	ASTM D2887*	201	191	---	---
15% Distillation Point	°C	ASTM D2887*		198	---	---
20% Distill Point	°C	ASTM D2887*	216	205	---	---
30% Distill Point	°C	ASTM D2887*	230	218	---	---
40% Distill Point	°C	ASTM D2887*	243	230	---	---
50% Distill Point	°C	ASTM D2887*	255	243	---	---
60% Distill Point	°C	ASTM D2887*	267	254	---	---
70% Distill Point	°C	ASTM D2887*	280	266	---	---
80% Distill Point	°C	ASTM D2887*	295	280	---	---
85% Distillation Point	°C	ASTM D2887*		291	---	---
90% Distill Point	°C	ASTM D2887*	310	302	---	---
95% Distillation Point	°C	ASTM D2887*		322	---	---
Final Boiling Point	°C	ASTM D2887*	341	343	---	---





IGNITION QUALITY		method	limit/base	current	history1	history2
API Gravity		ASTM D1298*	37.7	39	---	---
Cetane Index		ASTM D4737*	<40.0	49	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	<1.0	0	---	---
Sodium	ppm	ASTM D5185(m)	<0.1	0	---	---
Potassium	ppm	ASTM D5185(m)	<0.1	<1	---	---
Water	%	ASTM D6304*	<0.05	0.003	---	---
ppm Water	ppm	ASTM D6304*	<500	30.9	---	---

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>2500	1286	---	---
Particles >6µm		ASTM D7647	>640	445	---	---
Particles >14µm		ASTM D7647	>80	51	---	---
Particles >21µm		ASTM D7647	>20	12	---	---
Particles >38µm		ASTM D7647	>4	0	---	---
Particles >71µm		ASTM D7647	>3	0	---	---
Oil Cleanliness		ISO 4406 (c)	>18/16/13	17/16/13	---	---






FUEL REPORT

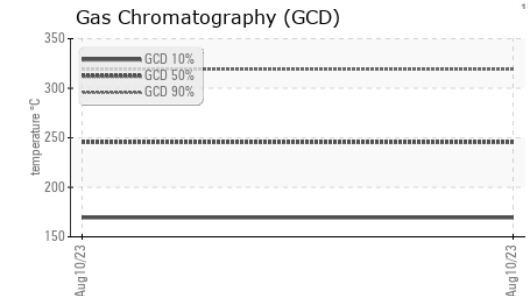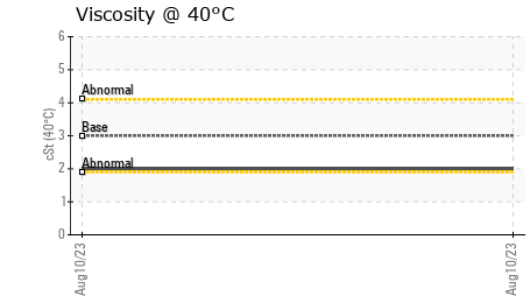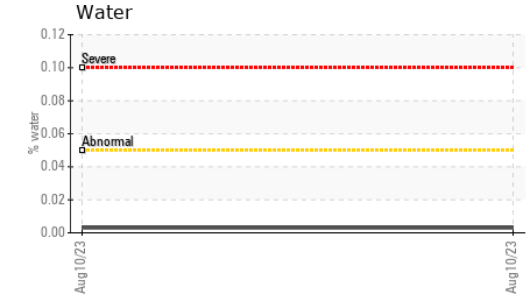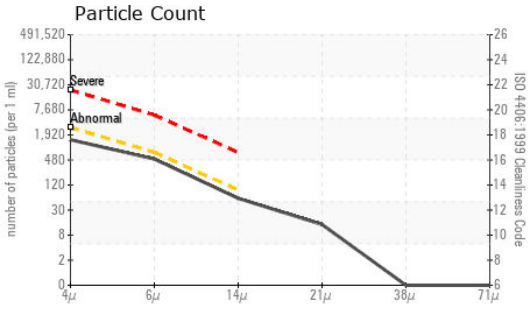

HEAVY METALS	method	limit/base	current	history1	history2	
Aluminum	ppm	ASTM D5185(m)	<0.1	0	---	---
Nickel	ppm	ASTM D5185(m)	<0.1	0	---	---
Lead	ppm	ASTM D5185(m)	<0.1	0	---	---
Vanadium	ppm	ASTM D5185(m)	<0.1	0	---	---
Iron	ppm	ASTM D5185(m)	<0.1	<1	---	---
Calcium	ppm	ASTM D5185(m)	<0.1	0	---	---
Magnesium	ppm	ASTM D5185(m)	<0.1	0	---	---
Phosphorus	ppm	ASTM D5185(m)	<0.1	0	---	---
Zinc	ppm	ASTM D5185(m)	<0.1	<1	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

GRAPHS

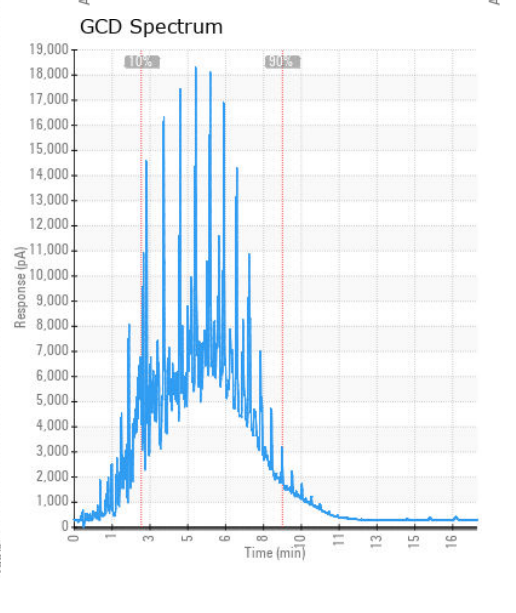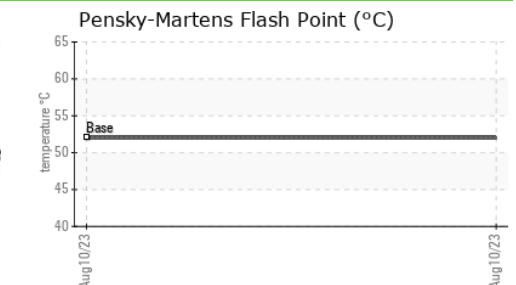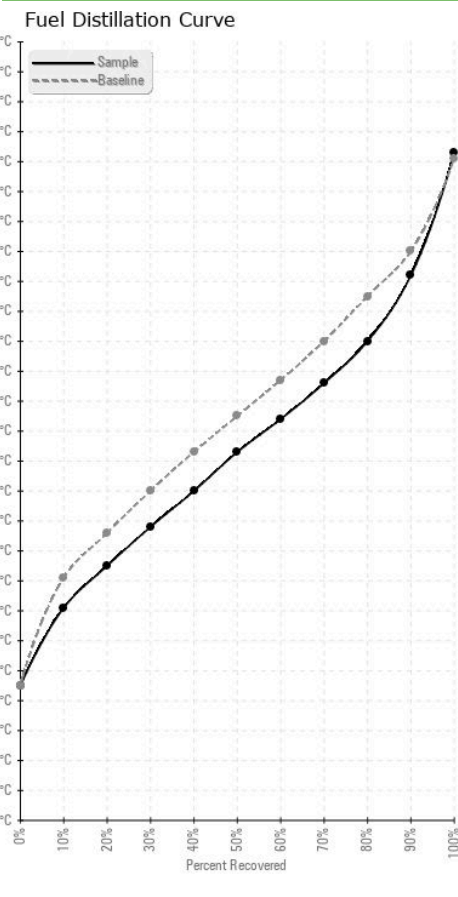

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : KT0000468 **Received** : 15 Aug 2023
Lab Number : 02576004 **Diagnosed** : 21 Aug 2023
Unique Number : 5629064 **Diagnostician** : Kevin Marson
Test Package : DF-2 (Additional Tests: GC-PercFuel, Spat, Visual)

VIP MECHANICAL
 39 INDUSTRIAL ST
 DIEPPE, NB
 CA E1A 2B9
 Contact: Service Manager
 luccormier.vip@gmail.com
 T: (506)334-0391
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.