



OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Area
[5996]
Machine Id
73

Component
Diesel Engine
Fluid

DIESEL ENGINE OIL SAE 10W30 (--- GAL)



DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

Metal levels are typical for a new component breaking in.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0790235	---	---
Sample Date	Client Info		11 Aug 2023	---	---
Machine Age	mls	Client Info	9398	---	---
Oil Age	mls	Client Info	0	---	---
Oil Changed	Client Info		Not Chngd	---	---
Sample Status			NORMAL	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	---	---
Glycol	WC Method		NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>90	68	---
Chromium	ppm	ASTM D5185(m)	>20	2	---
Nickel	ppm	ASTM D5185(m)	>2	<1	---
Titanium	ppm	ASTM D5185(m)	>2	<1	---
Silver	ppm	ASTM D5185(m)	>2	<1	---
Aluminum	ppm	ASTM D5185(m)	>20	12	---
Lead	ppm	ASTM D5185(m)	>40	4	---
Copper	ppm	ASTM D5185(m)	>330	32	---
Tin	ppm	ASTM D5185(m)	>15	3	---
Antimony	ppm	ASTM D5185(m)		0	---
Vanadium	ppm	ASTM D5185(m)		0	---
Beryllium	ppm	ASTM D5185(m)		0	---
Cadmium	ppm	ASTM D5185(m)		0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	250	39	---
Barium	ppm	ASTM D5185(m)	10	6	---
Molybdenum	ppm	ASTM D5185(m)	100	10	---
Manganese	ppm	ASTM D5185(m)		6	---
Magnesium	ppm	ASTM D5185(m)	450	724	---
Calcium	ppm	ASTM D5185(m)	3000	1359	---
Phosphorus	ppm	ASTM D5185(m)	1150	754	---
Zinc	ppm	ASTM D5185(m)	1350	818	---
Sulfur	ppm	ASTM D5185(m)	4250	2400	---
Lithium	ppm	ASTM D5185(m)		<1	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	43	---
Sodium	ppm	ASTM D5185(m)		7	---
Potassium	ppm	ASTM D5185(m)	>20	44	---

INFRA-RED


	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>6	0.2	---
Nitration	Abs/cm	ASTM D7624*	>20	10.6	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	24.0	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414*	>25	20.9	---











OIL ANALYSIS REPORT

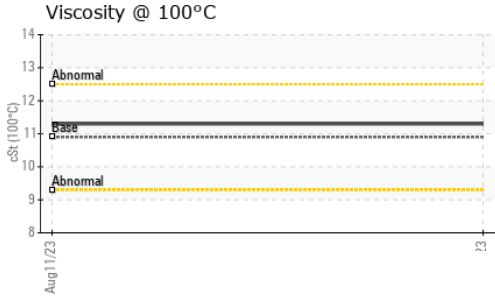

VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	---
Free Water	scalar	Visual*		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	10.9	11.3	---

GRAPHS

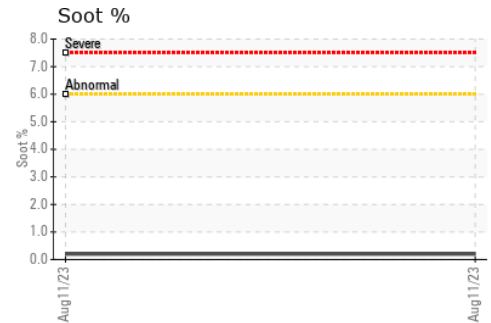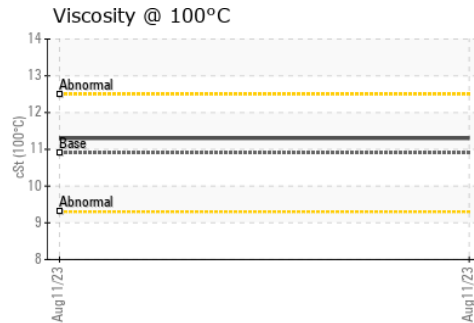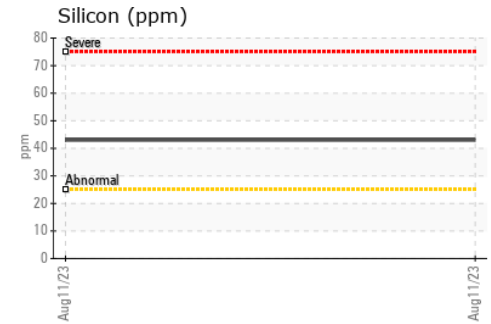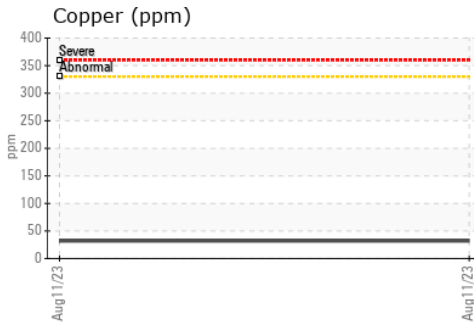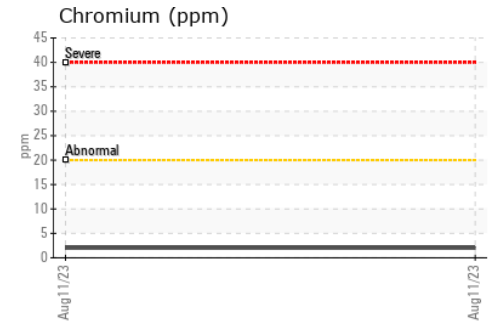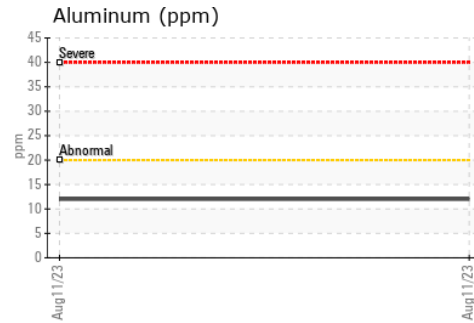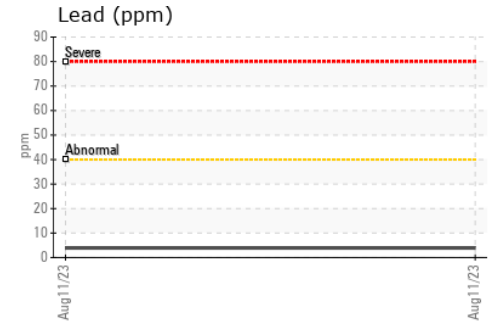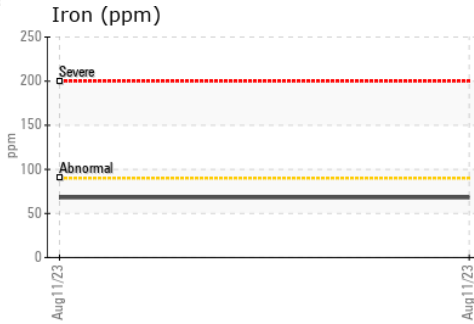

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0790235 **Received** : 16 Aug 2023
Lab Number : 02576021 **Diagnosed** : 16 Aug 2023
Unique Number : 5629081 **Diagnostician** : Wes Davis
Test Package : MOB 1

CANADA CLEAN FUELS
 4425 CHESSWOOD DR
 TORONTO, ON
 CA M3J 2C2
 Contact: Rory Grant
 rgrant@canadacleanfuels.com
 T: (647)882-6850
 F: (416)521-9368

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.