




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Machine Id
John Deere 210G JM210G
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 15W40 (--- LTR)

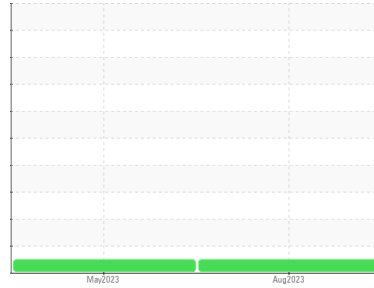

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0818958	WC0818948	---
Sample Date	Client Info		11 Aug 2023	12 May 2023	---
Machine Age	hrs	Client Info	5394	5228	---
Oil Age	hrs	Client Info	200	0	---
Oil Changed	Client Info		Changed	Not Changd	---
Sample Status			NORMAL	NORMAL	---

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>2.1	<1.0	<1.0	---
Glycol	WC Method		NEG	NEG	---

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>51	38	9	---
Chromium	ppm	ASTM D5185(m)	>11	<1	0	---
Nickel	ppm	ASTM D5185(m)	>5	<1	<1	---
Titanium	ppm	ASTM D5185(m)		0	0	---
Silver	ppm	ASTM D5185(m)	>3	0	0	---
Aluminum	ppm	ASTM D5185(m)	>31	4	2	---
Lead	ppm	ASTM D5185(m)	>26	2	<1	---
Copper	ppm	ASTM D5185(m)	>26	1	<1	---
Tin	ppm	ASTM D5185(m)	>4	<1	0	---
Antimony	ppm	ASTM D5185(m)		0	0	---
Vanadium	ppm	ASTM D5185(m)		0	0	---
Beryllium	ppm	ASTM D5185(m)		0	0	---
Cadmium	ppm	ASTM D5185(m)		0	0	---

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	250	70	74	---
Barium	ppm	ASTM D5185(m)	10	0	0	---
Molybdenum	ppm	ASTM D5185(m)	100	60	41	---
Manganese	ppm	ASTM D5185(m)		<1	<1	---
Magnesium	ppm	ASTM D5185(m)	450	373	315	---
Calcium	ppm	ASTM D5185(m)	3000	1876	1851	---
Phosphorus	ppm	ASTM D5185(m)	1150	1015	1048	---
Zinc	ppm	ASTM D5185(m)	1350	1138	1117	---
Sulfur	ppm	ASTM D5185(m)	4250	2791	2849	---
Lithium	ppm	ASTM D5185(m)		<1	<1	---

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>22	6	5	---
Sodium	ppm	ASTM D5185(m)	>158	6	3	---
Potassium	ppm	ASTM D5185(m)	>20	3	0	---

INFRA-RED


	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>3	0.4	0	---
Nitration	Abs/cm	ASTM D7624*	>20	7.0	4.5	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	20.5	18.4	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	ASTM D7414*	>25	14.0	12.1	---











OIL ANALYSIS REPORT

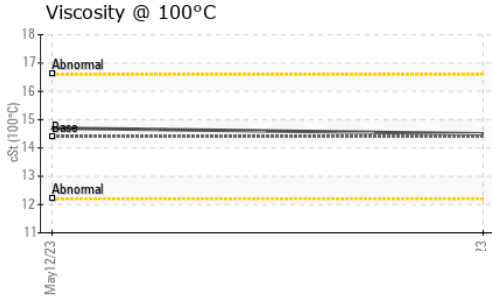

VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.21	NEG	---
Free Water	scalar	Visual*		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	14.4	14.5	14.7

GRAPHS

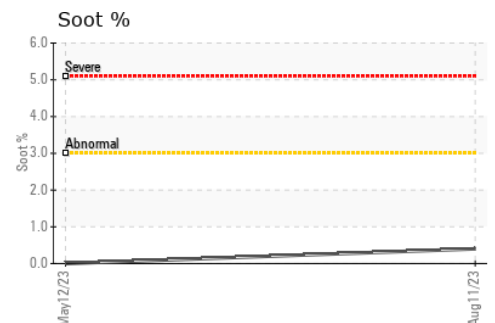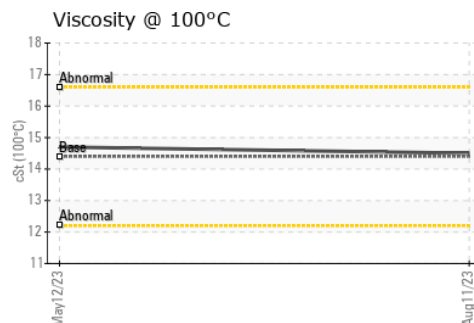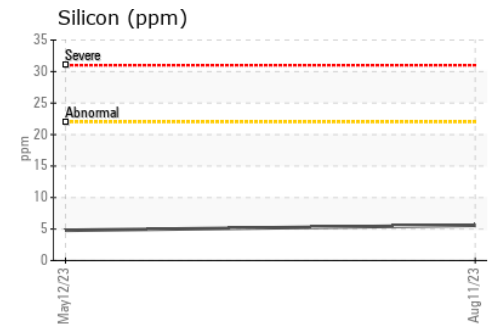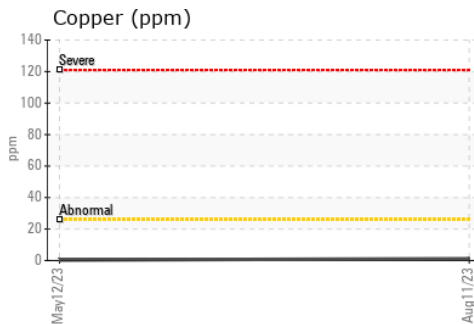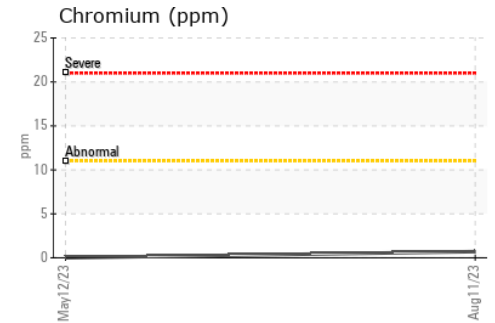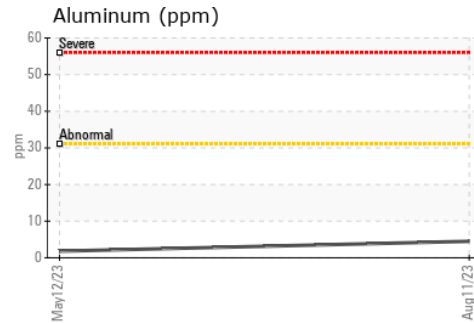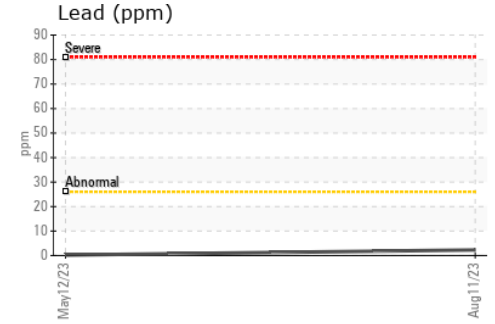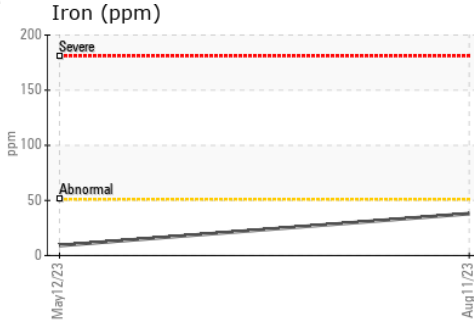

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
 Sample No. : WC0818958 Received : 16 Aug 2023
 Lab Number : 02576023 Diagnosed : 16 Aug 2023
 Unique Number : 5629083 Diagnostician : Wes Davis
 Test Package : MOB 1

JD MOBILE REPAIR SERVICE
 183841 GREY ROAD #9
 HOLSTEIN, ON
 CA N0G 2A0
 Contact: John Dowling
 dozerdoctor@hotmail.com
 T: (519)604-8247
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.