




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

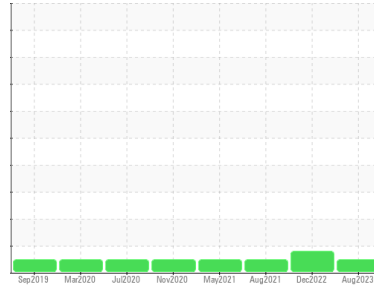

Machine Id  
**CO6-0223 (S/N 35350223)**

Component  
**Port Main Engine**

Fluid  
**SHELL ROTELLA T 15W40 (37 LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal. The direct-reading & analytical ferrographic results are normal indicating no abnormal wear in the system.

### Contaminants

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

### Oil Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0770688</b>	WC0696346	WC0535379
Sample Date	Client Info			<b>14 Aug 2023</b>	03 Dec 2022	25 Aug 2021
Machine Age	hrs	Client Info		<b>2548</b>	2275	1500
Oil Age	hrs	Client Info		<b>272</b>	600	242
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	MARGINAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>4.0		<b>&lt;1.0</b>	▲ 3.1	<1.0
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184*		<b>0</b>	0	---
Iron	ppm	ASTM D5185(m)	>75	<b>13</b>	13	7
Chromium	ppm	ASTM D5185(m)	>8	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185(m)	>3	<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	0	<1
Aluminum	ppm	ASTM D5185(m)	>15	<b>2</b>	3	<1
Lead	ppm	ASTM D5185(m)	>18	<b>1</b>	2	<1
Copper	ppm	ASTM D5185(m)	>80	<b>26</b>	32	6
Tin	ppm	ASTM D5185(m)	>14	<b>&lt;1</b>	<1	<1
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	35	<b>53</b>	37	121
Barium	ppm	ASTM D5185(m)	0	<b>0</b>	0	<1
Molybdenum	ppm	ASTM D5185(m)	0	<b>59</b>	78	4
Manganese	ppm	ASTM D5185(m)	0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185(m)	10	<b>13</b>	15	55
Calcium	ppm	ASTM D5185(m)	2340	<b>2155</b>	2228	2109
Phosphorus	ppm	ASTM D5185(m)	1110	<b>1063</b>	1071	1022
Zinc	ppm	ASTM D5185(m)	1210	<b>1157</b>	1171	1150
Sulfur	ppm	ASTM D5185(m)	3890	<b>2986</b>	3043	2974
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>20	<b>3</b>	4	3
Sodium	ppm	ASTM D5185(m)	>75	<b>3</b>	3	2
Potassium	ppm	ASTM D5185(m)	>20	<b>3</b>	<1	7

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*		<b>0.8</b>	0.4	0.1
Nitration	Abs/cm	ASTM D7624*	>20	<b>9.2</b>	9.9	7.2
Sulfation	Abs.1mm	ASTM D7415*	>30	<b>22.6</b>	22.5	21.1



# OIL ANALYSIS REPORT



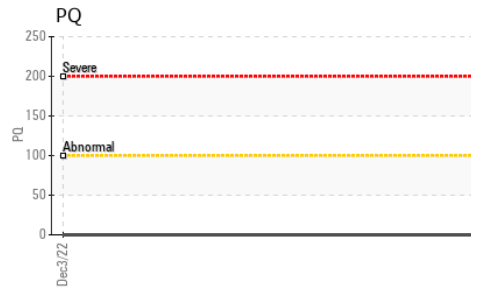
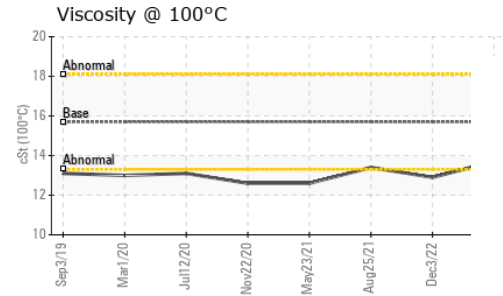
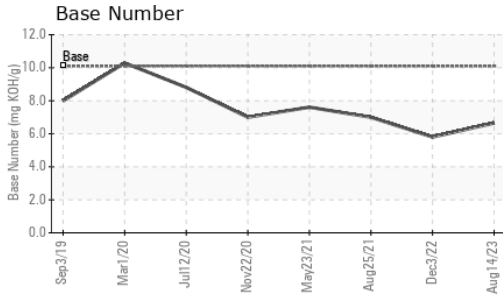


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>16.3</b>	17.3	16.4
Base Number (BN)	mg KOH/g	ASTM D2896*	10.1	<b>6.65</b>	5.80	7.00

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.1	<b>NEG</b>	NEG	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15.7	<b>13.7</b>	12.9	13.4

## GRAPHS

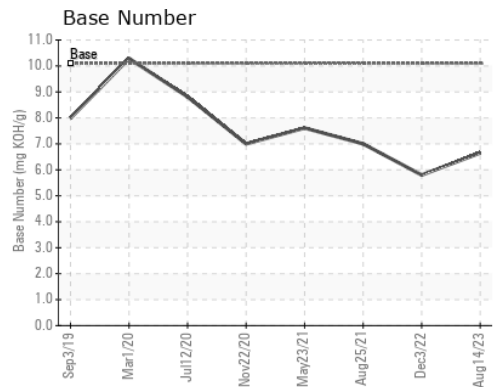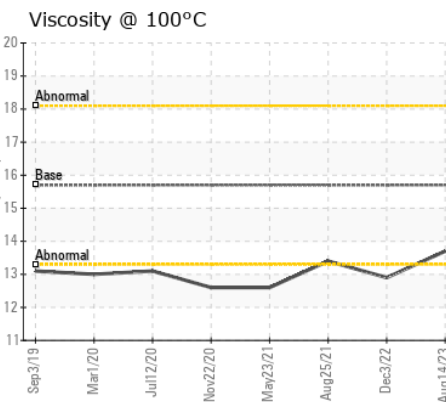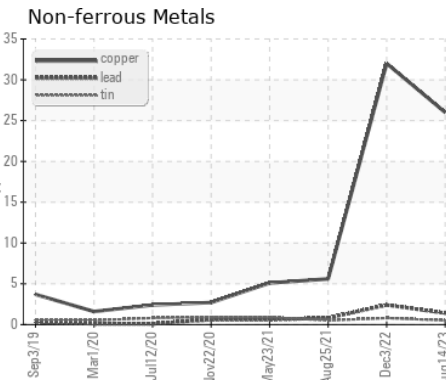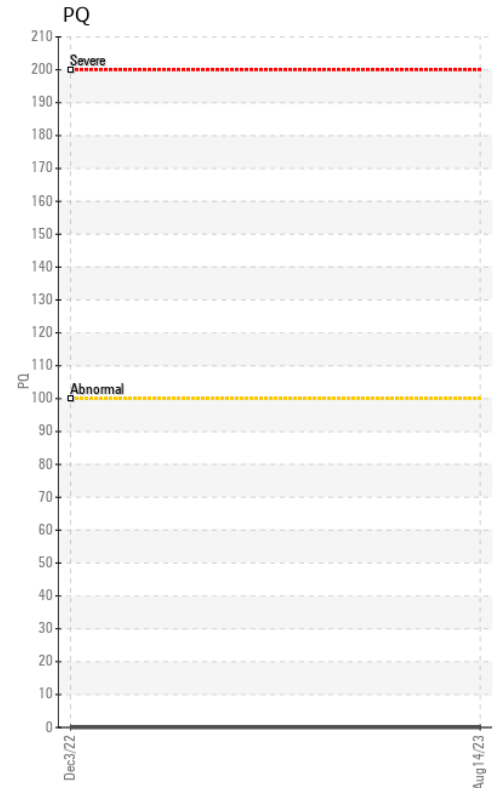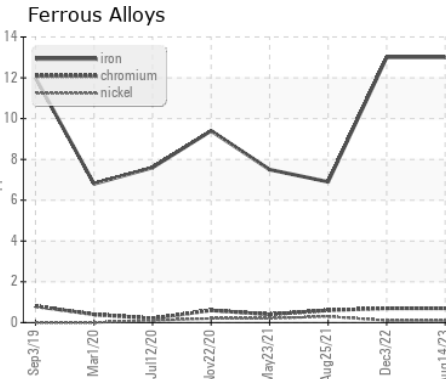

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
 Sample No. : WC0770688  
 Lab Number : 02576074  
 Unique Number : 5629134  
 Test Package : MAR 3

**CANADIAN COAST GUARD**  
 CCGS COVE ISLE, 401 KING STREET WEST  
 PRESCOTT, ON  
 CA N9V 1X3  
 Contact: Laurie Bosley  
 Laurie.Bosley@dfo-mpo.gc.ca  
 T:  
 F: (519)383-1994

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

# FERROGRAPHY REPORT

Machine Id  
**CO6-0223 (S/N 35350223)**  
 Component  
**Port Main Engine**  
 Fluid  
**SHELL ROTELLA T 15W40 (37 LTR)**


Magn: 200x Illum: BC



Magn: 50x Illum: RW



Magn: 100x Illum: RW

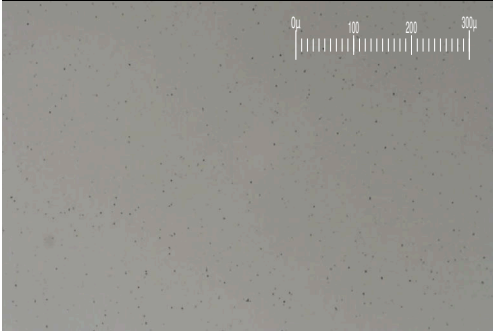


DR-FERROGRAPHY		method	limit/base	current	history1	history2
Large Particles		DR-Ferr*		<b>6.1</b>	8.5	---
Small Particles		DR-Ferr*		<b>5.0</b>	6.4	---
Total Particles		DR-Ferr*	>---	<b>11.1</b>	14.9	---
Large Particles Percentage	%	DR-Ferr*		<b>9.9</b>	14.1	---
Severity Index		DR-Ferr*		<b>7</b>	18	---

FERROGRAPHY		method	limit/base	current	history1	history2
Ferrous Rubbing	Scale 0-10	ASTM D7684*		1	2	
Ferrous Sliding	Scale 0-10	ASTM D7684*				
Ferrous Cutting	Scale 0-10	ASTM D7684*				
Ferrous Rolling	Scale 0-10	ASTM D7684*		1	1	
Ferrous Break-in	Scale 0-10	ASTM D7684*				
Ferrous Spheres	Scale 0-10	ASTM D7684*				
Ferrous Black Oxides	Scale 0-10	ASTM D7684*				
Ferrous Red Oxides	Scale 0-10	ASTM D7684*				
Ferrous Corrosive	Scale 0-10	ASTM D7684*				
Ferrous Other	Scale 0-10	ASTM D7684*				
Nonferrous Rubbing	Scale 0-10	ASTM D7684*				
Nonferrous Sliding	Scale 0-10	ASTM D7684*				
Nonferrous Cutting	Scale 0-10	ASTM D7684*				
Nonferrous Rolling	Scale 0-10	ASTM D7684*				
Nonferrous Other	Scale 0-10	ASTM D7684*				
Carbonaceous Material	Scale 0-10	ASTM D7684*				
Lubricant Degradation	Scale 0-10	ASTM D7684*				
Sand/Dirt	Scale 0-10	ASTM D7684*		1	1	
Fibres	Scale 0-10	ASTM D7684*				
Spheres	Scale 0-10	ASTM D7684*				
Other	Scale 0-10	ASTM D7684*		1	1	

## WEAR

All component wear rates are normal. The direct-reading & analytical ferrographic results are normal indicating no abnormal wear in the system.

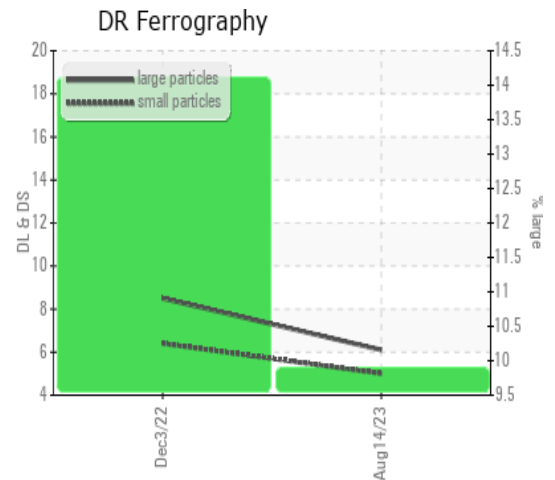

*This page left intentionally blank*