




OIL ANALYSIS REPORT

Sample Rating Trend

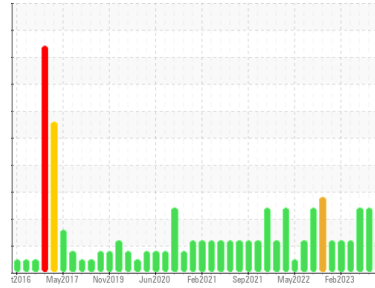

FUEL



Machine Id
NEW FLYER 0912

Component
Diesel Engine

Fluid
SAFETY-KLEEN PERFORMANCE PLUS XHD-7 15W40 (--- GAL)

DIAGNOSIS

Recommendation

We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Fluid Condition

Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | WC0830103 | WC0830316 | WC0791354 |
| Sample Date | Client Info | | 14 Aug 2023 | 05 Jul 2023 | 17 May 2023 |
| Machine Age | kms | Client Info | 296420 | 0 | 278937 |
| Oil Age | kms | Client Info | 0 | 0 | 0 |
| Oil Changed | Client Info | | N/A | N/A | N/A |
| Sample Status | | | ABNORMAL | SEVERE | SEVERE |

CONTAMINATION

| | method | limit/base | current | history1 | history2 |
|--------|-----------|------------|------------|----------|----------|
| Glycol | WC Method | | NEG | NEG | NEG |

WEAR METALS

| | method | limit/base | current | history1 | history2 | |
|-----------|--------|---------------|---------|--------------|----------|----|
| Iron | ppm | ASTM D5185(m) | >75 | 19 | 35 | 24 |
| Chromium | ppm | ASTM D5185(m) | >5 | <1 | 1 | <1 |
| Nickel | ppm | ASTM D5185(m) | >4 | 0 | 0 | 0 |
| Titanium | ppm | ASTM D5185(m) | >2 | 0 | 0 | <1 |
| Silver | ppm | ASTM D5185(m) | >2 | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185(m) | >15 | <1 | 2 | 2 |
| Lead | ppm | ASTM D5185(m) | >25 | <1 | 2 | <1 |
| Copper | ppm | ASTM D5185(m) | >100 | <1 | 1 | <1 |
| Tin | ppm | ASTM D5185(m) | >4 | 0 | <1 | <1 |
| Antimony | ppm | ASTM D5185(m) | | 0 | 0 | <1 |
| Vanadium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Beryllium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |

ADDITIVES

| | method | limit/base | current | history1 | history2 | |
|------------|--------|---------------|---------|--------------|----------|------|
| Boron | ppm | ASTM D5185(m) | | 1 | <1 | <1 |
| Barium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185(m) | | 53 | 52 | 56 |
| Manganese | ppm | ASTM D5185(m) | | <1 | <1 | <1 |
| Magnesium | ppm | ASTM D5185(m) | | 882 | 857 | 891 |
| Calcium | ppm | ASTM D5185(m) | | 936 | 954 | 1007 |
| Phosphorus | ppm | ASTM D5185(m) | | 959 | 950 | 1004 |
| Zinc | ppm | ASTM D5185(m) | | 1076 | 1070 | 1124 |
| Sulfur | ppm | ASTM D5185(m) | | 2291 | 2226 | 2430 |
| Lithium | ppm | ASTM D5185(m) | | <1 | <1 | <1 |

CONTAMINANTS

| | method | limit/base | current | history1 | history2 | |
|-----------|--------|---------------|---------|--------------|----------|-------|
| Silicon | ppm | ASTM D5185(m) | >25 | 3 | 4 | 3 |
| Sodium | ppm | ASTM D5185(m) | | 2 | 5 | 2 |
| Potassium | ppm | ASTM D5185(m) | >20 | 0 | <1 | 0 |
| Fuel | % | ASTM D7593* | >3.0 | ▲ 5.4 | ◆ 7.7 | ◆ 7.6 |

INFRA-RED



| | method | limit/base | current | history1 | history2 | |
|-----------|----------|-------------|---------|-------------|----------|------|
| Soot % | % | ASTM D7844* | >6 | 0.3 | 0.4 | 0.3 |
| Nitration | Abs/cm | ASTM D7624* | >20 | 8.1 | 10.1 | 8.7 |
| Sulfation | Abs/.1mm | ASTM D7415* | >30 | 22.4 | 25.0 | 21.4 |

FLUID DEGRADATION

| | method | limit/base | current | history1 | history2 | |
|-----------|----------|-------------|---------|-------------|----------|------|
| Oxidation | Abs/.1mm | ASTM D7414* | >25 | 20.1 | 26.7 | 20.5 |











OIL ANALYSIS REPORT

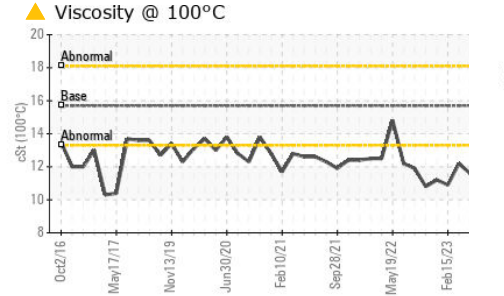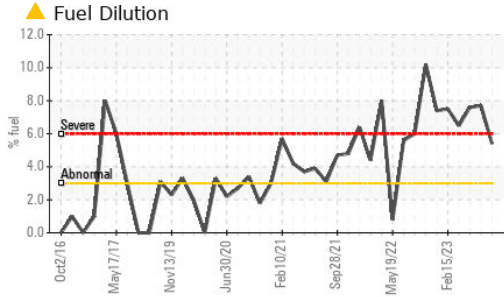

| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|------------|----------|
| Emulsified Water | scalar | Visual* | >0.2 | NEG | NEG |
| Free Water | scalar | Visual* | | NEG | NEG |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|---------------|---------|---------------|----------|
| Visc @ 100°C | cSt | ASTM D7279(m) | 15.7 | ▲ 12.2 | ▲ 11.0 |

GRAPHS

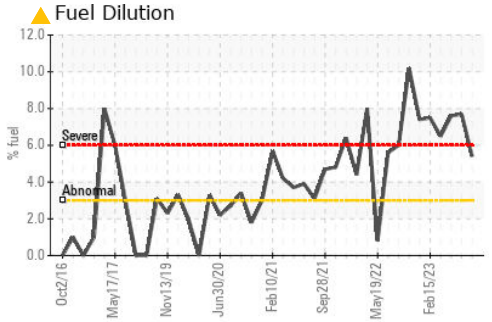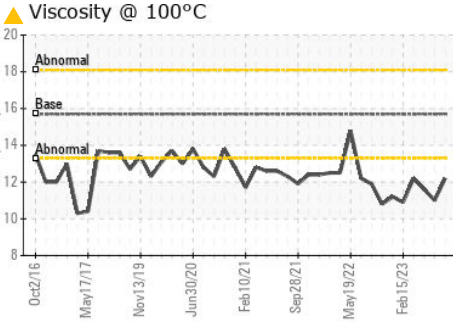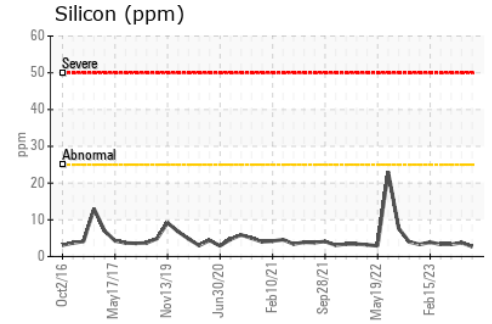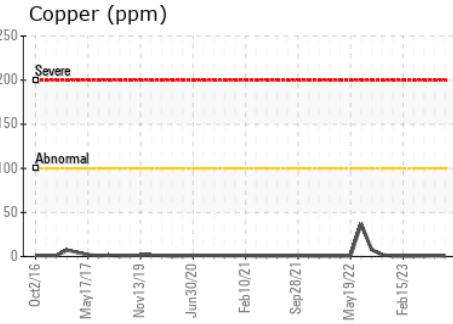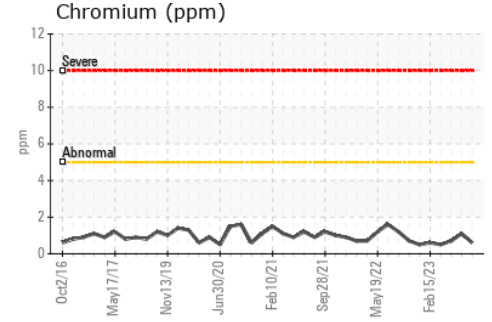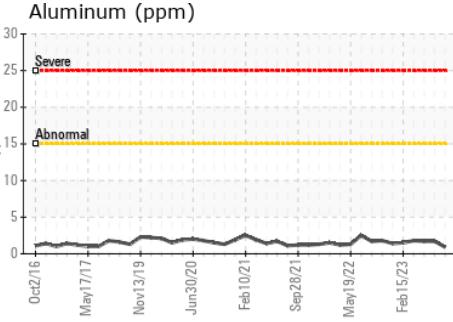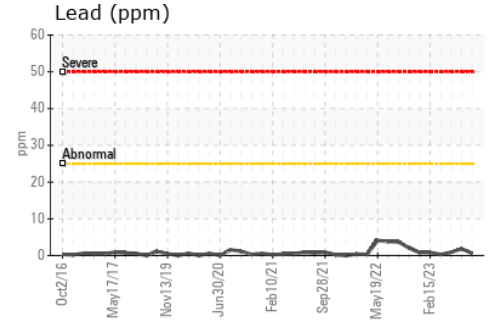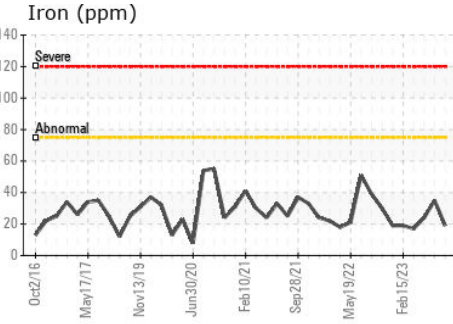

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0830103 **Received** : 16 Aug 2023
Lab Number : **02576113** **Diagnosed** : 17 Aug 2023
Unique Number : 5629173 **Diagnostician** : Wes Davis
Test Package : MOB 1 (Additional Tests: PercentFuel)

CITY OF HAMILTON
 2200 UPPER JAMES., MOUNTAIN TRANSIT STOREROOM
 MOUNT HOPE, ON
 CA L0R 1W0
 Contact: Jeff Parr
 jeff.parr@hamilton.ca
 T: (905)546-2424
 F: (905)679-4502

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.