

## **OIL ANALYSIS REPORT**

Sample Rating Trend







Machine Id UNIT #2 Component Hydraulic System Fluid SAE 5W30 (--- GAL)

#### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please note that this is a corrected copy for data entry updates.

#### Wear

All component wear rates are normal.

### Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.


#### Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PP		
Sample Date		Client Info		15 Aug 2023		
Machine Age	yrs	Client Info		0		
Oil Age	yrs	Client Info		0		
Oil Changed	,	Client Info		N/A		
Sample Status				NORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>20	<1		
Chromium	ppm	ASTM D5185(m)	>10	0		
Nickel	ppm	ASTM D5185(m)	>10	0		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)	>10	<1		
Lead	ppm	ASTM D5185(m)	>10	0		
Copper	ppm	ASTM D5185(m)	>75	0		
Tin	ppm	ASTM D5185(m)	>10	0		
Antimony	ppm	ASTM D5185(m)	-	0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
			mmbasc		history	This tory 2
Boron	ppm	ASTM D5185(m)		153		
Barium	ppm	ASTM D5185(m)		0		
Molybdenum	ppm	ASTM D5185(m)		63		
Manganese	ppm	ASTM D5185(m)		0		
Magnesium	ppm	ASTM D5185(m)		504		
Calcium	ppm	ASTM D5185(m)		865		
Phosphorus	ppm	ASTM D5185(m)		642		
Zinc	ppm	ASTM D5185(m)		681		
Sulfur	ppm	ASTM D5185(m)		2227		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)		4		
Sodium	ppm	ASTM D5185(m)		2		
Potassium	ppm	ASTM D5185(m)	>20	0		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	3877		
Particles >6µm		ASTM D7647	>1300	359		
Particles >14µm		ASTM D7647	>160	16		
Particles >21µm		ASTM D7647	>40	7		
Particles >38µm		ASTM D7647	>10	1		
Particles >71µm		ASTM D7647	>3	1		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	19/16/11		




# **OIL ANALYSIS REPORT**

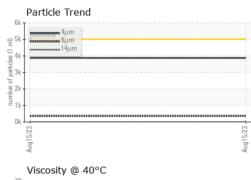







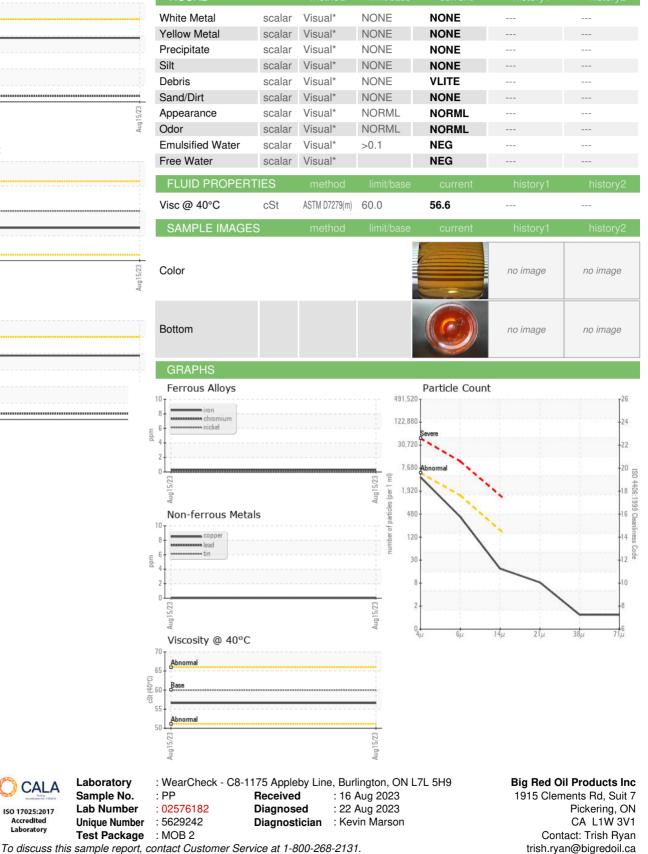

Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

5

Laboratory

Sample No.

Lab Number

Unique Number

CALA

ISO 17025:2017 Accredited Laboratory

ĥ