




OIL ANALYSIS REPORT

Sample Rating Trend

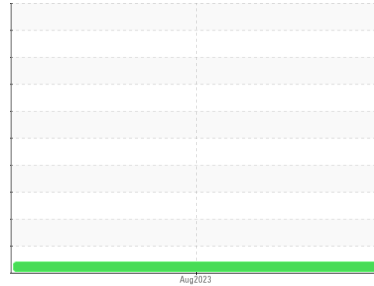

VISCOSITY



Machine Id
UNIT #4
 Component
Hydraulic System
 Fluid
SAE 5W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please note that this is a corrected copy for data entry updates.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition

Viscosity of sample indicates oil is within SAE 30 range, advise investigate. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PP	---	---
Sample Date	Client Info		15 Aug 2023	---	---
Machine Age	yrs Client Info		0	---	---
Oil Age	yrs Client Info		0	---	---
Oil Changed	Client Info		N/A	---	---
Sample Status			ABNORMAL	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm ASTM D5185(m)	>20	<1	---	---
Chromium	ppm ASTM D5185(m)	>10	0	---	---
Nickel	ppm ASTM D5185(m)	>10	<1	---	---
Titanium	ppm ASTM D5185(m)		0	---	---
Silver	ppm ASTM D5185(m)		0	---	---
Aluminum	ppm ASTM D5185(m)	>10	3	---	---
Lead	ppm ASTM D5185(m)	>10	0	---	---
Copper	ppm ASTM D5185(m)	>75	0	---	---
Tin	ppm ASTM D5185(m)	>10	0	---	---
Antimony	ppm ASTM D5185(m)		0	---	---
Vanadium	ppm ASTM D5185(m)		<1	---	---
Beryllium	ppm ASTM D5185(m)		0	---	---
Cadmium	ppm ASTM D5185(m)		0	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm ASTM D5185(m)		162	---	---
Barium	ppm ASTM D5185(m)		0	---	---
Molybdenum	ppm ASTM D5185(m)		34	---	---
Manganese	ppm ASTM D5185(m)		0	---	---
Magnesium	ppm ASTM D5185(m)		369	---	---
Calcium	ppm ASTM D5185(m)		1276	---	---
Phosphorus	ppm ASTM D5185(m)		667	---	---
Zinc	ppm ASTM D5185(m)		744	---	---
Sulfur	ppm ASTM D5185(m)		2586	---	---
Lithium	ppm ASTM D5185(m)		<1	---	---

CONTAMINANTS




	method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185(m)	>20	4	---	---
Sodium	ppm ASTM D5185(m)		2	---	---
Potassium	ppm ASTM D5185(m)	>20	2	---	---

FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	655	---	---
Particles >6µm	ASTM D7647	>1300	132	---	---
Particles >14µm	ASTM D7647	>160	24	---	---
Particles >21µm	ASTM D7647	>40	8	---	---
Particles >38µm	ASTM D7647	>10	1	---	---
Particles >71µm	ASTM D7647	>3	0	---	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	17/14/12	---	---



OIL ANALYSIS REPORT

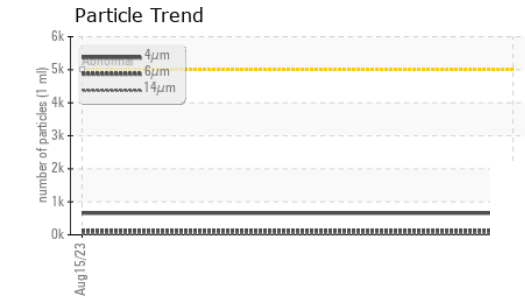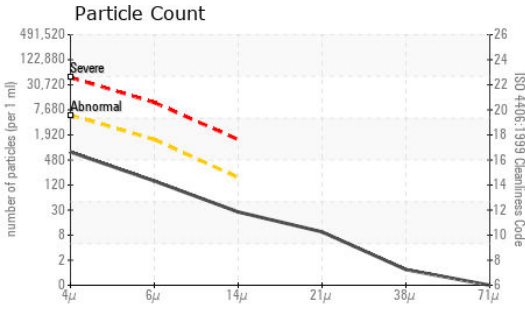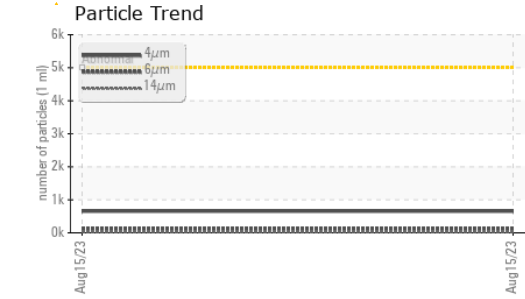





VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Precipitate	scalar	Visual*	NONE	NONE	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---	---
Free Water	scalar	Visual*		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	▲ 87.0	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color		no image	no image
Bottom		no image	no image

GRAPHS

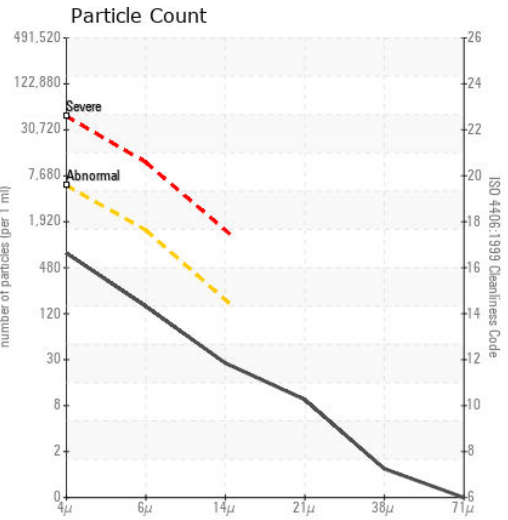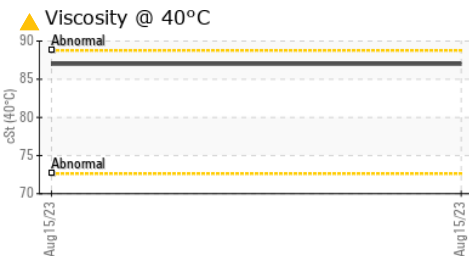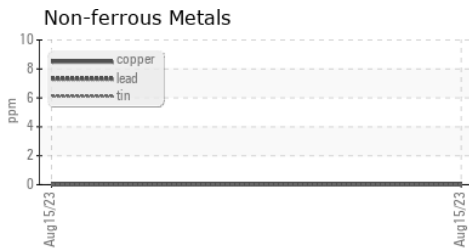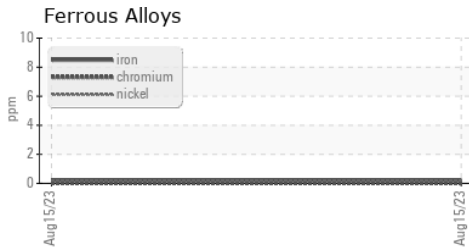

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PP **Received** : 16 Aug 2023
Lab Number : 02576184 **Diagnosed** : 22 Aug 2023
Unique Number : 5629244 **Diagnostician** : Kevin Marson
Test Package : MOB 2

Big Red Oil Products Inc
 1915 Clements Rd, Suit 7
 Pickering, ON
 CA L1W 3V1
 Contact: Trish Ryan
 trish.ryan@bigredoil.ca
 T: (905)420-0001
 F: (905)420-0111

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.