



# OIL ANALYSIS REPORT

Sample Rating Trend


**NORMAL**



Machine Id  
**EPIROC ST18 SCP203**

Component  
**Front Right Planetary**

Fluid  
**PENNZOIL 75W140 (--- GAL)**

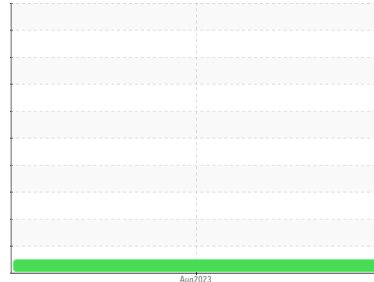

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0848082</b>	---	---
Sample Date	Client Info		<b>11 Aug 2023</b>	---	---
Machine Age	hrs	Client Info	<b>10010</b>	---	---
Oil Age	hrs	Client Info	<b>1000</b>	---	---
Oil Changed	Client Info		<b>Changed</b>	---	---
Sample Status			<b>NORMAL</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>500	<b>464</b>	---
Chromium	ppm	ASTM D5185(m)	>10	<b>2</b>	---
Nickel	ppm	ASTM D5185(m)	>10	<b>1</b>	---
Titanium	ppm	ASTM D5185(m)		<b>&lt;1</b>	---
Silver	ppm	ASTM D5185(m)		<b>0</b>	---
Aluminum	ppm	ASTM D5185(m)	>25	<b>2</b>	---
Lead	ppm	ASTM D5185(m)	>25	<b>2</b>	---
Copper	ppm	ASTM D5185(m)	>75	<b>66</b>	---
Tin	ppm	ASTM D5185(m)	>10	<b>3</b>	---
Antimony	ppm	ASTM D5185(m)	>5	<b>0</b>	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	---
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	---
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<b>18</b>	---
Barium	ppm	ASTM D5185(m)		<b>2</b>	---
Molybdenum	ppm	ASTM D5185(m)		<b>10</b>	---
Manganese	ppm	ASTM D5185(m)		<b>8</b>	---
Magnesium	ppm	ASTM D5185(m)		<b>2</b>	---
Calcium	ppm	ASTM D5185(m)		<b>224</b>	---
Phosphorus	ppm	ASTM D5185(m)		<b>2748</b>	---
Zinc	ppm	ASTM D5185(m)		<b>60</b>	---
Sulfur	ppm	ASTM D5185(m)		<b>23843</b>	---
Lithium	ppm	ASTM D5185(m)		<b>1</b>	---

## CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>75	<b>14</b>	---
Sodium	ppm	ASTM D5185(m)		<b>6</b>	---
Potassium	ppm	ASTM D5185(m)	>20	<b>2</b>	---

## VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	<b>NONE</b>	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	---
Precipitate	scalar	Visual*	NONE	<b>NONE</b>	---
Silt	scalar	Visual*	NONE	<b>NONE</b>	---
Debris	scalar	Visual*	NONE	<b>VLITE</b>	---
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	---
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	---
Free Water	scalar	Visual*		<b>NEG</b>	---











# OIL ANALYSIS REPORT

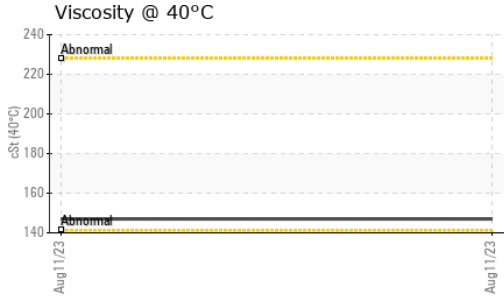

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	<b>147</b>	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

## GRAPHS

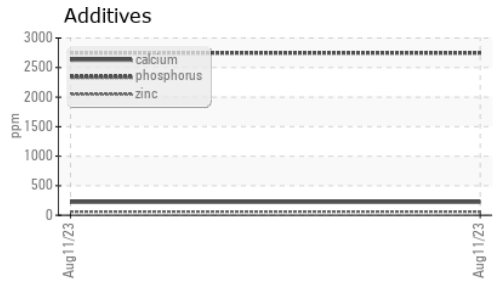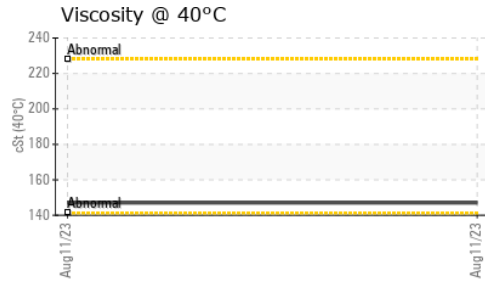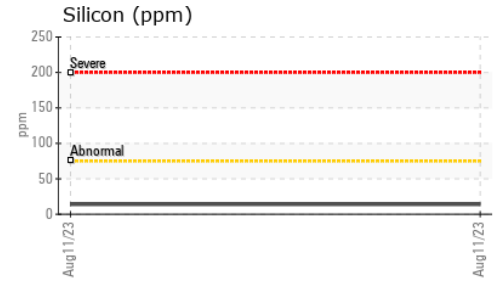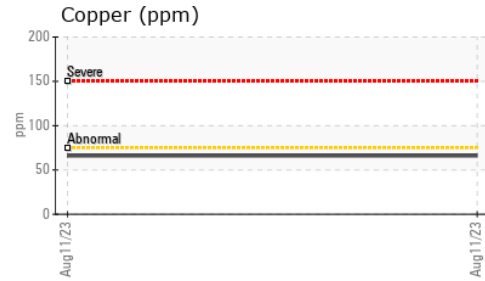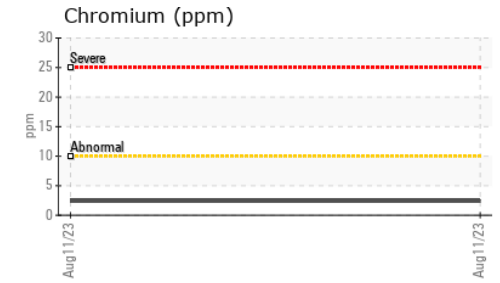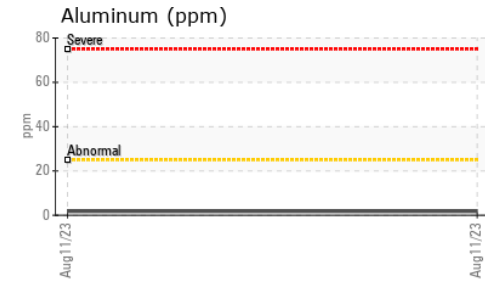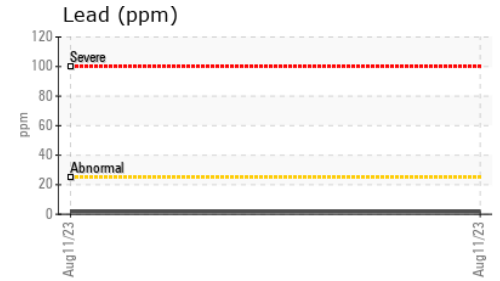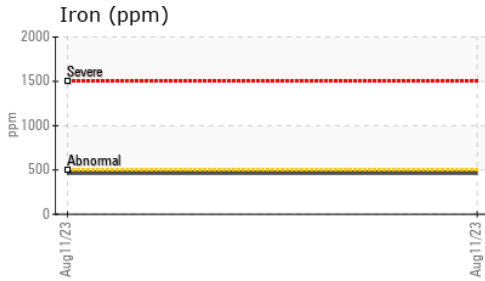

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0848082      **Received** : 16 Aug 2023  
**Lab Number** : 02576209      **Diagnosed** : 16 Aug 2023  
**Unique Number** : 5629269      **Diagnostician** : Wes Davis  
**Test Package** : MOB 1

**Agnico Eagle Canada**  
 1350 Government Rd. W, MACASSA COMPLEX  
 Kirkland Lake, ON  
 CA P2N 3J1  
 Contact: Mitch Lamontagne  
 AEM\_KL\_macassaoilsampleresults@agnicoeagle.com  
 T: (705)567-5208  
 F: (705)567-5221

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.