


OIL ANALYSIS REPORT

Sample Rating Trend







TURRET A

Component

Gearbox

GEAR OIL ISO 220 (--- GAL)

DIAGNOSIS

Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC)

GEAR OIL ISO 220. Please confirm. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

			May2023	Aug2023		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0782507	WC0782504	
Sample Date		Client Info		15 Aug 2023	25 May 2023	
Machine Age	hrs	Client Info		0	0	
Oil Age	hrs	Client Info		0	0	
Oil Changed		Client Info		N/A	N/A	
Sample Status				NORMAL	NORMAL	
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184*	>DFLT	18	56	
Iron	ppm	ASTM D5185(m)	>200	109	163	
Chromium	ppm	ASTM D5185(m)	>15	<1	<1	
Nickel	ppm	ASTM D5185(m)	>15	<1	<1	
Titanium	ppm	ASTM D5185(m)		<1	<1	
Silver	ppm	ASTM D5185(m)		0	0	
Aluminum	ppm	ASTM D5185(m)	>25	<1	<1	
Lead	ppm	ASTM D5185(m)	>100	1	2	
Copper	ppm	ASTM D5185(m)	>200	4	4	
Tin	ppm	ASTM D5185(m)	>25	0	0	
Antimony	ppm	ASTM D5185(m)	>5	0	<1	
Vanadium	ppm	ASTM D5185(m)		0	0	
Beryllium	ppm	ASTM D5185(m)		0	0	
Cadmium	ppm	ASTM D5185(m)		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	50	1	<1	
Barium	ppm	ASTM D5185(m)	15	<1	<1	
Molybdenum	ppm	ASTM D5185(m)	15	0	0	
Manganese	ppm	ASTM D5185(m)		1	2	
Magnesium	ppm	ASTM D5185(m)	50	1	<1	
Calcium	ppm	ASTM D5185(m)	50	6	6	
Phosphorus	ppm	ASTM D5185(m)	350	286	295	
Zinc	ppm	ASTM D5185(m)	100	6	5	
Sulfur	ppm	ASTM D5185(m)	12500	9969	10127	
Lithium	ppm	ASTM D5185(m)		<1	<1	
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>50	8	10	
Sodium	ppm	ASTM D5185(m)		<1	1	
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	
FLUID DEGRADA	TION	method	limit/base	current	history1	history2

0.45


Acid Number (AN)

mg KOH/g ASTM D974* 0.85

0.59



OIL ANALYSIS REPORT

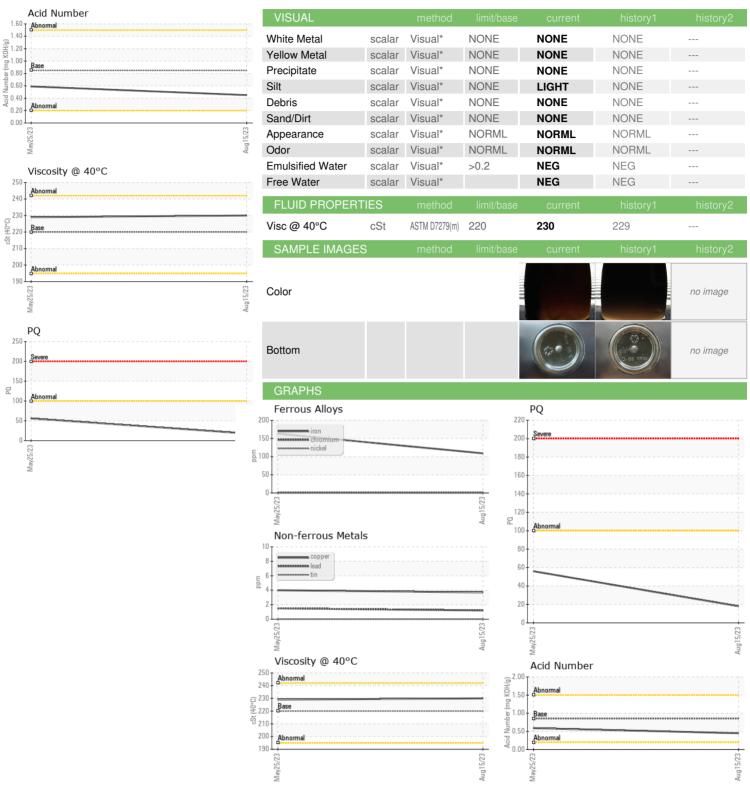



CALA ISO 17025:2017 Accredited Laboratory

Laboratory Sample No. Lab Number **Unique Number**

: WC0782507

: 02576239 : 5629299 Test Package : IND 2

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 STELCO - BOSC - Basic Oxygen Slab Caster Received Diagnosed

Diagnostician

: 16 Aug 2023 : 17 Aug 2023 : Wes Davis

2330 Regional Road #3, Door: BOSC8 NANTICOKE, ON

CA NOA 1L0 Contact: Kevin Beeton Kevin.Beeton@stelco.com

To discuss this sample report, contact Customer Service at 1-800-268-2131. Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

Contact/Location: Kevin Beeton - LEWBOSC

F: (519)587-7702

T: