

OIL ANALYSIS REPORT

Sample Rating Trend



TURRET D

Component Gearbox Fluid GEAR OIL (PAO) ISO 220 (--- GAL)

DIAGNOSIS

Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) GEAR OIL (PAO) ISO 220. Please confirm. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.


Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

			May2023	Aug2023		
SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0782508	WC0782505	
Sample Date		Client Info		15 Aug 2023	29 May 2023	
Machine Age	hrs	Client Info		0	0	
Oil Age	hrs	Client Info		0	0	
Oil Changed		Client Info		N/A	N/A	
Sample Status				NORMAL	NORMAL	
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184*	>DFLT	12	19	
Iron	ppm	ASTM D5185(m)	>200	44	58	
Chromium	ppm	ASTM D5185(m)	>15	<1	0	
Nickel	ppm	ASTM D5185(m)	>15	<1	0	
Titanium	ppm	ASTM D5185(m)		<1	1	
Silver	ppm	ASTM D5185(m)		0	0	
Aluminum	ppm	ASTM D5185(m)	>25	1	1	
Lead	ppm	ASTM D5185(m)	>100	0	0	
Copper	ppm	ASTM D5185(m)	>200	2	2	
Tin	ppm	ASTM D5185(m)	>25	0	0	
Antimony	ppm	ASTM D5185(m)	>5	0	0	
Vanadium	ppm	ASTM D5185(m)		0	0	
Beryllium	ppm	ASTM D5185(m)		0	0	
Cadmium	ppm	ASTM D5185(m)		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	25	<1	<1	
Barium	ppm	ASTM D5185(m)	12	<1	<1	
Molybdenum	ppm	ASTM D5185(m)	5	0	0	
Manganese	ppm	ASTM D5185(m)		<1	1	
Magnesium	ppm	ASTM D5185(m)	25	2	1	
Calcium	ppm	ASTM D5185(m)	25	6	4	
Phosphorus	ppm	ASTM D5185(m)	375	309	328	
Zinc	ppm	ASTM D5185(m)	25	5	3	
Sulfur	ppm	ASTM D5185(m)	4900	6197	6476	
Lithium	ppm	ASTM D5185(m)		<1	<1	
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>50	4	5	
Sodium	ppm	ASTM D5185(m)		<1	<1	
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	
FLUID DEGRADA		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	1.10	0.38	0.45	



OIL ANALYSIS REPORT

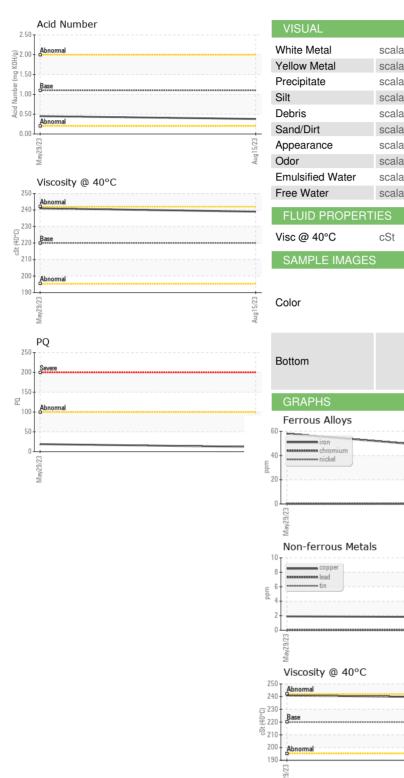

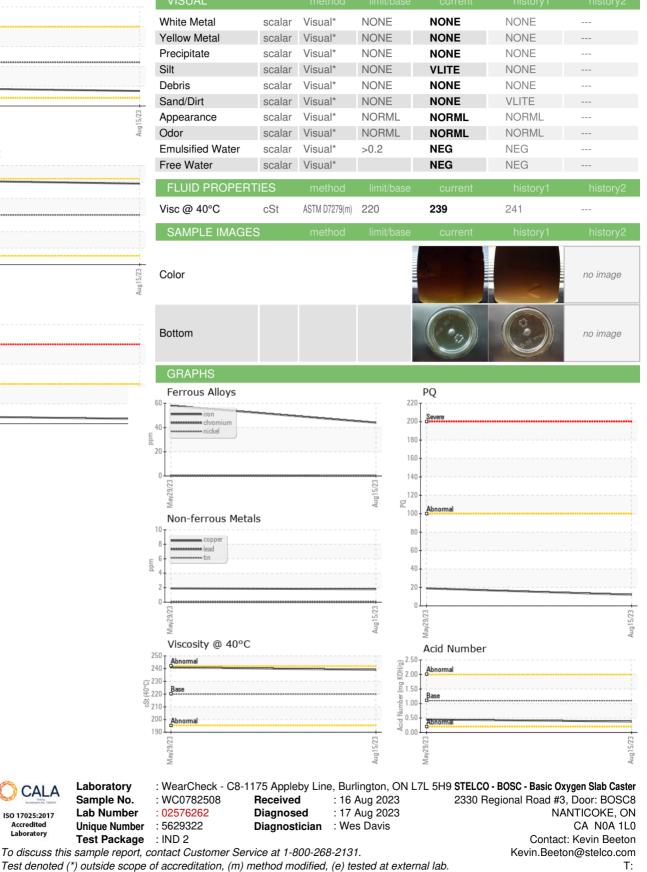

Report Id: LEWBOSC [WCAMIS] 02576262 (Generated: 08/17/2023 08:59:24) Rev: 1

Validity of results and interpretation are based on the sample and information as supplied.

CALA

ISO 17025:2017 Accredited

Laboratory

Contact/Location: Kevin Beeton - LEWBOSC

F: (519)587-7702