




PROBLEM SUMMARY

Sample Rating Trend

ISO




Area
Caster/Hydraulics
 Machine Id
D - Strand 2-1 Hydraulic Tank
 Component
Hydraulic System
 Fluid
FORSYTHE NO FIRE WG 200R (5000 LTR)

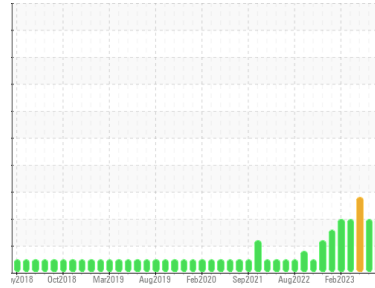

COMPONENT CONDITION SUMMARY

▲ Particle Trend

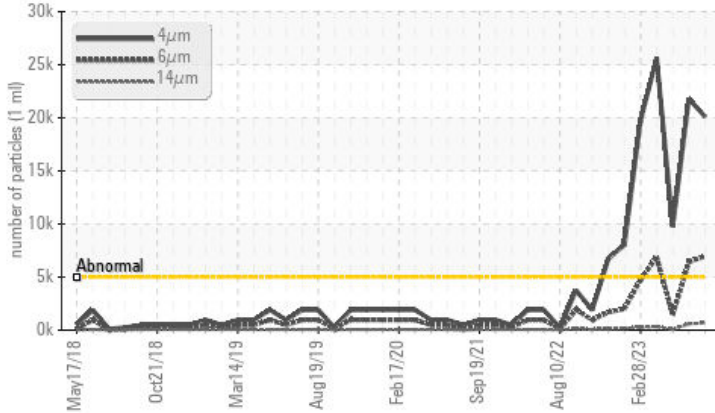

RECOMMENDATION

We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status			ABNORMAL	ABNORMAL	ATTENTION
Particles >4µm	ASTM D7647	>5000	▲ 20105	▲ 21775	▲ 9760
Particles >6µm	ASTM D7647	>1300	▲ 6945	▲ 6424	▲ 1431
Particles >14µm	ASTM D7647	>160	▲ 669	▲ 597	60
Particles >21µm	ASTM D7647	>40	▲ 149	▲ 166	15
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ 22/20/17	▲ 22/20/16	▲ 20/18/13

Customer Id: LEWBOSC
 Sample No.: WC0850100
 Lab Number: 02576286
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Kevin Marson +1 (289)291-4644 x4644
Kevin.Marson@wearcheck.com

To change component or sample information:
 Gloria Gonzalez +1 (289)291-4643 x4643
gloria.gonzalez@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Filter	---	---	?	We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Filter Fluid	---	---	?	We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid.

HISTORICAL DIAGNOSIS

13 Jul 2023 Diag: Kevin Marson

ISO



We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. We recommend an early resample to monitor this condition. All component wear rates are normal. There is a moderate amount of particulates (2 to 100 microns in size) present in the oil. The AN level is acceptable for this fluid. The pH level of this fluid is within the acceptable limits. The reserve alkalinity of this fluid is acceptable. The water concentration level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

view report



20 Jun 2023 Diag: Kevin Marson

COOL CHEMICALS



We recommend you service the filters on this component. Confirm the source of the lubricant being utilized for top-up/fill. Resample at the next service interval to monitor. All component wear rates are normal. There is a light amount of silt (particulates < 14 microns in size) present in the oil. Additive levels indicate the addition of a different brand, or type of oil. The AN level is acceptable for this fluid. The pH level of this fluid is within the acceptable limits. The reserve alkalinity of this fluid is acceptable. The water concentration level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



30 May 2023 Diag: Kevin Marson

ISO



We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. We recommend an early resample to monitor this condition. All component wear rates are normal. There is a moderate amount of particulates (2 to 100 microns in size) present in the oil. The AN level is acceptable for this fluid. The pH level of this fluid is within the acceptable limits. The reserve alkalinity of this fluid is acceptable. The water concentration level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.


view report





COOLANT REPORT

Sample Rating Trend

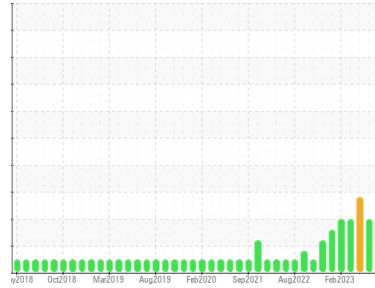

ISO



Area
Caster/Hydraulics
 Machine Id
D - Strand 2-1 Hydraulic Tank
 Component
Hydraulic System
 Fluid
FORSYTHE NO FIRE WG 200R (5000 LTR)

DIAGNOSIS

Recommendation

We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of particulates (2 to 100 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The pH level of this fluid is within the acceptable limits. The reserve alkalinity of this fluid is acceptable. The water concentration level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0850100	WC0838954	WC0832560
Sample Date	Client Info		16 Aug 2023	13 Jul 2023	20 Jun 2023
Machine Age	hrs	Client Info	0	0	0
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			ABNORMAL	ABNORMAL	ATTENTION

CORROSION INHIBITORS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	0	<1	0
Phosphorus	ppm	ASTM D5185(m)	0	0	<1
Boron	ppm	ASTM D5185(m)	0	2	2
Molybdenum	ppm	ASTM D5185(m)	0	1	2

CORROSION

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>20	0	<1
Aluminum	ppm	ASTM D5185(m)	>20	0	0
Copper	ppm	ASTM D5185(m)	>20	0	1
Lead	ppm	ASTM D5185(m)	>20	0	0
Tin	ppm	ASTM D5185(m)	>20	0	0
Silver	ppm	ASTM D5185(m)	>20	0	0
Zinc	ppm	ASTM D5185(m)	>20	0	0

CONTAMINANTS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	▲ 20105	▲ 21775	▲ 9760
Particles >6µm	ASTM D7647	>1300	▲ 6945	▲ 6424	▲ 1431
Particles >14µm	ASTM D7647	>160	▲ 669	▲ 597	60
Particles >21µm	ASTM D7647	>40	▲ 149	▲ 166	15
Particles >38µm	ASTM D7647	>10	2	9	0
Particles >71µm	ASTM D7647	>3	0	0	0
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ 22/20/17	▲ 22/20/16	▲ 20/18/13

CARRIER SALTS

	method	limit/base	current	history1	history2
Sodium	ppm	ASTM D5185(m)	158	88	173
Potassium	ppm	ASTM D5185(m)	0	0	▲ 0


SCALE POTENTIAL

	method	limit/base	current	history1	history2
Calcium	ppm	ASTM D5185(m)	2	1	0
Magnesium	ppm	ASTM D5185(m)	<1	1	<1




COOLANT REPORT

Particle Trend

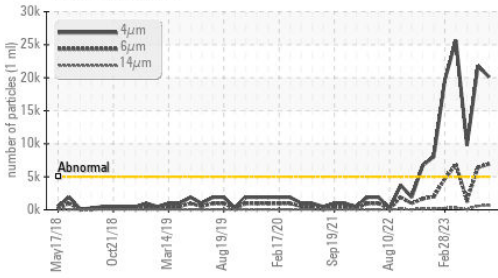


VISUAL	method	limit/base	current	history1	history2
Color					
Bottom					

Water

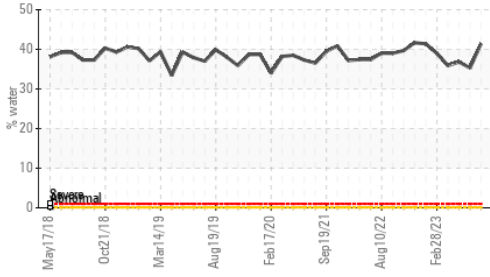


GRAPHS


Ferrous Alloys

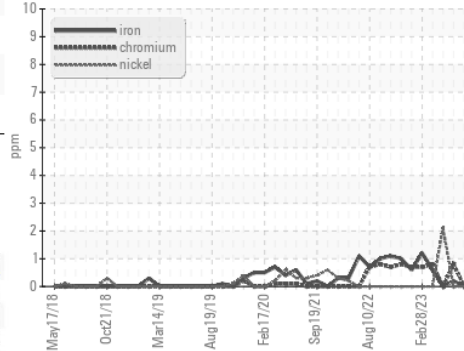


Particle Count

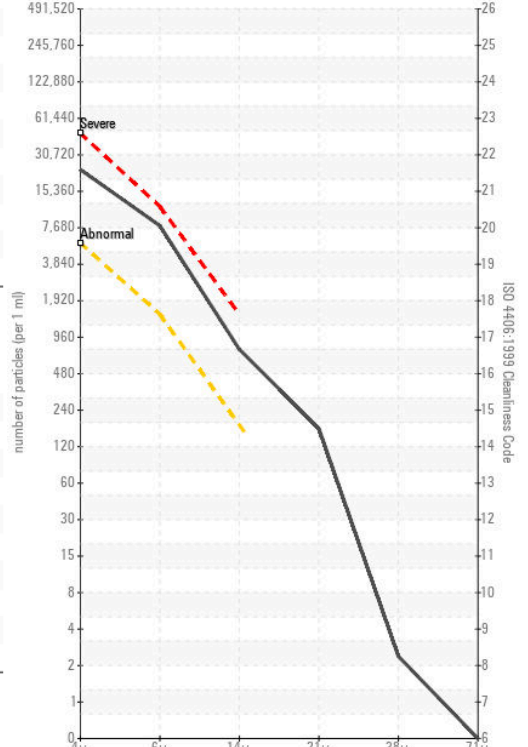


Reserve Alkalinity

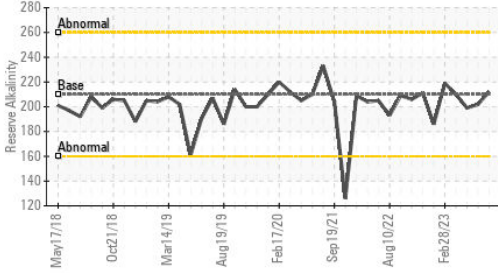


Non-ferrous Metals

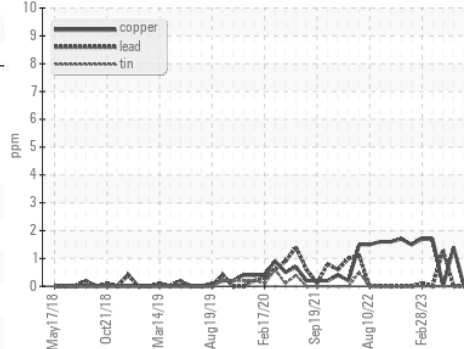


PQ

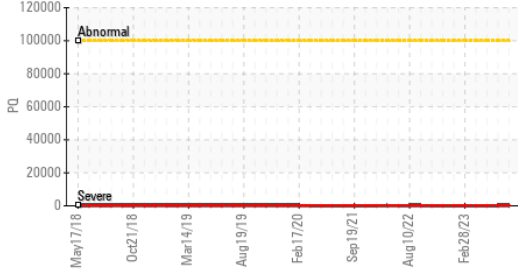


Viscosity @ 40°C

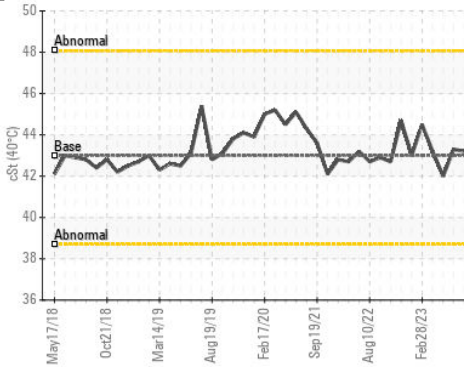

Acid Number

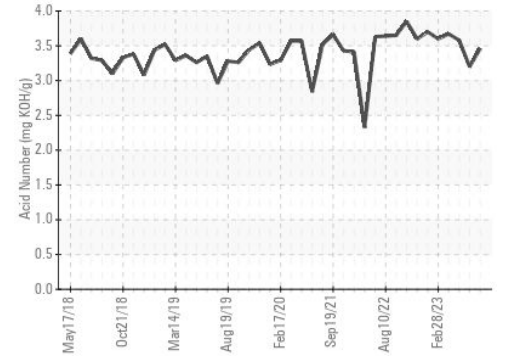

Reserve Alkalinity

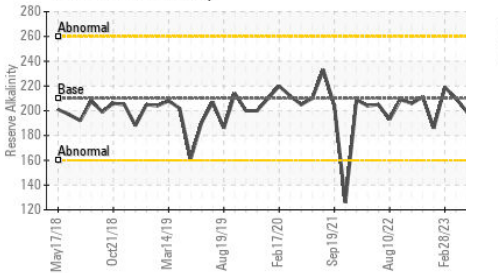

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **STELCO - BOSC - Basic Oxygen Slab Caster**
Sample No. : WC0850100 **Received** : 16 Aug 2023
Lab Number : 02576286 **Diagnosed** : 21 Aug 2023
Unique Number : 5629346 **Diagnostician** : Kevin Marson
Test Package : IND 2 (Additional Tests: KF, pH, PQ, ReserveAlk, TAN Man)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

2330 Regional Road #3, Door: BOSC8
 NANTICOKE, ON
 CA N0A 1L0
 Contact: Tom Walden
 Thomas.Walden@stelco.com
 T: (519)587-4541
 F: (519)587-7702