

OIL ANALYSIS REPORT

GFL 122 Arrow Road - C13100

AG186

Component **Hydraulic System**

NOT GIVEN (--- GAL)

Sample Rating Trend



Recommendation

This is a baseline read-out on the submitted sample. (Customer Sample Comment: IND2-ICP KV AN KF)

{not applicable}

Contamination

{not applicable}


Fluid Condition

{not applicable}

| SAMPLE INFORM | MATION | method | limit/base | current | history1 | history2 |
|-----------------|--------|---------------|------------|-------------|----------|----------|
| Sample Number | | Client Info | | E30000101 | | |
| Sample Date | | Client Info | | 03 Aug 2023 | | |
| Machine Age | hrs | Client Info | | 0 | | |
| Oil Age | hrs | Client Info | | 0 | | |
| Oil Changed | | Client Info | | Not Changd | | |
| Sample Status | | | | NORMAL | | |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185(m) | >20 | 4 | | |
| Chromium | ppm | ASTM D5185(m) | >20 | 0 | | |
| Nickel | ppm | ASTM D5185(m) | >20 | 0 | | |
| Titanium | ppm | ASTM D5185(m) | | 0 | | |
| Silver | ppm | ASTM D5185(m) | | 0 | | |
| Aluminum | ppm | ASTM D5185(m) | >20 | <1 | | |
| Lead | ppm | ASTM D5185(m) | >20 | <1 | | |
| Copper | ppm | ASTM D5185(m) | >20 | 4 | | |
| Tin | ppm | ASTM D5185(m) | >20 | 0 | | |
| Antimony | ppm | ASTM D5185(m) | | 0 | | |
| Vanadium | ppm | ASTM D5185(m) | | 0 | | |
| Beryllium | ppm | ASTM D5185(m) | | 0 | | |
| Cadmium | ppm | ASTM D5185(m) | | 0 | | |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185(m) | | <1 | | |
| Barium | ppm | ASTM D5185(m) | | 0 | | |
| Molybdenum | ppm | ASTM D5185(m) | | 0 | | |
| Manganese | ppm | ASTM D5185(m) | | 0 | | |
| Magnesium | ppm | ASTM D5185(m) | | <1 | | |
| Calcium | ppm | ASTM D5185(m) | | 43 | | |
| Phosphorus | ppm | ASTM D5185(m) | | 366 | | |
| Zinc | ppm | ASTM D5185(m) | | 402 | | |
| Sulfur | ppm | ASTM D5185(m) | | 5101 | | |
| Lithium | ppm | ASTM D5185(m) | | <1 | | |
| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
| Silicon | ppm | ASTM D5185(m) | >15 | <1 | | |
| Sodium | ppm | ASTM D5185(m) | | <1 | | |
| Potassium | ppm | ASTM D5185(m) | >20 | <1 | | |
| Water | % | ASTM D6304* | >0.05 | 0.006 | | |
| ppm Water | ppm | ASTM D6304* | >500 | 65.7 | | |
| FLUID CLEANLIN | IESS | method | limit/base | current | history1 | history2 |
| Particles >4µm | | ASTM D7647 | >5000 | 4611 | | |
| Particles >6µm | | ASTM D7647 | >1300 | 499 | | |
| Particles >14μm | | ASTM D7647 | >160 | 10 | | |
| Particles >21µm | | ASTM D7647 | >40 | 3 | | |
| Particles >38μm | | ASTM D7647 | >10 | 0 | | |
| Particles >71μm | | ASTM D7647 | >3 | 0 | | |
| Oil Cleanliness | | ISO 4406 (c) | >19/17/14 | 19/16/10 | | |



OIL ANALYSIS REPORT

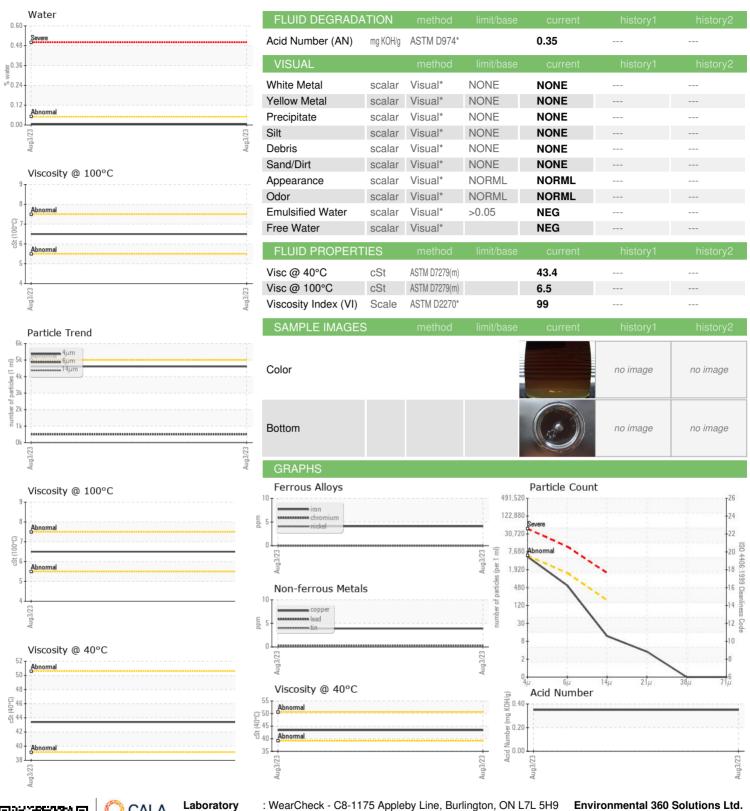



CALA ISO 17025:2017 Accredited

Laboratory

Laboratory Sample No. Lab Number **Unique Number**

: E30000101

Received : 02576551 Diagnosed Diagnostician : Tatiana Sorkina : 5629611

: 17 Aug 2023

: 22 Aug 2023

Test Package : IND 2 (Additional Tests: KF, KV100, VI) To discuss this sample report, contact Customer Service at 1-800-268-2131.

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

Environmental 360 Solutions Ltd.

640 Victoria Street Cobourg, ON **CA K9A 5H5** Contact: Fred Kosseim fkosseim@e360s.ca T: (905)372-2251

F: (905)372-1658