


## **OIL ANALYSIS REPORT**

#### Sample Rating Trend







# QC230213IND2

Component

Hydraulic System

AW HYDRAULIC OIL ISO 68 (--- GAL)

### DIAGNOSIS

#### Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

#### Wear

All component wear rates are normal.

#### Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The water content is negligible. The system and fluid cleanliness is acceptable.


#### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

n2023 Jun2023 Jul2023 Jul2023 Jul2023 Jul2023 Aug2023 Aug2023									
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2			
Sample Number		Client Info		WC0841381	WC0841380	WC0841379			
Sample Date		Client Info		18 Aug 2023	17 Aug 2023	16 Aug 2023			
Machine Age	hrs	Client Info		0	0	0			
Oil Age	hrs	Client Info		0	0	0			
Oil Changed		Client Info		N/A	N/A	N/A			
Sample Status				NORMAL	NORMAL	NORMAL			
WEAR METALS		method	limit/base	current	history1	history2			
Iron	ppm	ASTM D5185(m)	>20	0	0	0			
Chromium	ppm	ASTM D5185(m)	>20	0	0	0			
Nickel	ppm	ASTM D5185(m)	>20	0	0	<1			
Titanium	ppm	ASTM D5185(m)		0	0	0			
Silver	ppm	ASTM D5185(m)		0	0	0			
Aluminum	ppm	ASTM D5185(m)	>20	0	<1	<1			
Lead	ppm	ASTM D5185(m)	>20	<1	0	0			
Copper	ppm	ASTM D5185(m)	>20	<1	<1	0			
Tin	ppm	ASTM D5185(m)	>20	0	0	<1			
Antimony	ppm	ASTM D5185(m)		<1	0	0			
Vanadium	ppm	ASTM D5185(m)		0	0	0			
Beryllium	ppm	ASTM D5185(m)		0	0	0			
Cadmium	ppm	ASTM D5185(m)		0	0	0			
ADDITIVES		method	limit/base	current	history1	history2			
Boron	ppm	ASTM D5185(m)	5	0	<1	<1			
Barium	ppm	ASTM D5185(m)	5	0	0	0			
Molybdenum	ppm	ASTM D5185(m)	5	0	0	0			
Manganese	ppm	ASTM D5185(m)		0	0	0			
Magnesium	ppm	ASTM D5185(m)	25	<1	<1	<1			
Calcium	ppm	ASTM D5185(m)	200	43	43	43			
Phosphorus	ppm	ASTM D5185(m)	300	362	357	358			
Zinc	ppm	ASTM D5185(m)	370	423	422	428			
Sulfur	ppm	ASTM D5185(m)	2500	704	710	695			
Lithium	ppm	ASTM D5185(m)		<1	<1	<1			
CONTAMINANTS	;	method	limit/base	current	history1	history2			
Silicon	ppm	ASTM D5185(m)	>15	0	0	0			
Sodium	ppm	ASTM D5185(m)		0	0	0			
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	<1			
Water	%	ASTM D6304*	>0.05	0.002	0.002	0.002			
ppm Water	ppm	ASTM D6304*	>500	22.0	18.6	16.8			
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2			
Particles >4µm		ASTM D7647	>5000	148	89	48			
Particles >4µm Particles >6µm		ASTM D7647 ASTM D7647	>5000 >1300	148 34	89 24	48 12			
Particles >6µm		ASTM D7647	>1300	34	24	12			
Particles >6μm Particles >14μm		ASTM D7647 ASTM D7647	>1300 >160	34 4	24 5	12 5			
Particles >6μm Particles >14μm Particles >21μm		ASTM D7647 ASTM D7647 ASTM D7647	>1300 >160 >40	34 4 1	24 5 2	12 5 3			



## **OIL ANALYSIS REPORT**

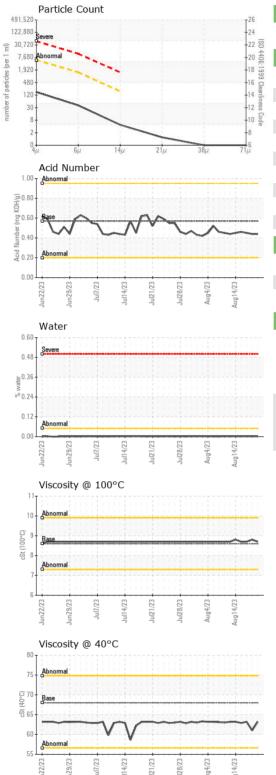

FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	0.57	0.44	0.44	0.45
VISUAL		method				history2
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
<b>Emulsified Water</b>	scalar	Visual*	>0.05	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	68	63.2	61.0	63.2
Visc @ 100°C	cSt	ASTM D7279(m)	8.6	8.7	8.8	8.7
Viscosity Index (VI)	Scale	ASTM D2270*	96	110	118	110
SAMPLE IMAGES m		method	limit/base	current	history1	history2
Color					300N	
00.0.						
Bottom						



CALA ISO 17025:2017 Accredited

Laboratory Sample No. Lab Number **Unique Number** 

: WC0841381

Validity of results and interpretation are based on the sample and information as supplied.

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 WearCheck Quality Control Sample Results Received : 18 Aug 2023 : 02576740 Diagnosed : 22 Aug 2023

: 5629800 Diagnostician : Wes Davis Test Package : IND 2 (Additional Tests: KF, KV100, TAN Man, VI)

To discuss this sample report, contact Customer Service at 1-800-268-2131. Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

Contact: Dorian Anderson dorian.anderson@wearcheck.com

T: (289)291-4652 F: (905)569-8605

Burlington, ON

CA