


OIL ANALYSIS REPORT

)**T**



NORMAL



Machine Id

Component **Hydraulic System**

MONARCH PREMIUM HYDRAULIC OIL AW R&O 46 (--- GAL

2., 10...100.0

Recommendation Resample at the next service interval to monitor. NOTE: Please provide information regarding

reservoir capacity, filter type and micron rating with next sample.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

R&O 46 (GA	.1.\					
`			Aug ² 023			
SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0813142		
Sample Date		Client Info		15 Aug 2023		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
WEAR METALS		method	limit/base	current	history1	history2
ron	ppm	ASTM D5185(m)	>20	<1		
Chromium	ppm	ASTM D5185(m)	>20	0		
Nickel	ppm	ASTM D5185(m)	>20	0		
- itanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)	>20	0		
ead	ppm	ASTM D5185(m)	>20	0		
Copper	ppm	ASTM D5185(m)	>20	<1		
-in	ppm	ASTM D5185(m)	>20	0		
Antimony	ppm	ASTM D5185(m)		0		
/anadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<1		
Barium	ppm	ASTM D5185(m)		0		
Molybdenum	ppm	ASTM D5185(m)		<1		
Manganese	ppm	ASTM D5185(m)		0		
/lagnesium	ppm	ASTM D5185(m)		2		
Calcium	ppm	ASTM D5185(m)		73		
Phosphorus	ppm	ASTM D5185(m)		397		
Zinc	ppm	ASTM D5185(m)		485		
Sulfur	ppm	ASTM D5185(m)		2056		
ithium	ppm	ASTM D5185(m)		<1		
CONTAMINANTS	S	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>15	<1		
Sodium	ppm	ASTM D5185(m)		<1		
Potassium	ppm	ASTM D5185(m)	>20	0		
FLUID CLEANLIN	NESS _	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	2279		
Particles >6µm		ASTM D7647	>1300	624		
Particles >14µm		ASTM D7647	>160	36		
Particles >21µm		ASTM D7647	>40	8		
Particles >38µm		ASTM D7647	>10	1		
Particles >71µm		ASTM D7647		0		
Dil Cleanliness		ISO 4406 (c)	>19/17/14	18/16/12		
FLUID DEGRADA	ATION _	method	limit/base	current	history1	history2



OIL ANALYSIS REPORT

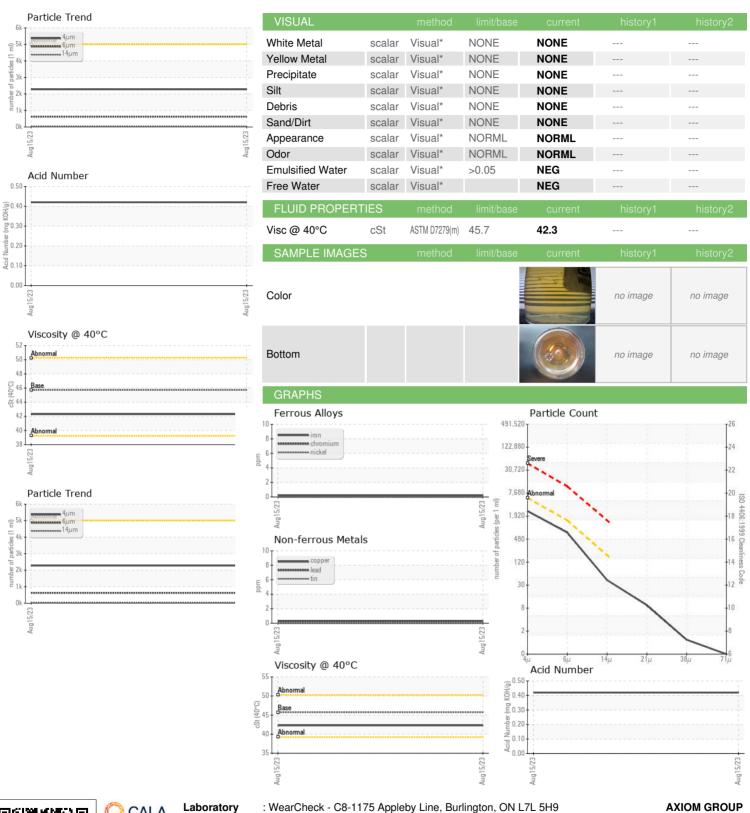



CALA ISO 17025:2017 Accredited Laboratory

Laboratory Sample No. Lab Number Unique Number Test Package

: IND 2

: WC0813142 : 02576764 : 5629824

Received Diagnosed Diagnostician

: 18 Aug 2023 : 22 Aug 2023 : Wes Davis

AXIOM GROUP 115 MARY ST AURORA, ON CA L4G 1G3 Contact: Pawel Perec

To discuss this sample report, contact Customer Service at 1-800-268-2131.

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

T:

F: