




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

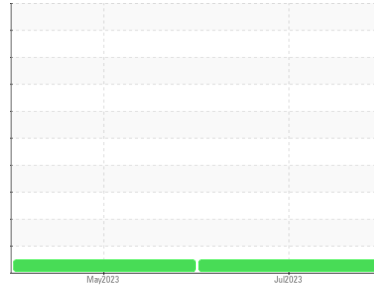

Machine Id  
**BLOWER #6 (S/N 5979)**

Component  
**Blower**

Fluid  
**AW HYDRAULIC OIL ISO 46 (300 LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

### Wear

All component wear rates are normal.

### Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0840705</b>	PP	---
Sample Date	Client Info			<b>24 Jul 2023</b>	10 May 2023	---
Machine Age	hrs	Client Info		<b>0</b>	0	---
Oil Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed	Client Info			<b>N/A</b>	N/A	---
Sample Status				<b>NORMAL</b>	NORMAL	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>20	<b>0</b>	0	---
Chromium	ppm	ASTM D5185(m)	>20	<b>0</b>	0	---
Nickel	ppm	ASTM D5185(m)	>20	<b>0</b>	0	---
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	---
Silver	ppm	ASTM D5185(m)		<b>0</b>	0	---
Aluminum	ppm	ASTM D5185(m)	>20	<b>0</b>	0	---
Lead	ppm	ASTM D5185(m)	>20	<b>0</b>	0	---
Copper	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	0	---
Tin	ppm	ASTM D5185(m)	>20	<b>0</b>	0	---
Antimony	ppm	ASTM D5185(m)		<b>0</b>	<1	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	---
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	---
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	5	<b>0</b>	<1	---
Barium	ppm	ASTM D5185(m)	5	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185(m)	5	<b>0</b>	0	---
Manganese	ppm	ASTM D5185(m)		<b>0</b>	0	---
Magnesium	ppm	ASTM D5185(m)	25	<b>1</b>	1	---
Calcium	ppm	ASTM D5185(m)	200	<b>52</b>	53	---
Phosphorus	ppm	ASTM D5185(m)	300	<b>372</b>	379	---
Zinc	ppm	ASTM D5185(m)	370	<b>445</b>	433	---
Sulfur	ppm	ASTM D5185(m)	2500	<b>911</b>	942	---
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	---





CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>15	<b>1</b>	3	---
Sodium	ppm	ASTM D5185(m)		<b>0</b>	0	---
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	0	---

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>2500	<b>561</b>	585	---
Particles >6µm		ASTM D7647	>640	<b>110</b>	177	---
Particles >14µm		ASTM D7647	>80	<b>12</b>	15	---
Particles >21µm		ASTM D7647	>20	<b>4</b>	5	---
Particles >38µm		ASTM D7647	>4	<b>1</b>	0	---
Particles >71µm		ASTM D7647	>3	<b>0</b>	0	---
Oil Cleanliness		ISO 4406 (c)	>18/16/13	<b>16/14/11</b>	16/15/11	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	0.57	<b>0.32</b>	0.37	---




# OIL ANALYSIS REPORT

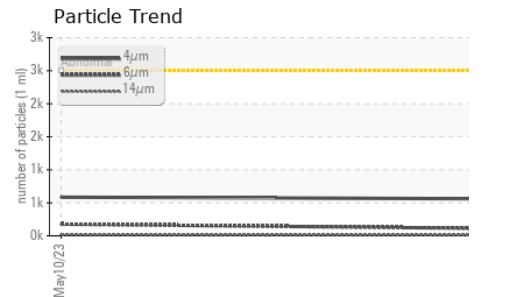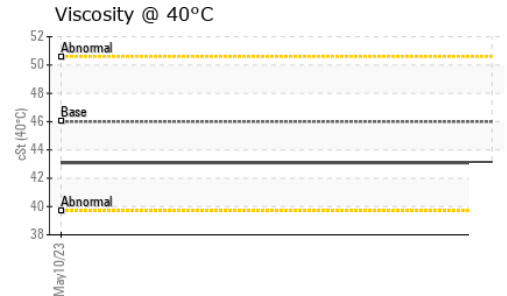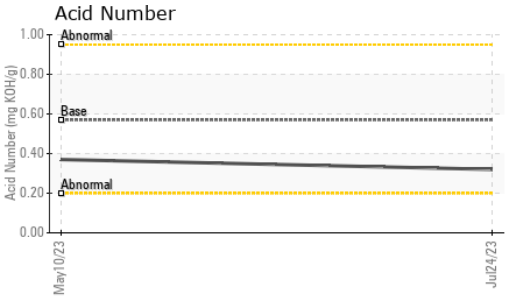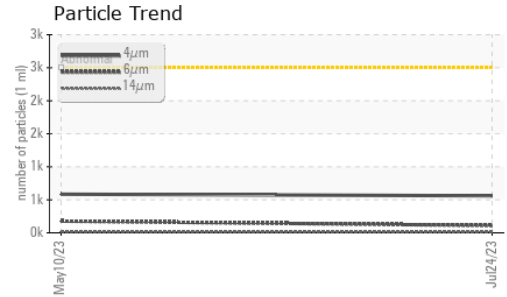






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	---
Emulsified Water	scalar	Visual*	NEG	NEG	---
Free Water	scalar	Visual*	NEG	NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	46	43.1	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

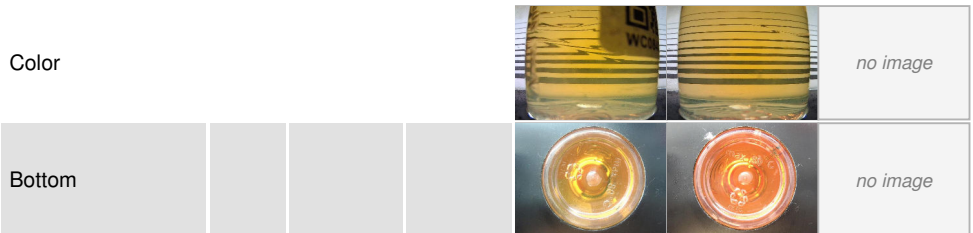

## GRAPHS

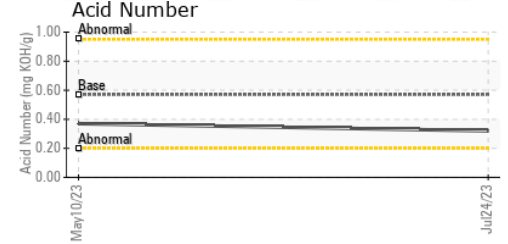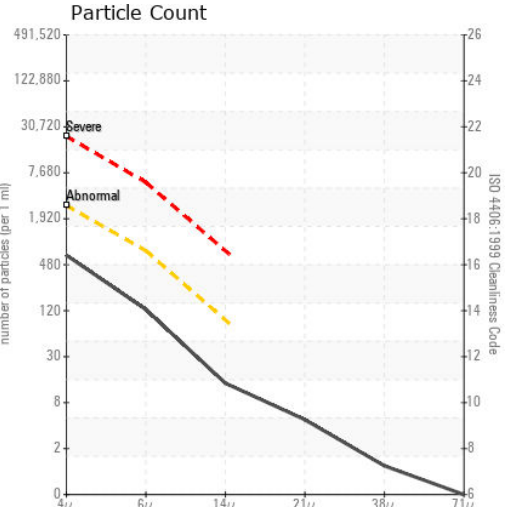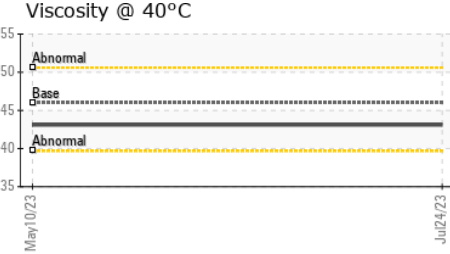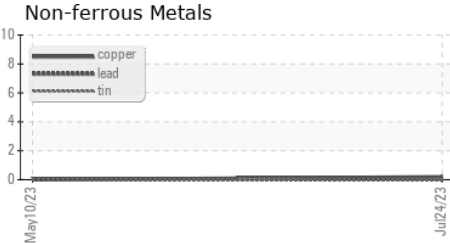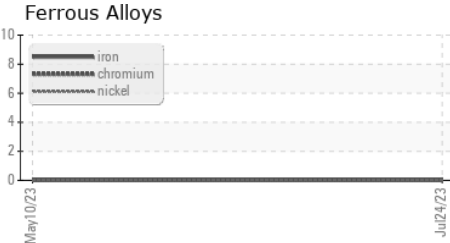

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 DUFFIN CREEK (YORK-DURHAM) WPCP  
**Sample No.** : WC0840705 **Received** : 18 Aug 2023 **901 MCKAY ROAD**  
**Lab Number** : 02576782 **Diagnosed** : 22 Aug 2023 **PICKERING, ON**  
**Unique Number** : 5629842 **Diagnostician** : Wes Davis **CA L1W 3A3**  
**Test Package** : IND 2

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.