



# OIL ANALYSIS REPORT

Sample Rating Trend


**NORMAL**



Machine Id  
**EPIROC MT65 TRK219**

Component  
**Rear Left Planetary**

Fluid  
**PENNZOIL SYNTHETIC SAE 75W140 GL-5 (--- GAL)**

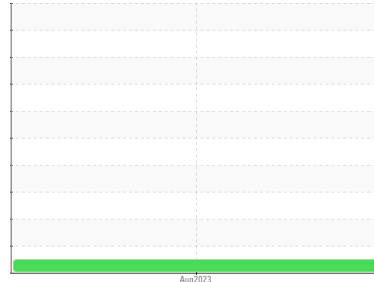

## DIAGNOSIS

### Recommendation

Confirm the source of the lubricant being utilized for top-up/fill. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

Additive levels indicate the addition of a different brand, or type of oil. The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0750497</b>	---	---
Sample Date	Client Info		<b>15 Aug 2023</b>	---	---
Machine Age	hrs	Client Info	<b>6580</b>	---	---
Oil Age	hrs	Client Info	<b>500</b>	---	---
Oil Changed	Client Info		<b>Not Chngd</b>	---	---
Sample Status			<b>NORMAL</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >500	<b>22</b>	---	---
Chromium	ppm	ASTM D5185(m) >10	<b>0</b>	---	---
Nickel	ppm	ASTM D5185(m) >10	<b>0</b>	---	---
Titanium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Silver	ppm	ASTM D5185(m)	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185(m) >25	<b>&lt;1</b>	---	---
Lead	ppm	ASTM D5185(m) >25	<b>0</b>	---	---
Copper	ppm	ASTM D5185(m) >75	<b>&lt;1</b>	---	---
Tin	ppm	ASTM D5185(m) >10	<b>0</b>	---	---
Antimony	ppm	ASTM D5185(m) >5	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	---	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	<b>97</b>	---	---
Barium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185(m)	<b>&lt;1</b>	---	---
Manganese	ppm	ASTM D5185(m)	<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185(m)	<b>&lt;1</b>	---	---
Calcium	ppm	ASTM D5185(m)	<b>6</b>	---	---
Phosphorus	ppm	ASTM D5185(m)	<b>912</b>	---	---
Zinc	ppm	ASTM D5185(m)	<b>6</b>	---	---
Sulfur	ppm	ASTM D5185(m)	<b>18998</b>	---	---
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	---	---

## CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >75	<b>4</b>	---	---
Sodium	ppm	ASTM D5185(m)	<b>1</b>	---	---
Potassium	ppm	ASTM D5185(m) >20	<b>&lt;1</b>	---	---

## VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	Visual* NONE	<b>VLITE</b>	---	---
Yellow Metal	scalar	Visual* NONE	<b>NONE</b>	---	---
Precipitate	scalar	Visual* NONE	<b>NONE</b>	---	---
Silt	scalar	Visual* NONE	<b>NONE</b>	---	---
Debris	scalar	Visual* NONE	<b>VLITE</b>	---	---
Sand/Dirt	scalar	Visual* NONE	<b>NONE</b>	---	---
Appearance	scalar	Visual* NORML	<b>NORML</b>	---	---
Odor	scalar	Visual* NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	Visual* >0.2	<b>NEG</b>	---	---
Free Water	scalar	Visual*	<b>NEG</b>	---	---



# OIL ANALYSIS REPORT








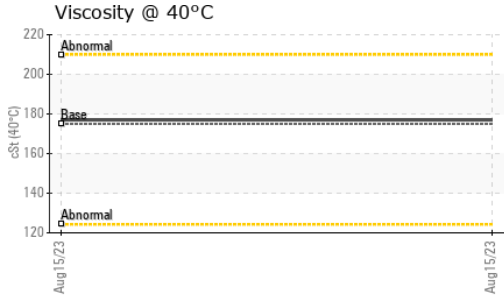


FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	175	177	---	---

SAMPLE IMAGES		method	limit/base	current	history1	history2
---------------	--	--------	------------	---------	----------	----------

Color		no image	no image
Bottom		no image	no image

## GRAPHS

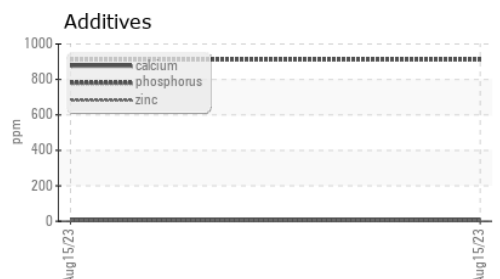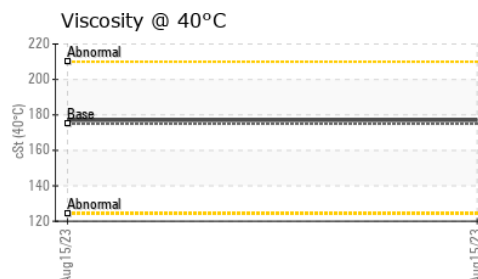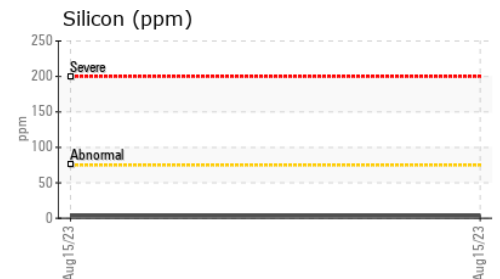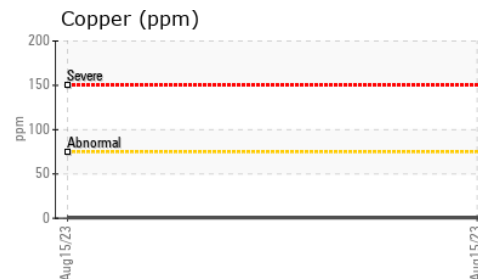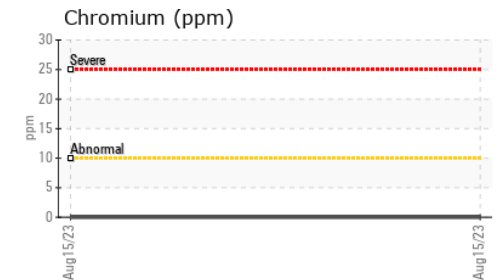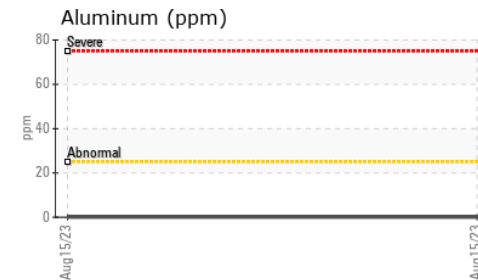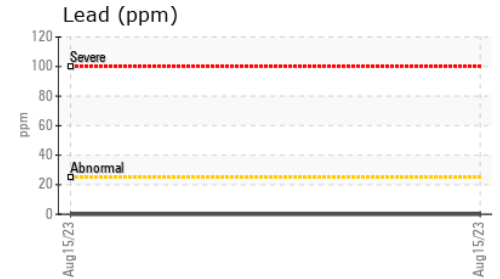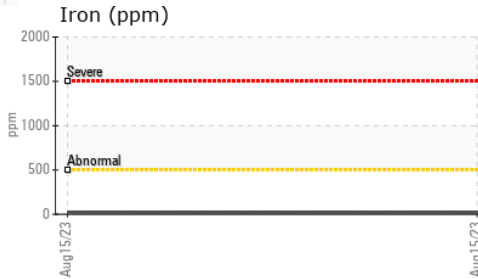

ISO 17025:2017  
Accredited  
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
 Sample No. : WC0750497 Received : 18 Aug 2023  
 Lab Number : 02576850 Diagnosed : 18 Aug 2023  
 Unique Number : 5629910 Diagnostician : Wes Davis  
 Test Package : MOB 1

**Agnico Eagle Canada**  
 1350 Government Rd. W, MACASSA COMPLEX  
 Kirkland Lake, ON  
 CA P2N 3J1  
 Contact: Mitch Lamontagne  
 AEM\_KL\_macassaoilsampleresults@agnicoeagle.com  
 T: (705)567-5208  
 F: (705)567-5221

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.