




PROBLEM SUMMARY

Sample Rating Trend

ADDITIVES


Area
Ravenswood SP-24224
Machine Id
T4 (S/N 23960)

Component
Wind Turbine Gearbox
Fluid
MOBIL MOBILGEAR SHC XMP 320 (280 LTR)

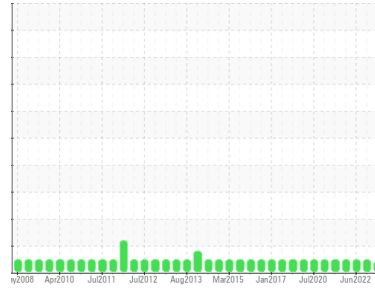

COMPONENT CONDITION SUMMARY

▲ Additives

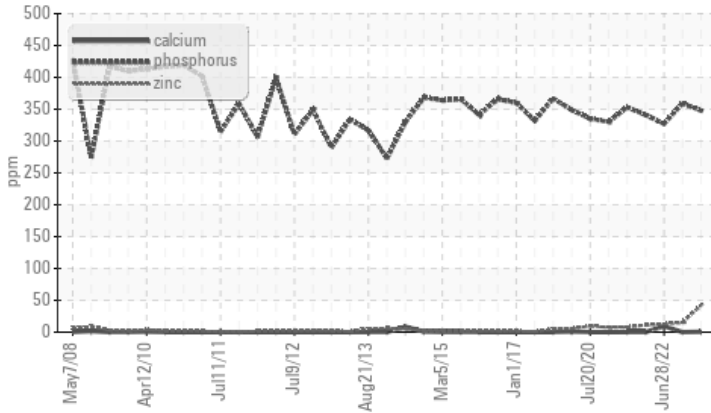

RECOMMENDATION

Confirm the source of the lubricant being utilized for top-up/fill. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

| Sample Status | | | ABNORMAL | NORMAL | NORMAL |
|---------------|-----|---------------|----------|--------|--------|
| Zinc | ppm | ASTM D5185(m) | 0 | ▲ 42 | 15 |
| | | | | | 13 |

Customer Id: VESTAS
Sample No.: WC0783104
Lab Number: 02576929
Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
Bill Quesnel CLS,OMA II,MLA-III,LLA-I +1
(289)291-4641 x4641
Bill.Quesnel@wearcheck.com

To change component or sample information:
Gloria Gonzalez +1 (289)291-4643 x4643
gloria.gonzalez@wearcheck.com

RECOMMENDED ACTIONS

| Action | Status | Date | Done By | Description |
|--------------------|--------|------|---------|---|
| Check Fluid Source | --- | --- | ? | Confirm the source of the lubricant being utilized for top-up/fill. |

HISTORICAL DIAGNOSIS

11 Jan 2023 Diag: Kevin Marson

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The water content is negligible. The system and fluid cleanliness is acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



28 Jun 2022 Diag: Kevin Marson

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The water content is negligible. The system and fluid cleanliness is acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



14 Jan 2022 Diag: Bill Quesnel

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The water content is negligible. The system and fluid cleanliness is acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report






OIL ANALYSIS REPORT

Sample Rating Trend

ADDITIVES

Area
Ravenswood SP-24224
Machine Id
T4 (S/N 23960)

Component
Wind Turbine Gearbox
Fluid
MOBIL MOBILGEAR SHC XMP 320 (280 LTR)

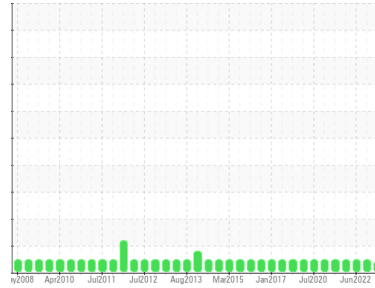

DIAGNOSIS

Recommendation

Confirm the source of the lubricant being utilized for top-up/fill. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The water content is negligible. The system and fluid cleanliness is acceptable.

Fluid Condition

Additive levels indicate the addition of a different brand, or type of oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | WC0783104 | WC0305871 | WC0632676 |
| Sample Date | Client Info | | 14 Jul 2023 | 11 Jan 2023 | 28 Jun 2022 |
| Machine Age | mths | Client Info | 0 | 0 | 0 |
| Oil Age | mths | Client Info | 0 | 0 | 0 |
| Oil Changed | Client Info | | N/A | N/A | N/A |
| Sample Status | | | ABNORMAL | NORMAL | NORMAL |

WEAR METALS

| | method | limit/base | current | history1 | history2 | |
|-----------|-------------|---------------|----------|-----------|----------|----|
| PQ | ASTM D8184* | >50 | 0 | 0 | 0 | |
| Iron | ppm | ASTM D5185(m) | >75 | 24 | 17 | 14 |
| Chromium | ppm | ASTM D5185(m) | >5 | 0 | 0 | 0 |
| Nickel | ppm | ASTM D5185(m) | >10 | 0 | <1 | 0 |
| Titanium | ppm | ASTM D5185(m) | >10 | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185(m) | >10 | 0 | 0 | 0 |
| Lead | ppm | ASTM D5185(m) | >15 | 0 | <1 | <1 |
| Copper | ppm | ASTM D5185(m) | >5 | 4 | 4 | 3 |
| Tin | ppm | ASTM D5185(m) | >10 | 0 | 0 | 0 |
| Antimony | ppm | ASTM D5185(m) | >5 | 0 | <1 | 0 |
| Vanadium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Beryllium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |

ADDITIVES

| | method | limit/base | current | history1 | history2 | |
|------------|--------|---------------|---------|--------------|----------|------|
| Boron | ppm | ASTM D5185(m) | 0 | <1 | <1 | <1 |
| Barium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185(m) | 0 | 0 | 0 | 0 |
| Manganese | ppm | ASTM D5185(m) | | 0 | <1 | 0 |
| Magnesium | ppm | ASTM D5185(m) | | 0 | 0 | <1 |
| Calcium | ppm | ASTM D5185(m) | 0 | <1 | 0 | 9 |
| Phosphorus | ppm | ASTM D5185(m) | 485 | 348 | 359 | 327 |
| Zinc | ppm | ASTM D5185(m) | 0 | ▲ 42 | 15 | 13 |
| Sulfur | ppm | ASTM D5185(m) | | 3685 | 3829 | 3779 |
| Lithium | ppm | ASTM D5185(m) | | <1 | <1 | <1 |

CONTAMINANTS

| | method | limit/base | current | history1 | history2 | |
|-----------|--------|---------------|---------|--------------|----------|-------|
| Silicon | ppm | ASTM D5185(m) | >40 | 10 | 10 | 10 |
| Sodium | ppm | ASTM D5185(m) | >10 | <1 | <1 | <1 |
| Potassium | ppm | ASTM D5185(m) | >20 | <1 | <1 | <1 |
| Water | % | ASTM D6304* | >0.02 | 0.006 | 0.006 | 0.009 |
| ppm Water | ppm | ASTM D6304* | >200 | 62.9 | 61.5 | 97.8 |


INFRA-RED

| | method | limit/base | current | history1 | history2 | |
|-----------|----------|-------------|---------|-------------|----------|------|
| Soot % | % | ASTM D7844* | | 0 | 0 | 0 |
| Nitration | Abs/cm | ASTM D7624* | | 2.4 | 2.5 | 2.3 |
| Sulfation | Abs/.1mm | ASTM D7415* | | 48.5 | 22.7 | 18.3 |




OIL ANALYSIS REPORT


Additives

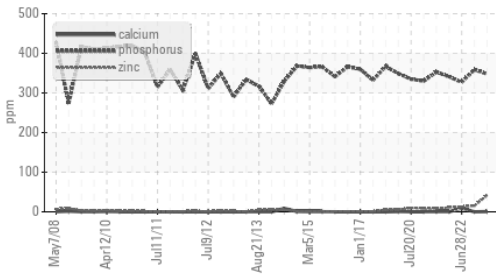


Particle Count

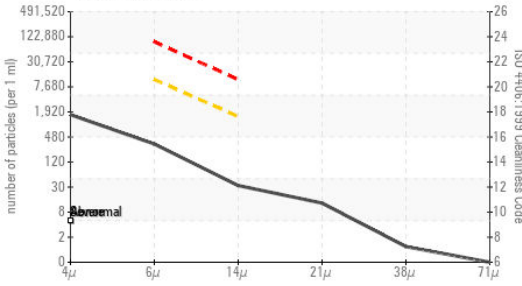


Acid Number

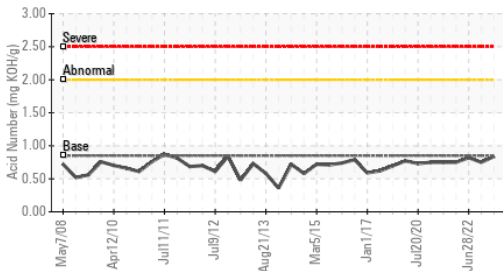

Water

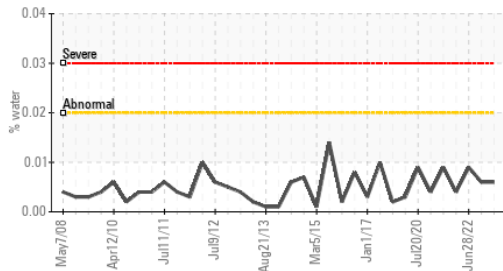

Viscosity @ 100°C

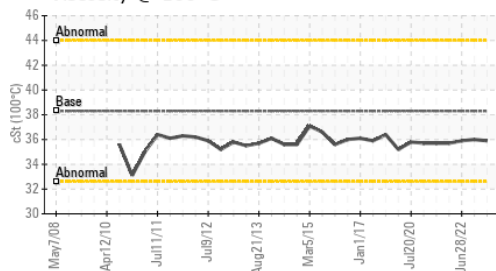


| FLUID CLEANLINESS | method | limit/base | current | history1 | history2 |
|-------------------|--------------|------------|-----------------|----------|----------|
| Particles >4µm | ASTM D7647 | | 1443 | 3465 | 5499 |
| Particles >6µm | ASTM D7647 | >10000 | 286 | 221 | 546 |
| Particles >14µm | ASTM D7647 | >1300 | 29 | 7 | 22 |
| Particles >21µm | ASTM D7647 | >320 | 11 | 3 | 7 |
| Particles >38µm | ASTM D7647 | >80 | 1 | 0 | 1 |
| Particles >71µm | ASTM D7647 | >20 | 0 | 0 | 1 |
| Oil Cleanliness | ISO 4406 (c) | >--/20/17 | 18/15/12 | 19/15/10 | 20/16/12 |

| FLUID DEGRADATION | method | limit/base | current | history1 | history2 |
|-------------------|----------|-------------|-------------|----------|----------|
| Oxidation | Abs/.1mm | ASTM D7414* | 55.0 | 15.7 | 13.0 |
| Acid Number (AN) | mg KOH/g | ASTM D974* | 0.84 | 0.75 | 0.82 |

| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|--------------|----------|----------|
| White Metal | scalar | Visual* | NONE | NONE | NONE |
| Yellow Metal | scalar | Visual* | NONE | NONE | NONE |
| Precipitate | scalar | Visual* | NONE | NONE | NONE |
| Silt | scalar | Visual* | NONE | NONE | NONE |
| Debris | scalar | Visual* | NONE | NONE | NONE |
| Sand/Dirt | scalar | Visual* | NONE | NONE | NONE |
| Appearance | scalar | Visual* | NORML | NORML | NORML |
| Odor | scalar | Visual* | NORML | NORML | NORML |
| Emulsified Water | scalar | Visual* | NEG | NEG | NEG |
| Free Water | scalar | Visual* | NEG | NEG | NEG |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|----------------------|--------|---------------|-------------|----------|----------|
| Visc @ 40°C | cSt | ASTM D7279(m) | 316 | 317 | 317 |
| Visc @ 100°C | cSt | ASTM D7279(m) | 35.9 | 36.0 | 35.9 |
| Viscosity Index (VI) | Scale | ASTM D2270* | 160 | 160 | 160 |

SAMPLE IMAGES

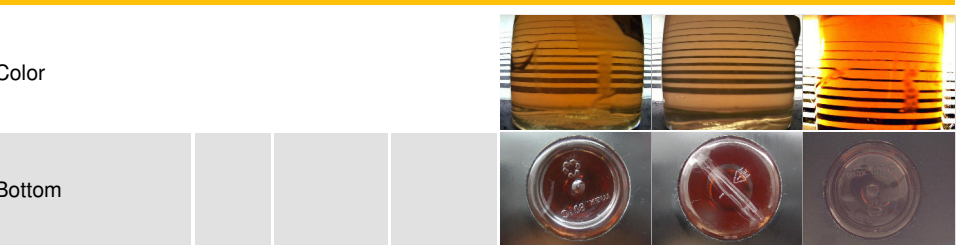

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 Vestas American Wind Technology Inc.
Sample No. : WC0783104
Lab Number : **02576929**
Unique Number : 5629989
Test Package : IND 2 (Additional Tests: FT-IR, KF, KV100, PQ, TAN Man, VI)

Received : 18 Aug 2023
Diagnosed : 23 Aug 2023
Diagnostician : Bill Quesnel

1417 NW Everett Street
Portland, OR
US 97209
Contact: Nicole Philippi
NiPhi@vestas.com
T: (503)327-7683
F: (503)327-0247

To discuss this sample report, contact Customer Service at 1-800-268-2131.
Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
Validity of results and interpretation are based on the sample and information as supplied.