



OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Area
Cascades - C13100
 Machine Id
AG185-R
 Component
Gear Unit
 Fluid
GEAR OIL ISO 220 (--- GAL)

DIAGNOSIS

Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The water content is negligible. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION	method	limit/base	current	history1	history2
Sample Number	Client Info		E30000087	---	---
Sample Date	Client Info		16 Aug 2023	---	---
Machine Age	hrs	Client Info	0	---	---
Oil Age	hrs	Client Info	0	---	---
Oil Changed	Client Info		N/A	---	---
Sample Status			NORMAL	---	---






WEAR METALS	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >150	5	---	---
Chromium	ppm	ASTM D5185(m) >10	0	---	---
Nickel	ppm	ASTM D5185(m) >10	0	---	---
Titanium	ppm	ASTM D5185(m)	0	---	---
Silver	ppm	ASTM D5185(m)	0	---	---
Aluminum	ppm	ASTM D5185(m) >25	0	---	---
Lead	ppm	ASTM D5185(m) >100	0	---	---
Copper	ppm	ASTM D5185(m) >50	<1	---	---
Tin	ppm	ASTM D5185(m) >10	0	---	---
Antimony	ppm	ASTM D5185(m) >5	0	---	---
Vanadium	ppm	ASTM D5185(m)	<1	---	---
Beryllium	ppm	ASTM D5185(m)	0	---	---
Cadmium	ppm	ASTM D5185(m)	0	---	---

ADDITIVES	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 50	15	---	---
Barium	ppm	ASTM D5185(m) 15	0	---	---
Molybdenum	ppm	ASTM D5185(m) 15	0	---	---
Manganese	ppm	ASTM D5185(m)	0	---	---
Magnesium	ppm	ASTM D5185(m) 50	<1	---	---
Calcium	ppm	ASTM D5185(m) 50	2	---	---
Phosphorus	ppm	ASTM D5185(m) 350	326	---	---
Zinc	ppm	ASTM D5185(m) 100	4	---	---
Sulfur	ppm	ASTM D5185(m) 12500	13717	---	---
Lithium	ppm	ASTM D5185(m)	<1	---	---

CONTAMINANTS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >50	36	---	---
Sodium	ppm	ASTM D5185(m)	3	---	---
Potassium	ppm	ASTM D5185(m) >20	1	---	---
Water	%	ASTM D6304* >0.1	0.002	---	---
ppm Water	ppm	ASTM D6304* >1000	19.8	---	---

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>20000	59	---	---
Particles >6µm	ASTM D7647	>5000	26	---	---
Particles >14µm	ASTM D7647	>640	6	---	---
Particles >21µm	ASTM D7647	>160	3	---	---
Particles >38µm	ASTM D7647	>40	1	---	---
Particles >71µm	ASTM D7647	>10	1	---	---
Oil Cleanliness	ISO 4406 (c)	>21/19/16	13/12/10	---	---

OIL ANALYSIS REPORT

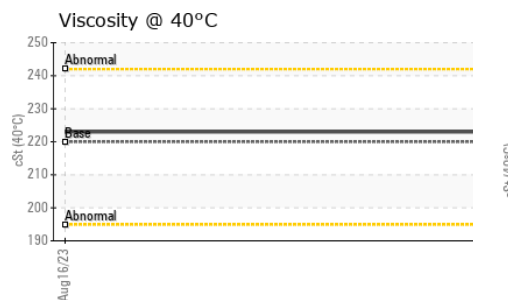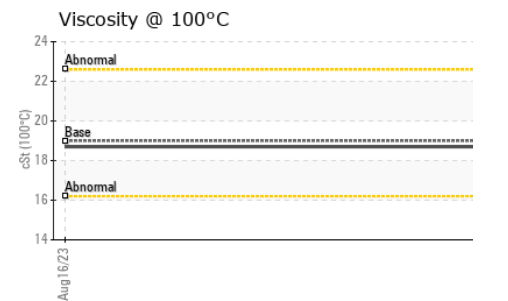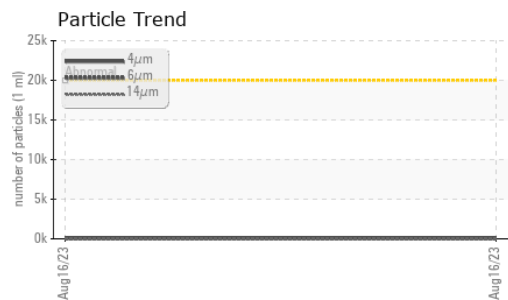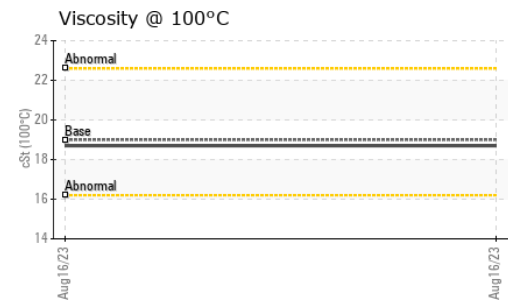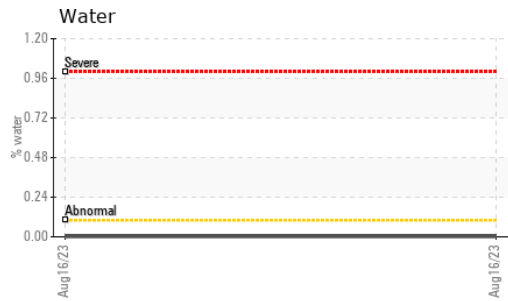




FLUID DEGRADATION	method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D974*	0.85	0.66	---	---

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Precipitate	scalar	Visual*	NONE	NONE	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---	---
Free Water	scalar	Visual*		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D7279(m)	220	223	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	19.0	18.7	---	---
Viscosity Index (VI)	Scale	ASTM D2270*	96	93	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

GRAPHS

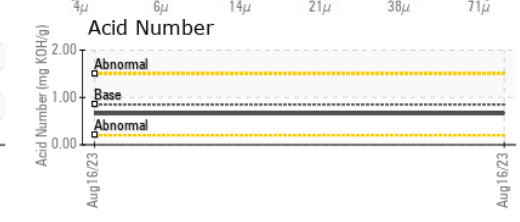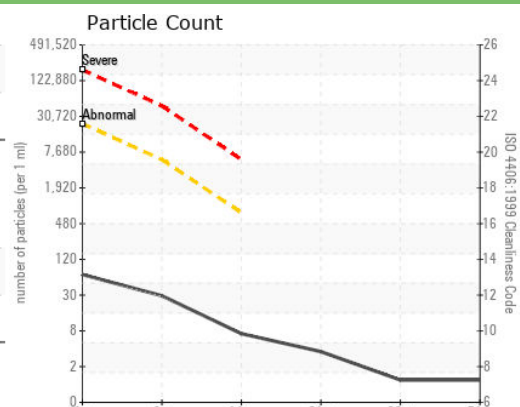

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : E30000087 **Received** : 18 Aug 2023
Lab Number : **02576933** **Diagnosed** : 23 Aug 2023
Unique Number : 5629993 **Diagnostician** : Tatiana Sorkina
Test Package : IND 2 (Additional Tests: KF, KV100, PrtCount, TAN Man, VI)

Environmental 360 Solutions Ltd.
 640 Victoria Street
 Cobourg, ON
 CA K9A 5H5
 Contact: Tatiana Sorkina
 tsorkina@e360s.ca
 T: (800)263-3939
 F: (905)373-4950

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.