




PROBLEM SUMMARY

Sample Rating Trend

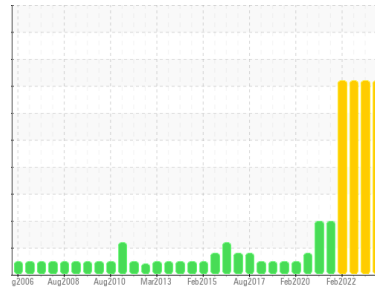

WEAR



Area
Kingsbridge SP-13584


Machine Id
T8

Component
Wind Turbine Gearbox


Fluid
CHEVRON PINNACLE WM 320 (--- LTR)

COMPONENT CONDITION SUMMARY

Ferrous Alloys

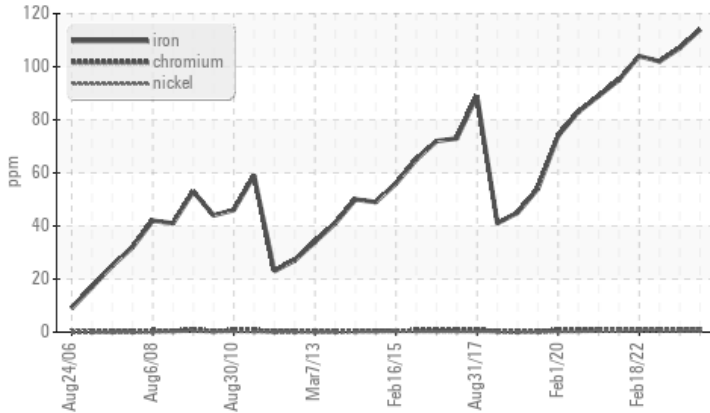

Acid Number

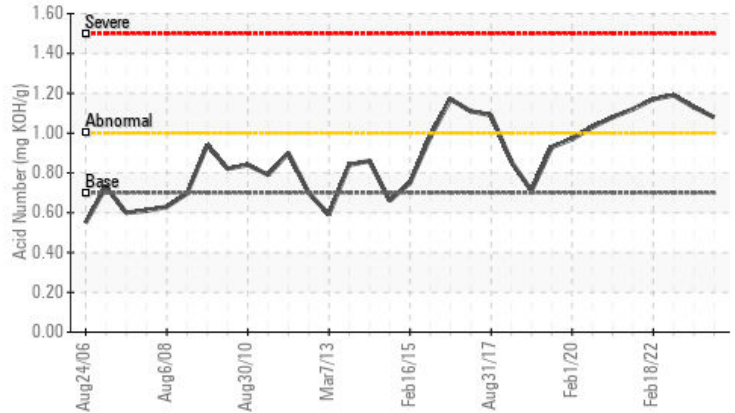

RECOMMENDATION

We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

PROBLEMATIC TEST RESULTS

Sample Status		SEVERE	SEVERE	SEVERE
Iron	ppm ASTM D5185(m) >75	114	107	102
Acid Number (AN)	mg KOH/g ASTM D974* 0.7	1.08	1.13	1.19

Customer Id: VESTAS
Sample No.: WC0783146
Lab Number: 02576949
Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
Bill Quesnel CLS, OMA II, MLA-III, LLA-I +1
(289)291-4641 x4641
Bill.Quesnel@wearcheck.com

To change component or sample information:
Gloria Gonzalez +1 (289)291-4643 x4643
gloria.gonzalez@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	We recommend that you drain the oil from the component if this has not already been done.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Information Required	---	---	?	NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

HISTORICAL DIAGNOSIS

13 Mar 2023 Diag: Kevin Marson

WEAR



We recommend an early resample to monitor this condition. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Iron ppm levels are severe. The low ferrous density (PQ) index indicates the wear metal levels are due to corrosion. The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The water content is negligible. The system and fluid cleanliness is acceptable. The AN level is above the recommended limit. The oil is no longer serviceable.

view report



01 Sep 2022 Diag: Bill Quesnel

WEAR



We recommend an early resample to monitor this condition. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Iron ppm levels are severe. The low ferrous density (PQ) index indicates the wear metal levels are due to corrosion. The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The water content is negligible. The system and fluid cleanliness is acceptable. The AN level is above the recommended limit. The oil is no longer serviceable.

view report



18 Feb 2022 Diag: Kevin Marson

WEAR



We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Iron ppm levels are severe. The low ferrous density (PQ) index indicates the wear metal levels are due to corrosion. The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The water content is negligible. The system and fluid cleanliness is acceptable. The AN level is above the recommended limit. The oil is no longer serviceable.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

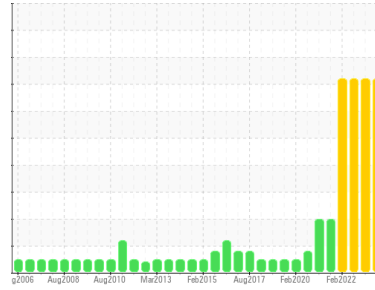

WEAR



Area
Kingsbridge SP-13584
 Machine Id
T8
 Component
Wind Turbine Gearbox
 Fluid
CHEVRON PINNACLE WM 320 (--- LTR)

DIAGNOSIS

Recommendation

We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

Wear

Iron ppm levels are severe. The low ferrous density (PQ) index indicates the wear metal levels are due to corrosion.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The water content is negligible. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is above the recommended limit. The oil is no longer serviceable as a result of the abnormal and/or severe wear.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0783146	WC0305906	WC0305828
Sample Date	Client Info		31 Jul 2023	13 Mar 2023	01 Sep 2022
Machine Age	yrs	Client Info	0	0	0
Oil Age	yrs	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			SEVERE	SEVERE	SEVERE

WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184*	>50	0	0	0
Iron	ppm	ASTM D5185(m) >75	114	107	102
Chromium	ppm	ASTM D5185(m) >5	1	<1	<1
Nickel	ppm	ASTM D5185(m) >10	<1	<1	<1
Titanium	ppm	ASTM D5185(m) >10	0	0	0
Silver	ppm	ASTM D5185(m)	0	0	0
Aluminum	ppm	ASTM D5185(m) >10	0	<1	<1
Lead	ppm	ASTM D5185(m) >15	<1	<1	<1
Copper	ppm	ASTM D5185(m) >10	2	2	1
Tin	ppm	ASTM D5185(m) >10	0	0	0
Antimony	ppm	ASTM D5185(m) >5	0	0	<1
Vanadium	ppm	ASTM D5185(m)	0	0	0
Beryllium	ppm	ASTM D5185(m)	0	0	0
Cadmium	ppm	ASTM D5185(m)	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 0	<1	<1	<1
Barium	ppm	ASTM D5185(m) 0	0	0	0
Molybdenum	ppm	ASTM D5185(m) 0	0	0	0
Manganese	ppm	ASTM D5185(m)	1	2	1
Magnesium	ppm	ASTM D5185(m) 0	<1	0	0
Calcium	ppm	ASTM D5185(m) 0	1	0	<1
Phosphorus	ppm	ASTM D5185(m) 300	273	278	282
Zinc	ppm	ASTM D5185(m) 0	19	17	16
Sulfur	ppm	ASTM D5185(m) 8000	7310	7524	7292
Lithium	ppm	ASTM D5185(m)	<1	<1	<1

CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >10	2	1	<1
Sodium	ppm	ASTM D5185(m) >10	7	6	6
Potassium	ppm	ASTM D5185(m) >20	<1	<1	<1
Water	%	ASTM D6304* >0.02	0.007	0.005	0.009
ppm Water	ppm	ASTM D6304* >200	79.0	56.6	95.2

INFRA-RED


	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	0	0	0
Nitration	Abs/cm	ASTM D7624*	2.2	2.4	2.1
Sulfation	Abs/.1mm	ASTM D7415*	28.7	21.6	28.0

OIL ANALYSIS REPORT


Ferrous Alloys

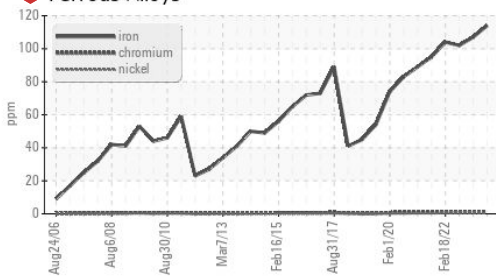


Acid Number

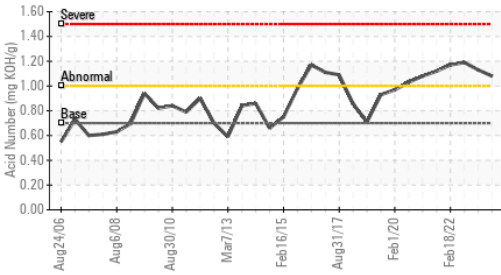


Particle Count

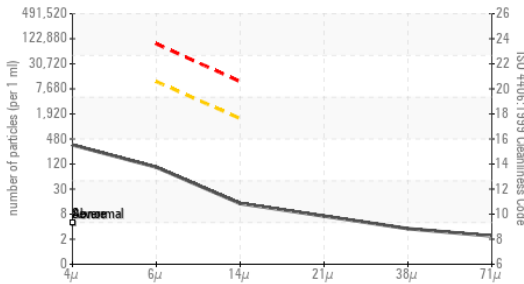

Water

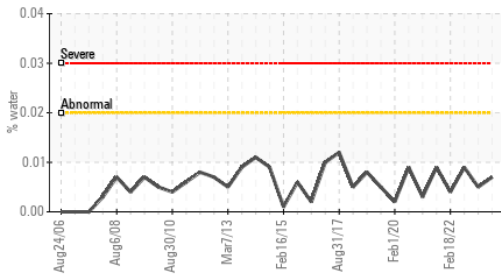

Viscosity @ 100°C

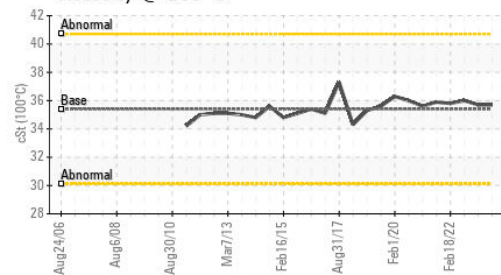


FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		304	1464	422
Particles >6µm	ASTM D7647	>10000	89	373	72
Particles >14µm	ASTM D7647	>1300	12	21	4
Particles >21µm	ASTM D7647	>320	6	2	2
Particles >38µm	ASTM D7647	>80	3	0	0
Particles >71µm	ASTM D7647	>20	2	0	0
Oil Cleanliness	ISO 4406 (c)	>--/20/17	15/14/11	18/16/12	16/13/9

FLUID DEGRADATION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm ASTM D7414*		28.7	15.3	29.1
Acid Number (AN)	mg KOH/g ASTM D974*	0.7	1.08	1.13	1.19

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar Visual*	NONE	NONE	NONE	NONE
Precipitate	scalar Visual*	NONE	NONE	NONE	NONE
Silt	scalar Visual*	NONE	NONE	NONE	NONE
Debris	scalar Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar Visual*	NONE	NONE	NONE	NONE
Appearance	scalar Visual*	NORML	NORML	NORML	NORML
Odor	scalar Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar Visual*	>0.02	NEG	NEG	NEG
Free Water	scalar Visual*		NEG	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt ASTM D7279(m)	319	325	328	329
Visc @ 100°C	cSt ASTM D7279(m)	35.4	35.7	35.7	36.0
Viscosity Index (VI)	Scale ASTM D2270*	156	156	154	155

SAMPLE IMAGES

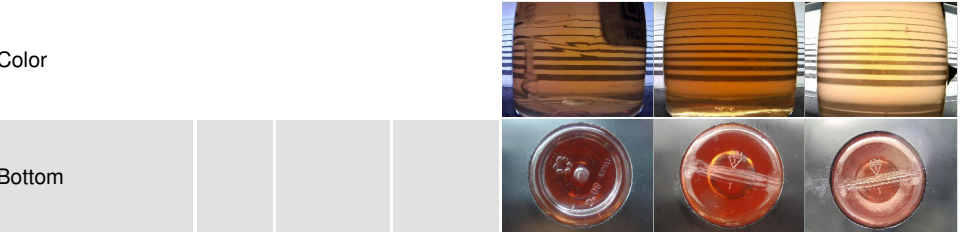

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 Vestas American Wind Technology Inc.
Sample No. : WC0783146
Lab Number : **02576949**
Unique Number : 5630009
Test Package : IND 2 (Additional Tests: FT-IR, KF, KV100, PQ, PrtCount, TAN Man, VI)

Received : 18 Aug 2023
Diagnosed : 23 Aug 2023
Diagnostician : Bill Quesnel
1417 NW Everett Street
Portland, OR
US 97209
Contact: Nicole Philippi
NiPhi@vestas.com
T: (503)327-7683
F: (503)327-0247

To discuss this sample report, contact Customer Service at 1-800-268-2131.
Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
Validity of results and interpretation are based on the sample and information as supplied.