



# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id  
**P3 GEARBOX**  
 Component  
**Gearbox**  
 Fluid  
**NOT GIVEN (--- LTR)**

## DIAGNOSIS

### Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

### Wear

All component wear rates are normal. The direct-reading & analytical ferrographic results are normal indicating no abnormal wear in the system.

### Contaminants

There is no indication of any contamination in the oil.

### Oil Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>CB0031283</b>	---	---
Sample Date	Client Info			<b>21 Jul 2023</b>	---	---
Machine Age	hrs	Client Info		<b>0</b>	---	---
Oil Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed	Client Info			<b>N/A</b>	---	---
Sample Status				<b>NORMAL</b>	---	---




WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184*		<b>0</b>	---	---
Iron	ppm	ASTM D5185(m)	>200	<b>10</b>	---	---
Chromium	ppm	ASTM D5185(m)	>15	<b>0</b>	---	---
Nickel	ppm	ASTM D5185(m)	>15	<b>0</b>	---	---
Titanium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Silver	ppm	ASTM D5185(m)		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185(m)	>25	<b>0</b>	---	---
Lead	ppm	ASTM D5185(m)	>100	<b>0</b>	---	---
Copper	ppm	ASTM D5185(m)	>200	<b>&lt;1</b>	---	---
Tin	ppm	ASTM D5185(m)	>25	<b>0</b>	---	---
Antimony	ppm	ASTM D5185(m)	>5	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<b>&lt;1</b>	---	---
Barium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185(m)		<b>&lt;1</b>	---	---
Manganese	ppm	ASTM D5185(m)		<b>0</b>	---	---
Magnesium	ppm	ASTM D5185(m)		<b>2</b>	---	---
Calcium	ppm	ASTM D5185(m)		<b>4</b>	---	---
Phosphorus	ppm	ASTM D5185(m)		<b>310</b>	---	---
Zinc	ppm	ASTM D5185(m)		<b>127</b>	---	---
Sulfur	ppm	ASTM D5185(m)		<b>8090</b>	---	---
Lithium	ppm	ASTM D5185(m)		<b>5</b>	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>50	<b>13</b>	---	---
Sodium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	---	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*		<b>0.35</b>	---	---

# OIL ANALYSIS REPORT

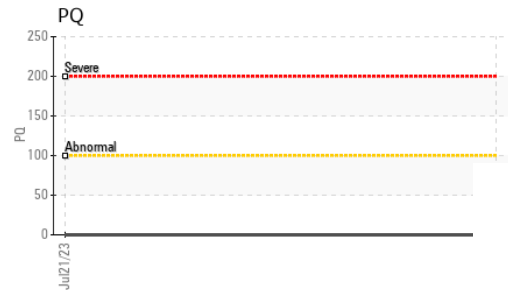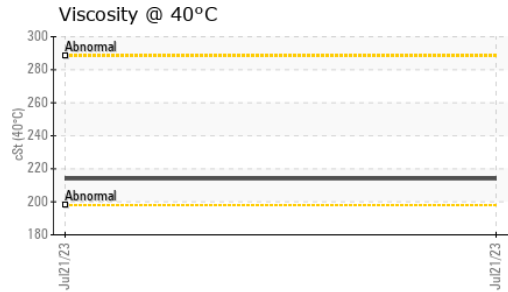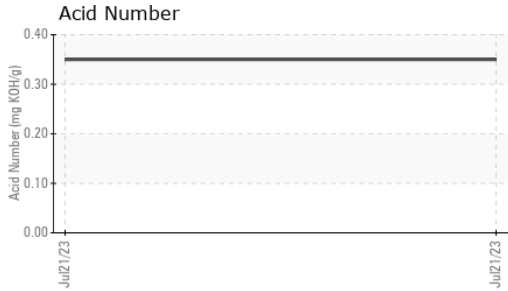





VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Precipitate	scalar	Visual*	NONE	NONE	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	VLITE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---
Free Water	scalar	Visual*		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	214	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color			no image	no image
Bottom			no image	no image

## GRAPHS

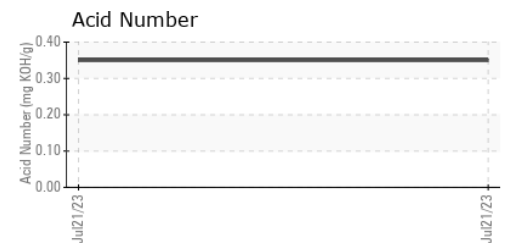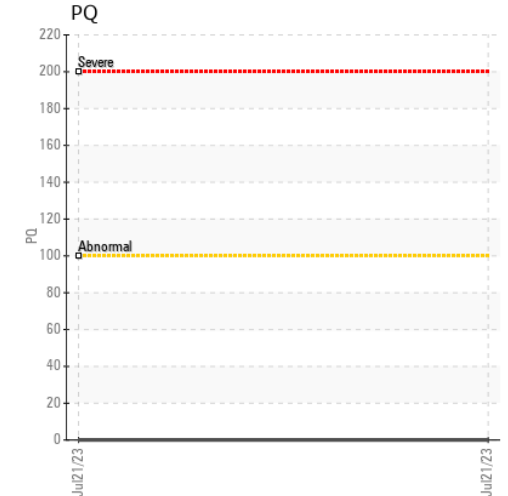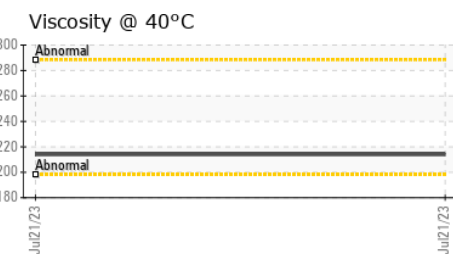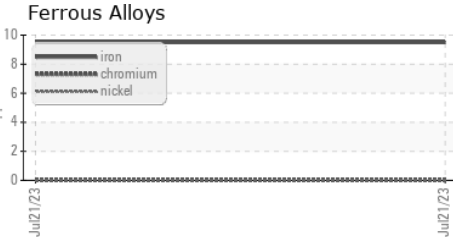




**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : CB0031283 **Received** : 18 Aug 2023  
**Lab Number** : 02576954 **Diagnosed** : 23 Aug 2023  
**Unique Number** : 5630014 **Diagnostician** : Kevin Marson  
**Test Package** : IND 3 ( Additional Tests: TAN Man )

**TOYOTA MOTOR MANUFACT.**  
 1055 FOUNTAIN STREET N.  
 CAMBRIDGE, ON  
 CA N3H 5K2  
 Contact: mike clappison  
 mike.clappison@toyota.com  
 T: (519)212-5023  
 F: (519)653-9638

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

# FERROGRAPHY REPORT

Machine Id  
**P3 GEARBOX**  
Component  
**Gearbox**  
Fluid  
**NOT GIVEN (--- LTR)**

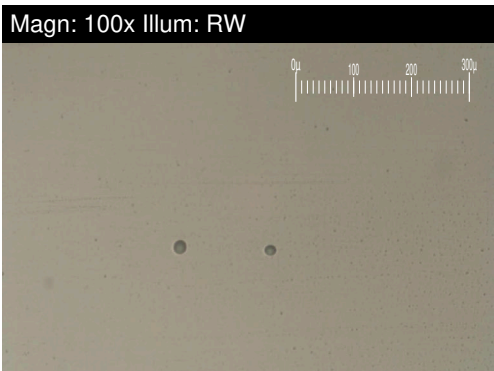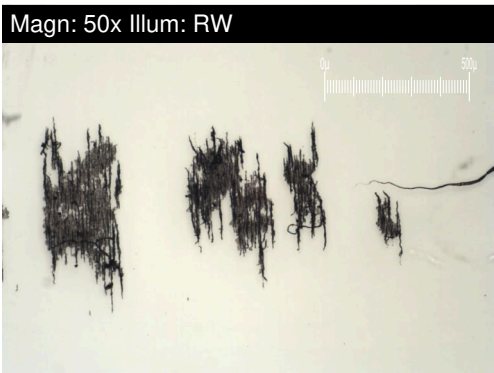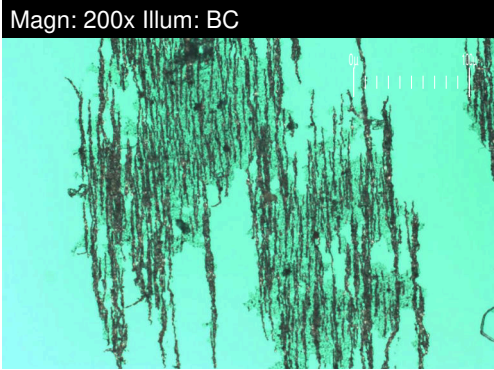


DR-FERROGRAPHY		method	limit/base	current	history1	history2
Large Particles		DR-Ferr*		<b>47.0</b>	---	---
Small Particles		DR-Ferr*		<b>21.5</b>	---	---
Total Particles		DR-Ferr*	>---	<b>68.5</b>	---	---
Large Particles Percentage	%	DR-Ferr*		<b>37.2</b>	---	---
Severity Index		DR-Ferr*		<b>1199</b>	---	---

FERROGRAPHY		method	limit/base	current	history1	history2
Ferrous Rubbing	Scale 0-10	ASTM D7684*		<b>4</b>		
Ferrous Sliding	Scale 0-10	ASTM D7684*				
Ferrous Cutting	Scale 0-10	ASTM D7684*				
Ferrous Rolling	Scale 0-10	ASTM D7684*		<b>2</b>		
Ferrous Break-in	Scale 0-10	ASTM D7684*				
Ferrous Spheres	Scale 0-10	ASTM D7684*				
Ferrous Black Oxides	Scale 0-10	ASTM D7684*				
Ferrous Red Oxides	Scale 0-10	ASTM D7684*				
Ferrous Corrosive	Scale 0-10	ASTM D7684*				
Ferrous Other	Scale 0-10	ASTM D7684*				
Nonferrous Rubbing	Scale 0-10	ASTM D7684*				
Nonferrous Sliding	Scale 0-10	ASTM D7684*				
Nonferrous Cutting	Scale 0-10	ASTM D7684*				
Nonferrous Rolling	Scale 0-10	ASTM D7684*				
Nonferrous Other	Scale 0-10	ASTM D7684*				
Carbonaceous Material	Scale 0-10	ASTM D7684*				
Lubricant Degradation	Scale 0-10	ASTM D7684*				
Sand/Dirt	Scale 0-10	ASTM D7684*		<b>1</b>		
Fibres	Scale 0-10	ASTM D7684*		<b>1</b>		
Spheres	Scale 0-10	ASTM D7684*				
Other	Scale 0-10	ASTM D7684*		<b>1</b>		

## WEAR

All component wear rates are normal. The direct-reading & analytical ferrographic results are normal indicating no abnormal wear in the system.

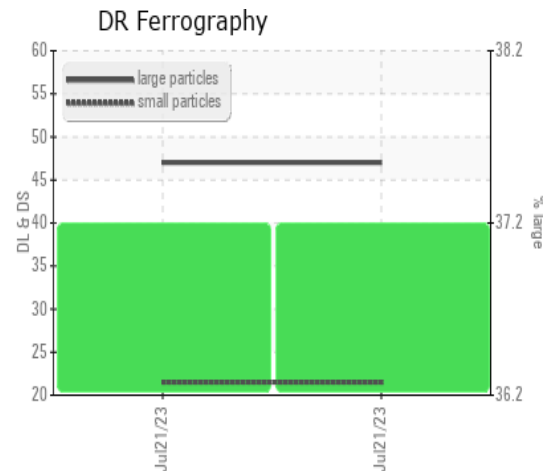

*This page left intentionally blank*