




OIL ANALYSIS REPORT

Sample Rating Trend

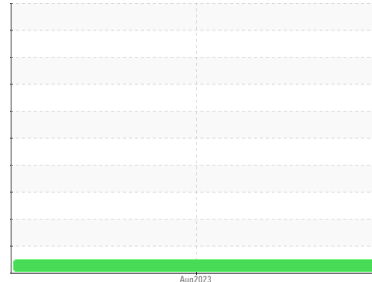

NORMAL



Machine Id
VBS343

Component
Reference New (Unused) Oil

Fluid
SINTO MULTIGRADE BIO (--- GAL)

DIAGNOSIS

Recommendation

Il s'agit du relevé de base de l'échantillon soumis.

Wear

{sans objet}

Contamination

{sans objet}

Fluid Condition

{sans objet}

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC	---	---
Sample Date	Client Info			17 Aug 2023	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		0	---	---
Oil Changed	Client Info			N/A	---	---
Sample Status				NORMAL	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>5	<1	---	---
Chromium	ppm	ASTM D5185(m)	>5	0	---	---
Nickel	ppm	ASTM D5185(m)	>5	0	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)	>5	<1	---	---
Aluminum	ppm	ASTM D5185(m)	>5	0	---	---
Lead	ppm	ASTM D5185(m)	>5	<1	---	---
Copper	ppm	ASTM D5185(m)	>5	<1	---	---
Tin	ppm	ASTM D5185(m)	>5	0	---	---
Antimony	ppm	ASTM D5185(m)		0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
Beryllium	ppm	ASTM D5185(m)		0	---	---
Cadmium	ppm	ASTM D5185(m)		0	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	1	2	---	---
Barium	ppm	ASTM D5185(m)	0	0	---	---
Molybdenum	ppm	ASTM D5185(m)	0	0	---	---
Manganese	ppm	ASTM D5185(m)	0	0	---	---
Magnesium	ppm	ASTM D5185(m)	0	0	---	---
Calcium	ppm	ASTM D5185(m)	8	5	---	---
Phosphorus	ppm	ASTM D5185(m)	1325	1352	---	---
Zinc	ppm	ASTM D5185(m)	6	7	---	---
Sulfur	ppm	ASTM D5185(m)	2400	2350	---	---
Lithium	ppm	ASTM D5185(m)		<1	---	---



CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>15	5	---	---
Sodium	ppm	ASTM D5185(m)		1	---	---
Potassium	ppm	ASTM D5185(m)	>20	<1	---	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*		0	---	---
Nitration	Abs/cm	ASTM D7624*		4.9	---	---
Sulfation	Abs/.1mm	ASTM D7415*		156.9	---	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414*		150.9	---	---



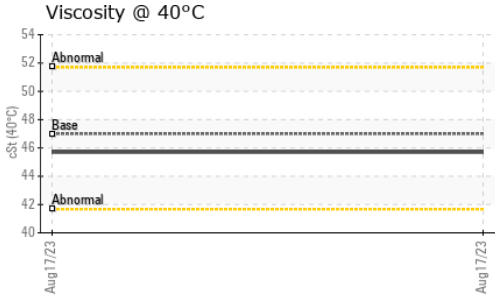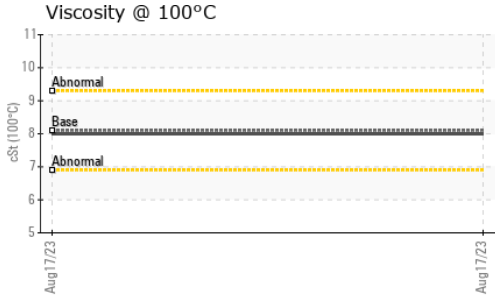

OIL ANALYSIS REPORT






VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Precipitate	scalar	Visual*	NONE	NONE	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D7279(m)	47.0	45.7	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	8.1	8	---	---
Viscosity Index (VI)	Scale	ASTM D2270*	145	147	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color					no image	no image
Bottom					no image	no image

GRAPHS

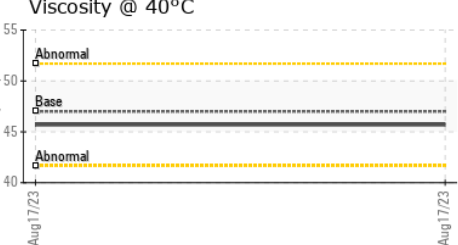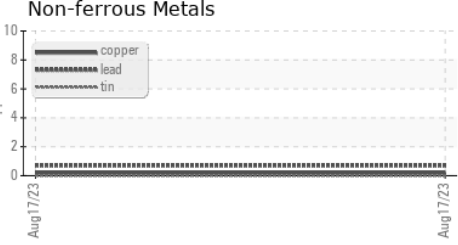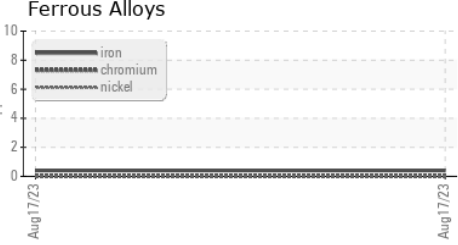

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC
Lab Number : 02576968
Unique Number : 5630028
Test Package : TEST (Additional Tests: FT-IR, ICP, KV100, KV40, VI)

SINTO INC
 3750, 14 AVE WEST
 SAINT-GEORGES DE BEAUCES, QC
 CA G5Y 8E3
 Contact: Hughes Giroux
 h.giroux@sinto.ca
 T: 1(800)463-0025
 F: (418)228-5592

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.