

OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id [C-GHOH] AIRBUS HELECOPTERS AS350B2 C-GHOH (S/N 3597)

Jet Turbine

MOBIL JET OIL 254 (6 LTR)

DIACNOSIS

Recommendation

Resample at the next service interval to monitor. (Customer Sample Comment: Scheduled 150 HR sample taken early for maintenance convenience.)

Wear

All component wear rates are normal. The direct-reading & analytical ferrographic results are normal indicating no abnormal wear in the system.

Contaminants

The water content is negligible. There is no indication of any contamination in the oil.

Oil Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		<u> </u>		Aug2023		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0722613		
Sample Date		Client Info		16 Aug 2023		
TSN	hrs	Client Info		12113		
TSO	hrs	Client Info		12113		
Oil Age	hrs	Client Info		118		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
WEAR METALS		method	limit/base	current	history1	history2

Sample Status				NORWAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>8	<1		
Chromium	ppm	ASTM D5185(m)	>2	0		
Nickel	ppm	ASTM D5185(m)	>2	<1		
Titanium	ppm	ASTM D5185(m)	>2	0		
Silver	ppm	ASTM D5185(m)	>2	<1		
Aluminum	ppm	ASTM D5185(m)	>2	0		
Lead	ppm	ASTM D5185(m)	>3	<1		
Copper	ppm	ASTM D5185(m)	>3	<1		
Tin	ppm	ASTM D5185(m)	>2	0		
Antimony	ppm	ASTM D5185(m)		0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	0	<1		
Barium	ppm	ASTM D5185(m)	0	0		
Molybdenum	ppm	ASTM D5185(m)	0	0		
Manganese	ppm	ASTM D5185(m)	0	0		
Magnesium	ppm	ASTM D5185(m)	0	<1		
Calcium	ppm	ASTM D5185(m)	0	<1		
Phosphorus	ppm	ASTM D5185(m)	3000	3028		
Zinc	ppm	ASTM D5185(m)	0	14		

Phosphorus	ppm	ASTM D5185(m)	3000	3028		
Zinc	ppm	ASTM D5185(m)	0	14		
Sulfur	ppm	ASTM D5185(m)	0	13		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINANTS	3	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>8	<1		
Sodium	ppm	ASTM D5185(m)		<1		
Potassium	ppm	ASTM D5185(m)	>20	0		
Water	%	ASTM D6304*	>0.1	0.068		
ppm Water	ppm	ASTM D6304*	>1000	680.3		
FLUID DEGRADA	NOITA	method	limit/base	current	history1	history2


0.21

mg KOH/g ASTM D974* 0.08

Acid Number (AN)



OIL ANALYSIS REPORT

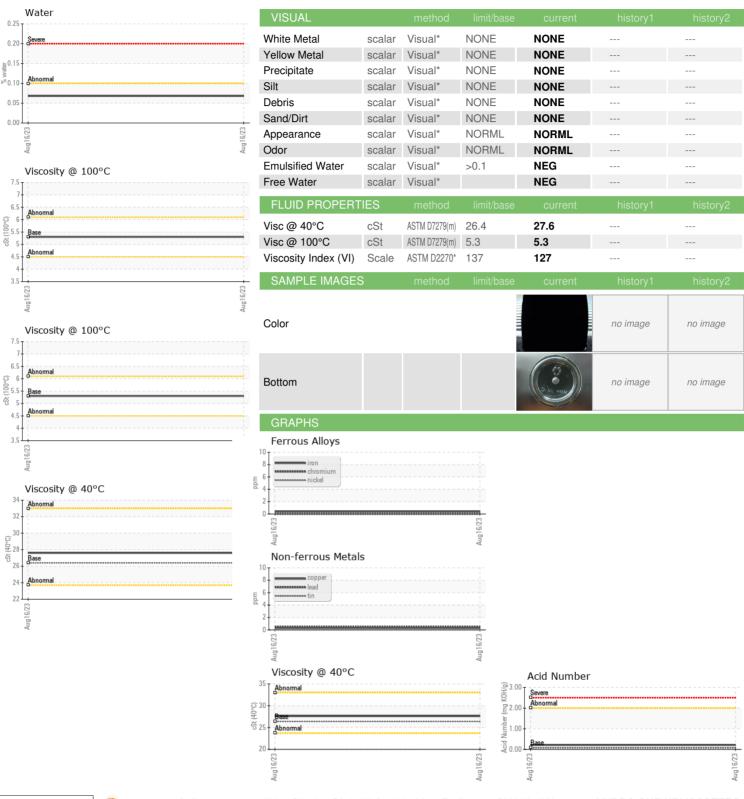





Laboratory

Laboratory Sample No. Lab Number **Unique Number**

Test Package : AVI 3

: WC0722613 : 02577160 : 5630220

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 Received Diagnosed

: 21 Aug 2023 : 23 Aug 2023 Diagnostician

: Kevin Marson

HYDRO ONE HELICOPTERS LAKE SIMCOE REGIONAL AIRPORT, 224 LINE 7 N.

ORO STATION, ON CA LOL 2E0

Contact: Ken Sanford ken.sanford@hydroone.com T: (705)487-1771

F: (705)487-5817

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.




FERROGRAPHY REPORT

[C-GHOH] AIRBUS HELECOPTERS AS350B2 C-GHOH (S/N 3597)

Jet Turbine

MOBIL JET OIL 254 (6 LTR)

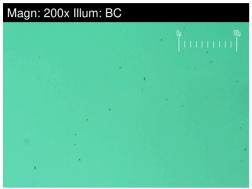






DR-FERROGRAP	ΉY	method	limit/base	current	history1	history2
Large Particles		DR-Ferr*		1.0		
Small Particles		DR-Ferr*		0.8		
Total Particles		DR-Ferr*	>	1.8		
Large Particles Percentage	%	DR-Ferr*		11.1		
Severity Index		DR-Ferr*		0		
FERROGRAPHY		method	limit/base	current	history1	history2
Ferrous Rubbing	Scale 0-10	ASTM D7684*		1		
Ferrous Sliding	Scale 0-10	ASTM D7684*				
Ferrous Cutting	Scale 0-10	ASTM D7684*				
Ferrous Rolling	Scale 0-10	ASTM D7684*		1		
Ferrous Break-in	Scale 0-10	ASTM D7684*				
Ferrous Spheres	Scale 0-10	ASTM D7684*				
Ferrous Black Oxides	Scale 0-10	ASTM D7684*				
Ferrous Red Oxides	Scale 0-10	ASTM D7684*				
Ferrous Corrosive	Scale 0-10	ASTM D7684*				
Ferrous Other	Scale 0-10	ASTM D7684*				
Nonferrous Rubbing	Scale 0-10	ASTM D7684*				
Nonferrous Sliding	Scale 0-10	ASTM D7684*				
Nonferrous Cutting	Scale 0-10	ASTM D7684*				
Nonferrous Rolling	Scale 0-10	ASTM D7684*				
Nonferrous Other	Scale 0-10	ASTM D7684*				
Carbonaceous Material	Scale 0-10	ASTM D7684*				
Lubricant Degradation	Scale 0-10	ASTM D7684*				
Sand/Dirt	Scale 0-10	ASTM D7684*		1		
Fibres	Scale 0-10	ASTM D7684*		1		
Spheres	Scale 0-10	ASTM D7684*				
Other	Scale 0-10	ASTM D7684*		1		

WEAR

All component wear rates are normal. The direct-reading & analytical ferrographic results are normal indicating no abnormal wear in the system.

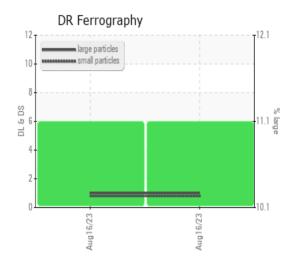

This page left intentionally blank