




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

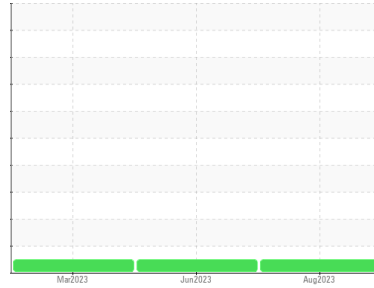

Area  
**[96970]**  
 Machine Id  
**FREEZER #5 EXTERNAL**

Component  
**Gearbox**  
 Fluid  
**PETRO CANADA ENDURATEX EP 460 (6 LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0829259</b>	WC0789528	WC0789501
Sample Date	Client Info		<b>18 Aug 2023</b>	12 Jun 2023	19 Mar 2023
Machine Age	hrs	Client Info	<b>0</b>	0	0
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	Not Chngd	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184*		<b>0</b>	0	0
Iron	ppm	ASTM D5185(m) >200	<b>6</b>	7	9
Chromium	ppm	ASTM D5185(m) >10	<b>0</b>	0	0
Nickel	ppm	ASTM D5185(m) >10	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m) >25	<b>0</b>	0	0
Lead	ppm	ASTM D5185(m) >50	<b>0</b>	0	0
Copper	ppm	ASTM D5185(m) >200	<b>&lt;1</b>	0	0
Tin	ppm	ASTM D5185(m) >10	<b>0</b>	0	0
Antimony	ppm	ASTM D5185(m) >5	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 55	<b>&lt;1</b>	0	<1
Barium	ppm	ASTM D5185(m) 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m) 0	<b>0</b>	0	0
Manganese	ppm	ASTM D5185(m) 0	<b>0</b>	0	0
Magnesium	ppm	ASTM D5185(m) 2	<b>&lt;1</b>	0	<1
Calcium	ppm	ASTM D5185(m) 6	<b>2</b>	2	3
Phosphorus	ppm	ASTM D5185(m) 240	<b>525</b>	553	533
Zinc	ppm	ASTM D5185(m) 3	<b>2</b>	2	2
Sulfur	ppm	ASTM D5185(m) 10310	<b>624</b>	508	679
Lithium	ppm	ASTM D5185(m)	<b>1</b>	1	2

## CONTAMINANTS




	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >50	<b>3</b>	3	2
Sodium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Potassium	ppm	ASTM D5185(m) >20	<b>0</b>	0	0

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974* 0.5	<b>0.37</b>	0.40	0.45




# OIL ANALYSIS REPORT

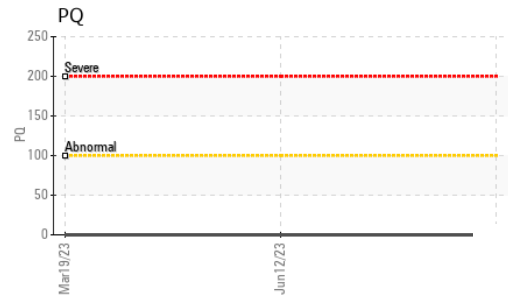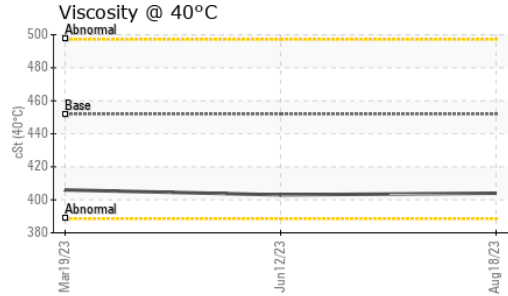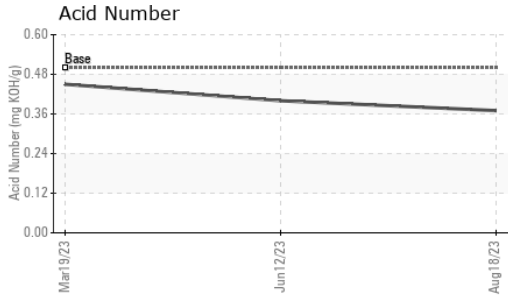






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	452	404	403

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

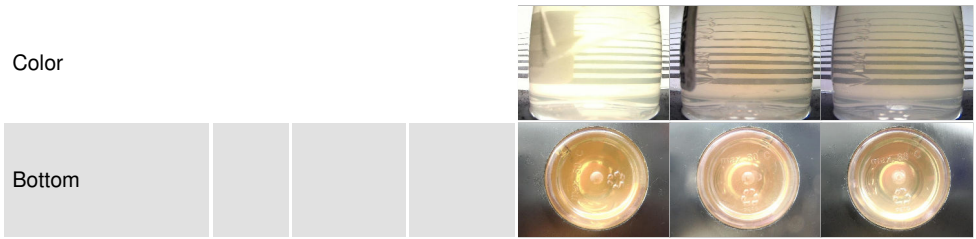

## GRAPHS

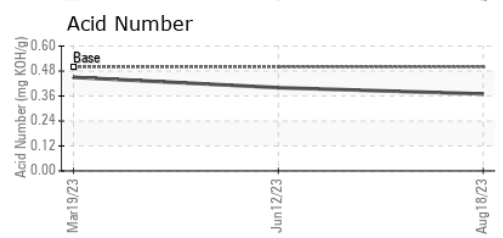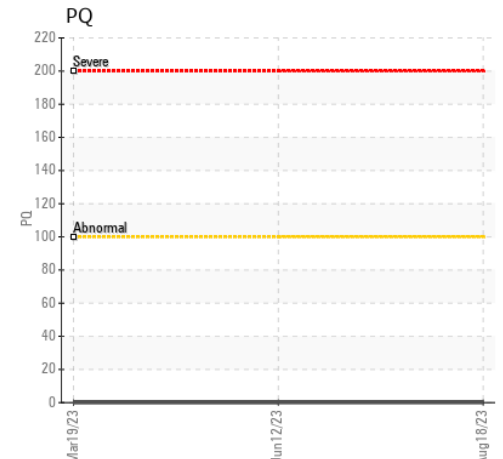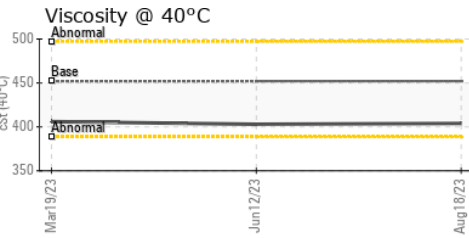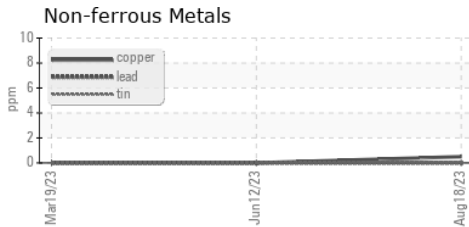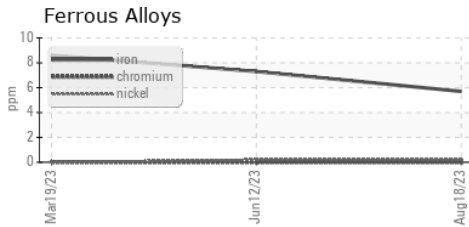

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0829259      **Received** : 21 Aug 2023  
**Lab Number** : 02577262      **Diagnosed** : 23 Aug 2023  
**Unique Number** : 5630322      **Diagnostician** : Wes Davis  
**Test Package** : IND 2

**GRAND RIVER FOODS**  
 190 VONDRAU DRIVE  
 CAMBRIDGE, ON  
 CA N3E 1B8  
 Contact: Ryan Shea  
 rshea@grandriverfoods.com  
 T: (519)653-3577  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.