



PROBLEM SUMMARY

Sample Rating Trend


VISCOSITY



Area
[CA-01-200091081]
 Machine Id
CA-1023800 (S/N 95503422)
 Component
Blower
 Fluid
MOBIL SHC 630 (--- GAL)



COMPONENT CONDITION SUMMARY

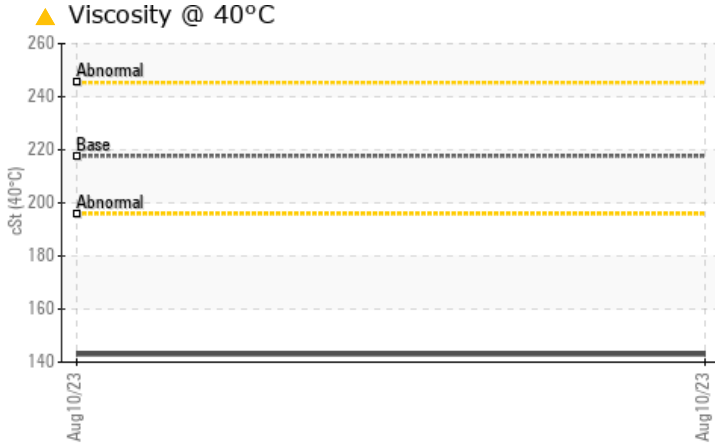

RECOMMENDATION

Confirm the source of the lubricant being utilized for top-up/fill. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

PROBLEMATIC TEST RESULTS

Sample Status				ABNORMAL	---	---
Zinc	ppm	ASTM D5185(m)		▲ 138	---	---
Sulfur	ppm	ASTM D5185(m)		▲ 5718	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	217.7	▲ 143	---	---

Customer Id: ARDMIS
 Sample No.: WC0651228
 Lab Number: 02577274
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Kevin Marson +1 (289)291-4644 x4644
Kevin.Marson@wearcheck.com

To change component or sample information:
 Gloria Gonzalez +1 (289)291-4643 x4643
gloria.gonzalez@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Information Required	---	---	?	NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.
Check Fluid Source	---	---	?	Confirm the source of the lubricant being utilized for top-up/fill.

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

Sample Rating Trend

VISCOSITY

Area
[CA-01-200091081]
 Machine Id
CA-1023800 (S/N 95503422)
 Component
Blower
 Fluid
MOBIL SHC 630 (--- GAL)



DIAGNOSIS

Recommendation

Confirm the source of the lubricant being utilized for top-up/fill. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

Viscosity of sample indicates oil is within ISO 150 range, advise investigate. This plus the additive levels indicates that this is not the same brand, or type of oil as reported. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	WC0651228	---	---
Sample Date	Client Info	10 Aug 2023	---	---
Machine Age	hrs Client Info	0	---	---
Oil Age	hrs Client Info	0	---	---
Oil Changed	Client Info	N/A	---	---
Sample Status		ABNORMAL	---	---

WEAR METALS

method	limit/base	current	history1	history2
PQ	ASTM D8184*	0	---	---
Iron	ppm ASTM D5185(m) >20	17	---	---
Chromium	ppm ASTM D5185(m) >20	0	---	---
Nickel	ppm ASTM D5185(m) >20	<1	---	---
Titanium	ppm ASTM D5185(m)	0	---	---
Silver	ppm ASTM D5185(m)	0	---	---
Aluminum	ppm ASTM D5185(m) >20	0	---	---
Lead	ppm ASTM D5185(m) >20	1	---	---
Copper	ppm ASTM D5185(m) >20	1	---	---
Tin	ppm ASTM D5185(m) >20	0	---	---
Antimony	ppm ASTM D5185(m)	0	---	---
Vanadium	ppm ASTM D5185(m)	0	---	---
Beryllium	ppm ASTM D5185(m)	0	---	---
Cadmium	ppm ASTM D5185(m)	0	---	---

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185(m)	2	---	---
Barium	ppm ASTM D5185(m)	0	---	---
Molybdenum	ppm ASTM D5185(m)	0	---	---
Manganese	ppm ASTM D5185(m)	2	---	---
Magnesium	ppm ASTM D5185(m)	3	---	---
Calcium	ppm ASTM D5185(m)	3	---	---
Phosphorus	ppm ASTM D5185(m)	283	---	---
Zinc	ppm ASTM D5185(m)	▲ 138	---	---
Sulfur	ppm ASTM D5185(m)	▲ 5718	---	---
Lithium	ppm ASTM D5185(m)	1	---	---

CONTAMINANTS




method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185(m) >15	1	---	---
Sodium	ppm ASTM D5185(m)	3	---	---
Potassium	ppm ASTM D5185(m) >20	<1	---	---

FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g ASTM D974*	0.43	---	---



OIL ANALYSIS REPORT

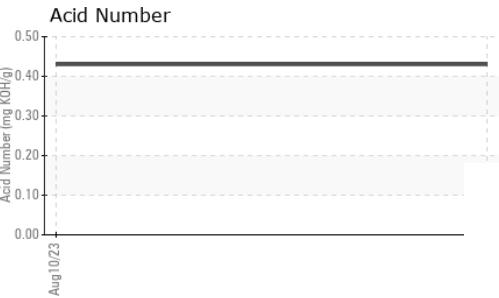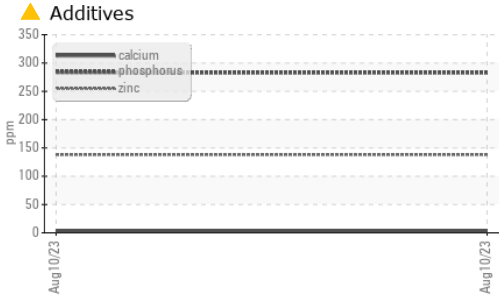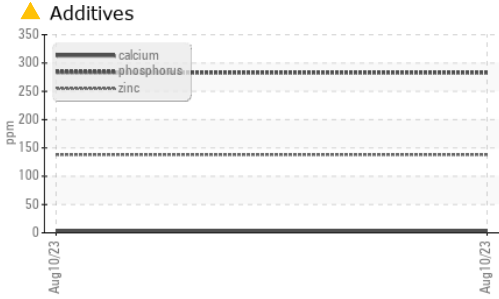






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	---
Emulsified Water	scalar	Visual*	NEG	---	---
Free Water	scalar	Visual*	NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	217.7 ▲ 143	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color		no image	no image
Bottom		no image	no image

GRAPHS

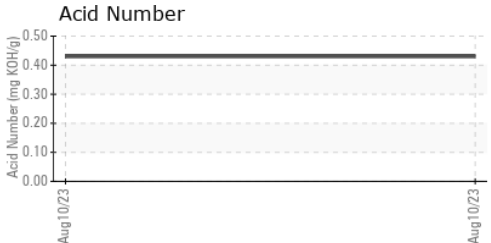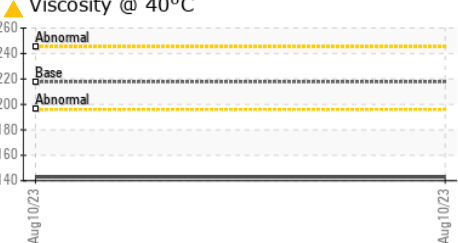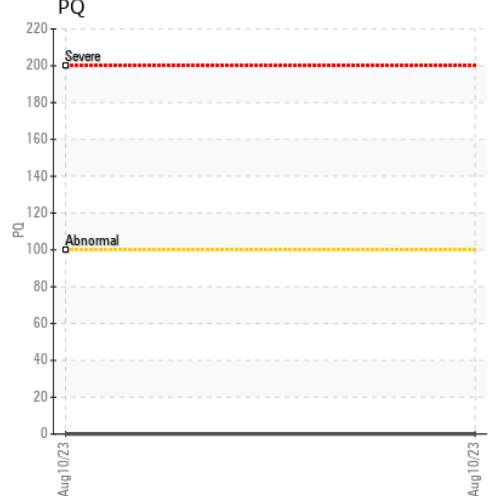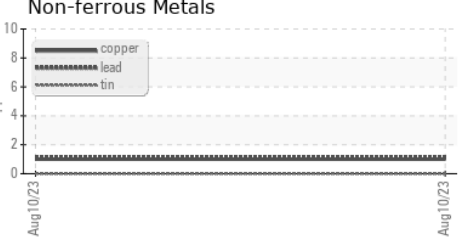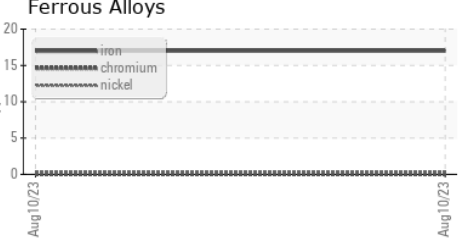

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0651228 **Received** : 21 Aug 2023
Lab Number : 02577274 **Diagnosed** : 23 Aug 2023
Unique Number : 5630334 **Diagnostician** : Kevin Marson
Test Package : IND 2

Ardent Mills-Mississauga
 27 REID DR.
 MISSISSAUGA, ON
 CA L5M 2B1
 Contact: Michael Deason
 michael.deason@ardentmills.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.