



# PROBLEM SUMMARY

Sample Rating Trend



ISO




Machine Id  
**SAW TABLE**

Component  
**Hydraulic System**

Fluid  
**AW HYDRAULIC OIL ISO 32 (--- GAL)**

## COMPONENT CONDITION SUMMARY

### ▲ Particle Trend

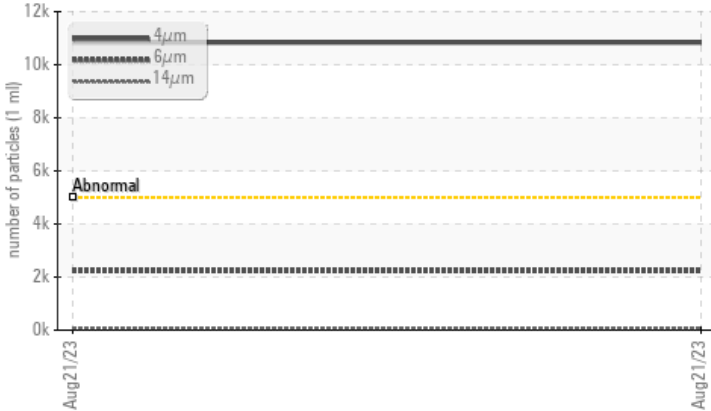

## RECOMMENDATION

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. We recommend you service the filters on this component. We recommend an early resample to monitor this condition. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) AW HYDRAULIC OIL ISO 32. Please confirm.

NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

## PROBLEMATIC TEST RESULTS

Sample Status			<b>ABNORMAL</b>	---	---
Particles >4µm	ASTM D7647	>5000	<b>▲ 10835</b>	---	---
Particles >6µm	ASTM D7647	>1300	<b>▲ 2229</b>	---	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	<b>▲ 21/18/13</b>	---	---

Customer Id: WEL191WEL

Sample No.: WC0851647

Lab Number: 02577469

Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:

Wes Davis +1 905-569-8600 x223

[wesd@wearcheck.ca](mailto:wesd@wearcheck.ca)

To change component or sample information:

Gloria Gonzalez +1 (289)291-4643 x4643

[gloria.gonzalez@wearcheck.com](mailto:gloria.gonzalez@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Filter	---	---	?	We recommend you service the filters on this component.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Alert	---	---	?	Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment.
Information Required	---	---	?	NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

## HISTORICAL DIAGNOSIS



# OIL ANALYSIS REPORT

Sample Rating Trend



ISO



Machine Id  
**SAW TABLE**

Component  
**Hydraulic System**

Fluid  
**AW HYDRAULIC OIL ISO 32 (--- GAL)**

## DIAGNOSIS

### Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. We recommend you service the filters on this component. We recommend an early resample to monitor this condition. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) AW HYDRAULIC OIL ISO 32. Please confirm.

NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

### Wear

All component wear rates are normal.

### Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>WC0851647</b>	---	---
Sample Date	Client Info	<b>21 Aug 2023</b>	---	---
Machine Age	hrs	Client Info	<b>0</b>	---
Oil Age	hrs	Client Info	<b>0</b>	---
Oil Changed	Client Info	<b>N/A</b>	---	---
Sample Status		<b>ABNORMAL</b>	---	---

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >20	<b>1</b>	---
Chromium	ppm	ASTM D5185(m) >20	<b>0</b>	---
Nickel	ppm	ASTM D5185(m) >20	<b>0</b>	---
Titanium	ppm	ASTM D5185(m)	<b>0</b>	---
Silver	ppm	ASTM D5185(m)	<b>0</b>	---
Aluminum	ppm	ASTM D5185(m) >20	<b>&lt;1</b>	---
Lead	ppm	ASTM D5185(m) >20	<b>&lt;1</b>	---
Copper	ppm	ASTM D5185(m) >20	<b>9</b>	---
Tin	ppm	ASTM D5185(m) >20	<b>&lt;1</b>	---
Antimony	ppm	ASTM D5185(m)	<b>0</b>	---
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	---
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	---
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	---

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 5	<b>0</b>	---
Barium	ppm	ASTM D5185(m) 5	<b>0</b>	---
Molybdenum	ppm	ASTM D5185(m) 5	<b>0</b>	---
Manganese	ppm	ASTM D5185(m)	<b>0</b>	---
Magnesium	ppm	ASTM D5185(m) 25	<b>31</b>	---
Calcium	ppm	ASTM D5185(m) 200	<b>7</b>	---
Phosphorus	ppm	ASTM D5185(m) 300	<b>308</b>	---
Zinc	ppm	ASTM D5185(m) 370	<b>297</b>	---
Sulfur	ppm	ASTM D5185(m) 2500	<b>619</b>	---
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	---

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >15	<b>0</b>	---
Sodium	ppm	ASTM D5185(m)	<b>0</b>	---
Potassium	ppm	ASTM D5185(m) >20	<b>&lt;1</b>	---

## FLUID CLEANLINESS





method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	<b>▲ 10835</b>	---
Particles >6µm	ASTM D7647	>1300	<b>▲ 2229</b>	---
Particles >14µm	ASTM D7647	>160	<b>79</b>	---
Particles >21µm	ASTM D7647	>40	<b>12</b>	---
Particles >38µm	ASTM D7647	>10	<b>0</b>	---
Particles >71µm	ASTM D7647	>3	<b>0</b>	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	<b>▲ 21/18/13</b>	---

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974* 0.57	<b>0.41</b>	---



# OIL ANALYSIS REPORT

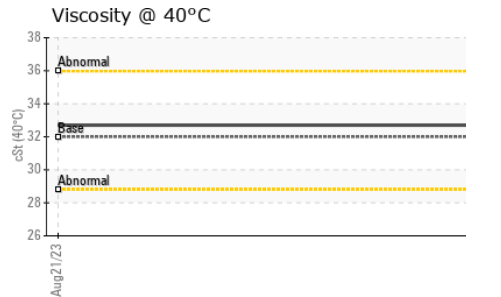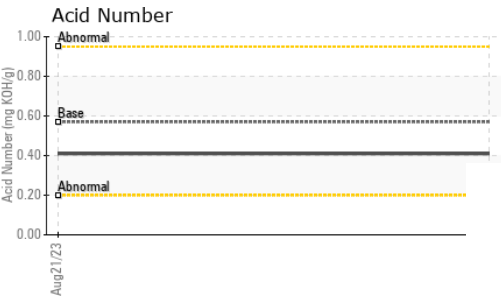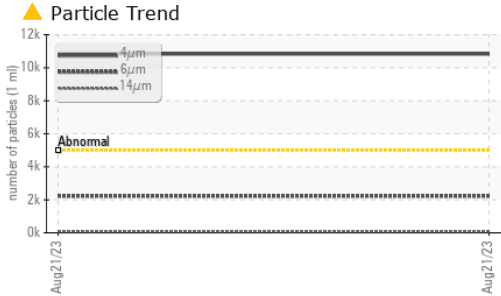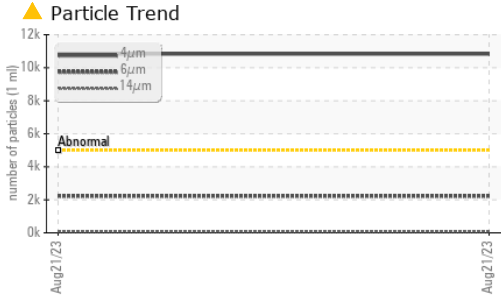






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	---
Silt	scalar	Visual*	NONE	VLITE	---
Debris	scalar	Visual*	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.05	NEG	---
Free Water	scalar	Visual*		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	32	32.7	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image
Bottom				no image	no image

### GRAPHS

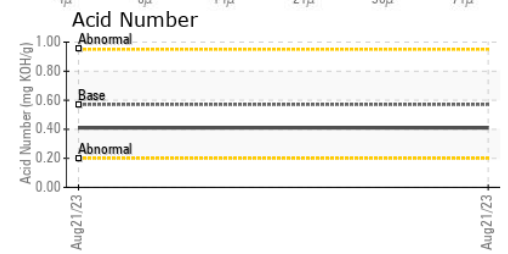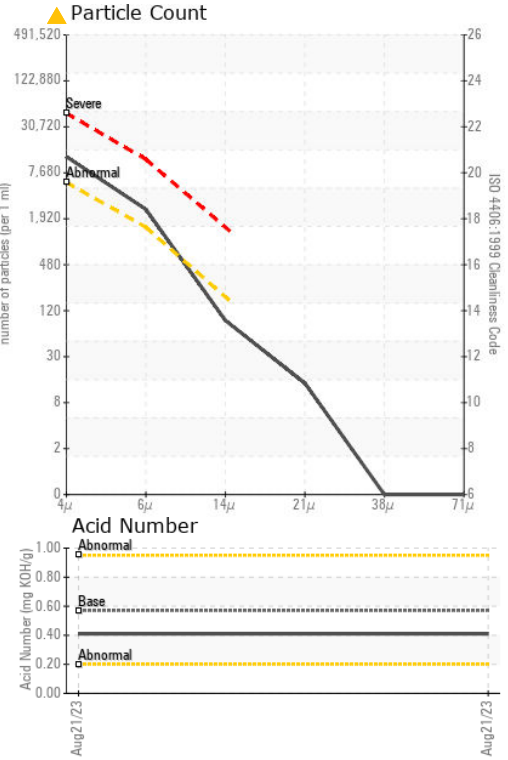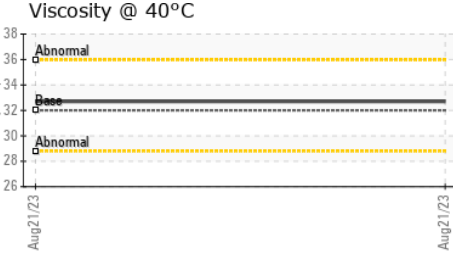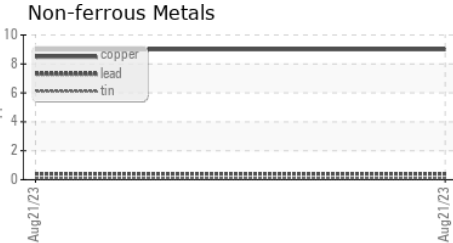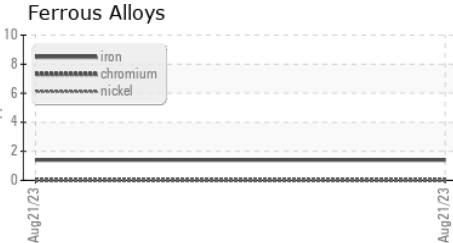

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0851647 **Received** : 22 Aug 2023  
**Lab Number** : 02577469 **Diagnosed** : 23 Aug 2023  
**Unique Number** : 5630529 **Diagnostician** : Wes Davis  
**Test Package** : IND 2

**Welded Tube of Canada**  
 191 Ridge Road  
 Welland, ON  
 CA L3B 5N7  
 Contact: Paul Ward  
 pward@weldedtube.com  
 T: (905)669-1111  
 F: (905)695-1504

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.