




# PROBLEM SUMMARY

Sample Rating Trend


ISO

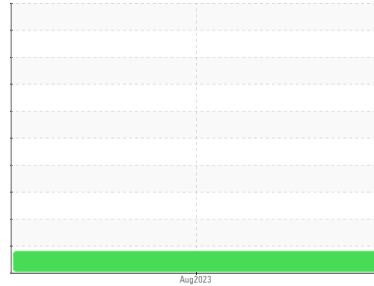

Area  
**Baytech - W00300 [PRESS 31]**  
Machine Id  
**A2308090**  
Component  
**Hydraulic System**  
Fluid  
**AW HYDRAULIC OIL ISO 46 (--- GAL)**

## COMPONENT CONDITION SUMMARY

### ▲ Particle Trend

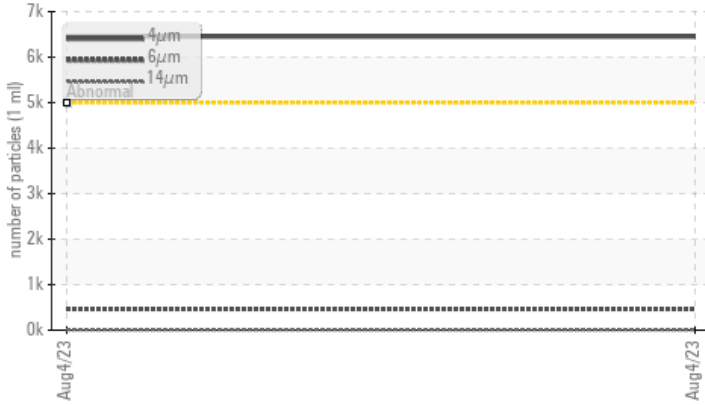

## RECOMMENDATION

This is a baseline read-out on the submitted sample.

## PROBLEMATIC TEST RESULTS

Sample Status			<b>ATTENTION</b>	---	---
Particles >4µm	ASTM D7647	>5000	▲ <b>6453</b>	---	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ <b>20/16/10</b>	---	---

Customer Id: CHECOB  
Sample No.: E30000118  
Lab Number: 02577476  
Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
Tatiana Sorkina +1 (800)263-3939  
[tsorkina@e360s.ca](mailto:tsorkina@e360s.ca)

To change component or sample information:  
Gloria Gonzalez +1 (289)291-4643 x4643  
[gloria.gonzalez@wearcheck.com](mailto:gloria.gonzalez@wearcheck.com)

## RECOMMENDED ACTIONS

*There are no recommended actions for this sample.*

## HISTORICAL DIAGNOSIS



# OIL ANALYSIS REPORT

Sample Rating Trend



ISO



Area  
**Baytech - W00300 [PRESS 31]**  
 Machine Id  
**A2308090**  
 Component  
**Hydraulic System**  
 Fluid  
**AW HYDRAULIC OIL ISO 46 (--- GAL)**

## DIAGNOSIS

### Recommendation

This is a baseline read-out on the submitted sample.

### Wear

{not applicable}

### Contamination

Particles >4µm and oil cleanliness are notably high.

### Fluid Condition

{not applicable}

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>E30000118</b>	---	---
Sample Date	Client Info	<b>04 Aug 2023</b>	---	---
Machine Age	hrs Client Info	<b>0</b>	---	---
Oil Age	hrs Client Info	<b>0</b>	---	---
Oil Changed	Client Info	<b>N/A</b>	---	---
Sample Status		<b>ATTENTION</b>	---	---

## WEAR METALS

method	limit/base	current	history1	history2
Iron ppm ASTM D5185(m)	>20	<b>13</b>	---	---
Chromium ppm ASTM D5185(m)	>20	<b>&lt;1</b>	---	---
Nickel ppm ASTM D5185(m)	>20	<b>&lt;1</b>	---	---
Titanium ppm ASTM D5185(m)		<b>0</b>	---	---
Silver ppm ASTM D5185(m)		<b>&lt;1</b>	---	---
Aluminum ppm ASTM D5185(m)	>20	<b>1</b>	---	---
Lead ppm ASTM D5185(m)	>20	<b>5</b>	---	---
Copper ppm ASTM D5185(m)	>20	<b>17</b>	---	---
Tin ppm ASTM D5185(m)	>20	<b>0</b>	---	---
Antimony ppm ASTM D5185(m)		<b>0</b>	---	---
Vanadium ppm ASTM D5185(m)		<b>0</b>	---	---
Beryllium ppm ASTM D5185(m)		<b>0</b>	---	---
Cadmium ppm ASTM D5185(m)		<b>&lt;1</b>	---	---

## ADDITIVES

method	limit/base	current	history1	history2
Boron ppm ASTM D5185(m)	5	<b>&lt;1</b>	---	---
Barium ppm ASTM D5185(m)	5	<b>&lt;1</b>	---	---
Molybdenum ppm ASTM D5185(m)	5	<b>&lt;1</b>	---	---
Manganese ppm ASTM D5185(m)		<b>1</b>	---	---
Magnesium ppm ASTM D5185(m)	25	<b>57</b>	---	---
Calcium ppm ASTM D5185(m)	200	<b>93</b>	---	---
Phosphorus ppm ASTM D5185(m)	300	<b>518</b>	---	---
Zinc ppm ASTM D5185(m)	370	<b>506</b>	---	---
Sulfur ppm ASTM D5185(m)	2500	<b>1981</b>	---	---
Lithium ppm ASTM D5185(m)		<b>&lt;1</b>	---	---






## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon ppm ASTM D5185(m)	>15	<b>5</b>	---	---
Sodium ppm ASTM D5185(m)		<b>2</b>	---	---
Potassium ppm ASTM D5185(m)	>20	<b>1</b>	---	---
Water % ASTM D6304*	>0.05	<b>0.012</b>	---	---
ppm Water ppm ASTM D6304*	>500	<b>125.6</b>	---	---

## FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm ASTM D7647	>5000	<b>▲ 6453</b>	---	---
Particles >6µm ASTM D7647	>1300	<b>466</b>	---	---
Particles >14µm ASTM D7647	>160	<b>9</b>	---	---
Particles >21µm ASTM D7647	>40	<b>3</b>	---	---
Particles >38µm ASTM D7647	>10	<b>1</b>	---	---
Particles >71µm ASTM D7647	>3	<b>0</b>	---	---
Oil Cleanliness ISO 4406 (c)	>19/17/14	<b>▲ 20/16/10</b>	---	---

# OIL ANALYSIS REPORT

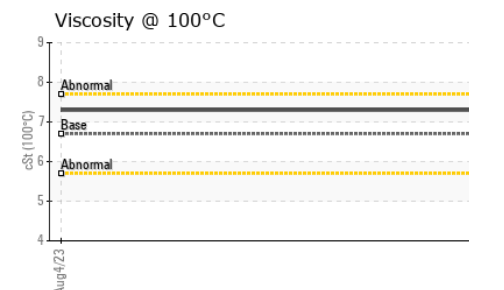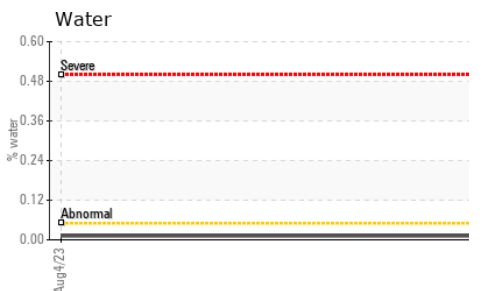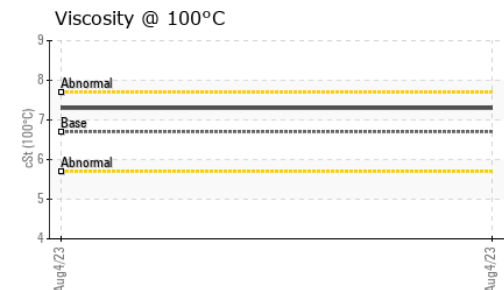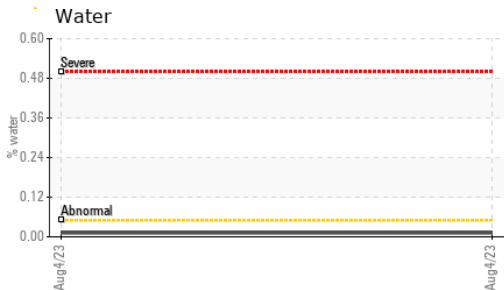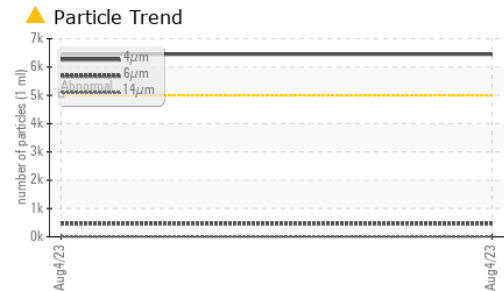





FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	0.57	<b>0.69</b>	---	---

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---
Precipitate	scalar	Visual*	NONE	<b>NONE</b>	---	---
Silt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Debris	scalar	Visual*	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	---	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	Visual*	>0.05	<b>NEG</b>	---	---
Free Water	scalar	Visual*		<b>NEG</b>	---	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	46	<b>47.5</b>	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	6.7	<b>7.3</b>	---	---
Viscosity Index (VI)	Scale	ASTM D2270*	97	<b>114</b>	---	---

SAMPLE IMAGES		method	limit/base	current	history1	history2
Color				no image	no image	
Bottom				no image	no image	

## GRAPHS

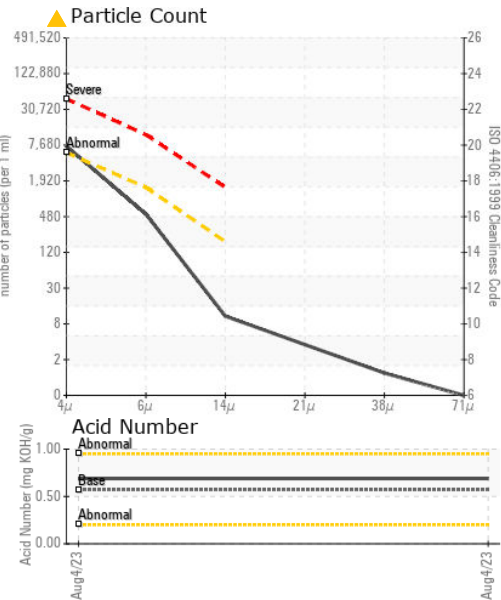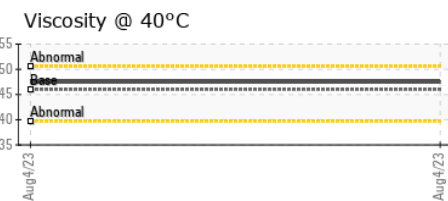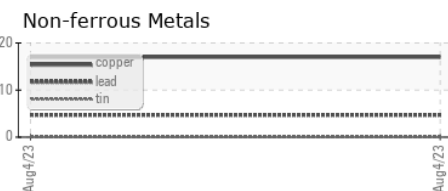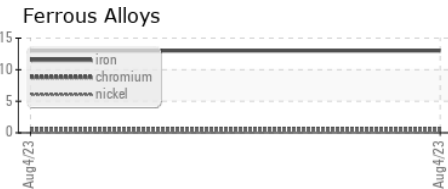

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : E3000118 **Received** : 22 Aug 2023  
**Lab Number** : **02577476** **Diagnosed** : 25 Aug 2023  
**Unique Number** : 5630536 **Diagnostician** : Tatiana Sorkina  
**Test Package** : IND 2 ( Additional Tests: KF, KV100, VI )

**Environmental 360 Solutions Ltd.**  
 640 Victoria Street  
 Cobourg, ON  
 CA K9A 5H5  
 Contact: Fred Kosseim  
 fkosseim@e360s.ca  
 T: (905)372-2251  
 F: (905)372-1658

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.