

OIL ANALYSIS REPORT

Core Molding - C16700 Machine Id M13301

Component Hydraulic System Fluid NOT GIVEN (--- GAL)

DIAGNOSIS

Recommendation

This is a baseline read-out on the submitted sample.


Wear

Copper and iron ppm levels are noted.

Contamination {not applicable}

Fluid Condition

{not applicable}






NORMAL


SAMPLE INFORM	1ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		E30000109		
Sample Date		Client Info		15 Aug 2023		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184*		0		
Iron	ppm	ASTM D5185(m)	>20	21		
Chromium	ppm	ASTM D5185(m)	>20	<1		
Nickel	ppm	ASTM D5185(m)	>20	<1		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)	>20	3		
Lead	ppm	ASTM D5185(m)	>20	3		
Copper	ppm	ASTM D5185(m)	>20	33		
Tin	ppm	ASTM D5185(m)	>20	<1		
Antimony	ppm	ASTM D5185(m)		0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		<1		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		0		
Barium	ppm	ASTM D5185(m)		<1		
Molybdenum	ppm	ASTM D5185(m)		0		
Manganese	ppm	ASTM D5185(m)		<1		
Magnesium	ppm	ASTM D5185(m)		12		
Calcium	ppm	ASTM D5185(m)		33		
Phosphorus	ppm	ASTM D5185(m)		899		
Zinc	ppm	ASTM D5185(m)		543		
Sulfur	ppm	ASTM D5185(m)		2709		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>15	10		
Sodium	ppm	ASTM D5185(m)		0		
Potassium	ppm	ASTM D5185(m)	>20	<1		
Water	%	ASTM D6304*	>0.05	0.002		
ppm Water	ppm	ASTM D6304*	>500	22.3		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	72		
Particles >6µm		ASTM D7647	>1300	26		
Particles >14µm		ASTM D7647	>160	4		
Particles >21µm		ASTM D7647	>40	2		
Particles >38μm		ASTM D7647	>10	0		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness 3:15:02) Bey: 1		ISO 4406 (c)	>19/17/14	13/12/9 Contact/Loc	ation: Fred Kos	seim - CHECOB

Contact/Location: Fred Kosseim - CHECOB




OIL ANALYSIS REPORT

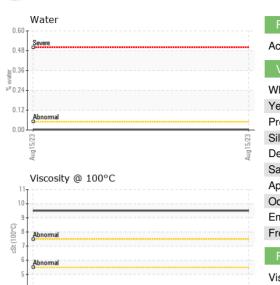

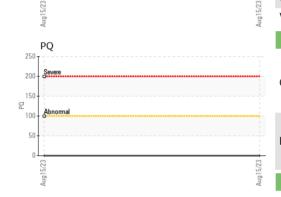

Particle Trend 6 Ê 5k 4 튠 31 21 Ωk Aug15/23 Aug15/23 Viscosity @ 40°C 7 70 65 () 60 (40°C) रहे ₅₀ Ab 45 40 Abnorma 35




20

Aug15/23

Ab

Aug15/23 -

FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*		0.67		
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE		
Yellow Metal	scalar	Visual*	NONE	NONE		
Precipitate	scalar	Visual*	NONE	NONE		
Silt	scalar	Visual*	NONE	NONE		
Debris	scalar	Visual*	NONE	NONE		
Sand/Dirt	scalar	Visual*	NONE	NONE		
Appearance	scalar	Visual*	NORML	NORML		
Odor	scalar	Visual*	NORML	NORML		
Emulsified Water	scalar	Visual*	>0.05	NEG		
Free Water	scalar	Visual*		NEG		
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)		70.8		
Visc @ 100°C	cSt	ASTM D7279(m)		9.5		
Viscosity Index (VI)	Scale	ASTM D2270*		112		
SAMPLE IMAGES		method	limit/base	current	history1	history2
Color					no image	no image
Bottom					no image	no image
GRAPHS						

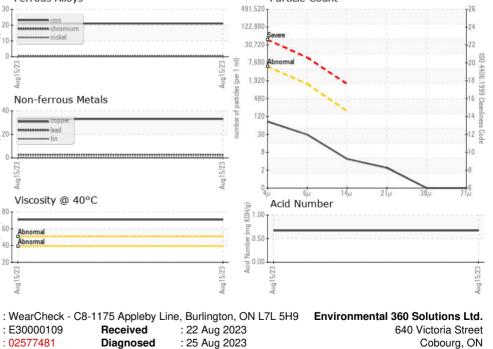

: 5630541 Diagnostician : Tatiana Sorkina Test Package : IND 2 (Additional Tests: KF, KV100, PQ, VI) Contact: Fred Kosseim To discuss this sample report, contact Customer Service at 1-800-268-2131. fkosseim@e360s.ca Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. T: (905)372-2251 Validity of results and interpretation are based on the sample and information as supplied. F: (905)372-1658

CA K9A 5H5