



OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Area
[61271]
 Machine Id
VOLVO VNL 4437

Component
Diesel Engine
 Fluid
PETRO CANADA DURON SAE 10W30 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0831171	---	---
Sample Date	Client Info		18 Aug 2023	---	---
Machine Age	kms	Client Info	673642	---	---
Oil Age	kms	Client Info	0	---	---
Oil Changed	Client Info		Changed	---	---
Sample Status			NORMAL	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>6.0	<1.0	---	---

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>100	74	---	---
Chromium	ppm	ASTM D5185(m)	>20	2	---	---
Nickel	ppm	ASTM D5185(m)	>2	1	---	---
Titanium	ppm	ASTM D5185(m)		<1	---	---
Silver	ppm	ASTM D5185(m)	>2	<1	---	---
Aluminum	ppm	ASTM D5185(m)	>25	8	---	---
Lead	ppm	ASTM D5185(m)	>40	2	---	---
Copper	ppm	ASTM D5185(m)	>330	11	---	---
Tin	ppm	ASTM D5185(m)	>15	2	---	---
Antimony	ppm	ASTM D5185(m)		0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
Beryllium	ppm	ASTM D5185(m)		0	---	---
Cadmium	ppm	ASTM D5185(m)		0	---	---

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	1	2	---	---
Barium	ppm	ASTM D5185(m)	1	0	---	---
Molybdenum	ppm	ASTM D5185(m)	1	58	---	---
Manganese	ppm	ASTM D5185(m)	1	1	---	---
Magnesium	ppm	ASTM D5185(m)	10	913	---	---
Calcium	ppm	ASTM D5185(m)	2942	1174	---	---
Phosphorus	ppm	ASTM D5185(m)	1102	995	---	---
Zinc	ppm	ASTM D5185(m)	1351	1167	---	---
Sulfur	ppm	ASTM D5185(m)	3903	2003	---	---
Lithium	ppm	ASTM D5185(m)		<1	---	---

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>25	9	---	---
Sodium	ppm	ASTM D5185(m)		4	---	---
Potassium	ppm	ASTM D5185(m)	>20	6	---	---
Glycol	%	ASTM D7922*		0.0	---	---

INFRA-RED



	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>3	0.9	---	---
Nitration	Abs/cm	ASTM D7624*	>20	14.0	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	28.7	---	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	ASTM D7414*	>25	26.3	---	---











OIL ANALYSIS REPORT

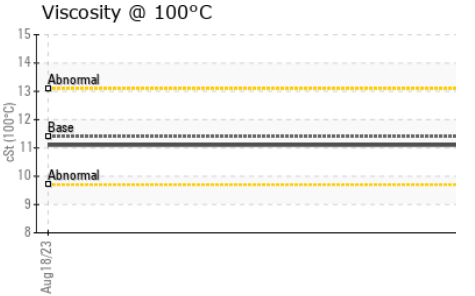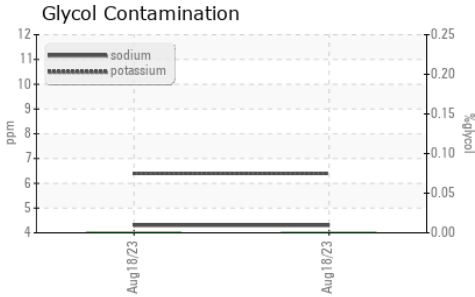

VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	---
Free Water	scalar	Visual*		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	11.4	11.1	---

GRAPHS

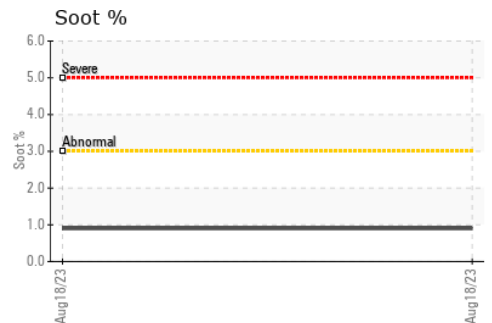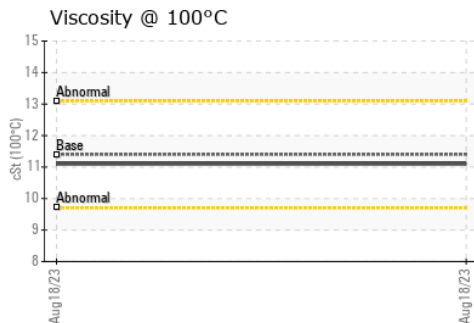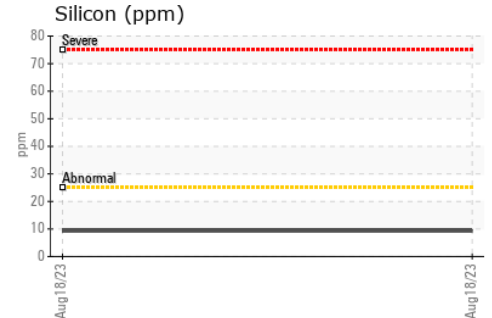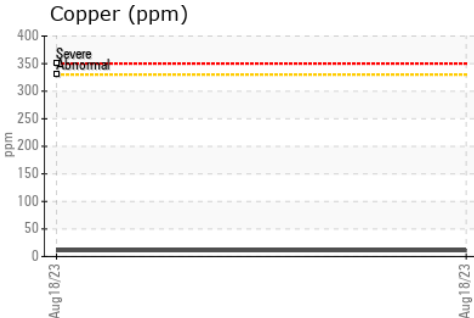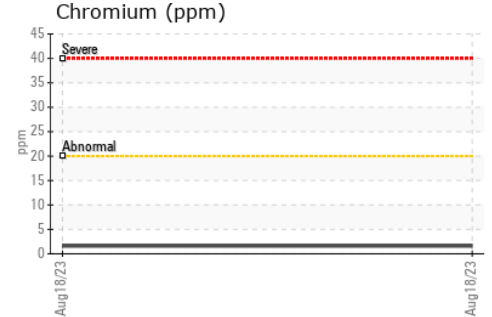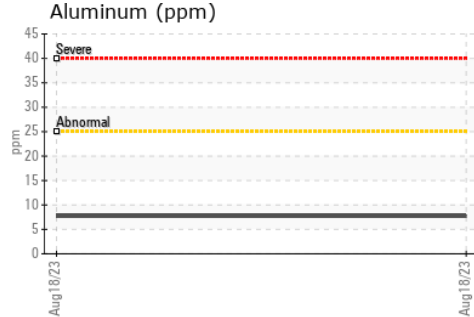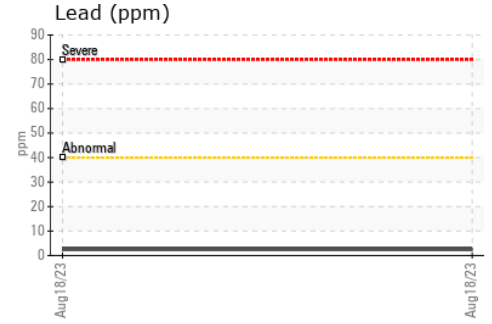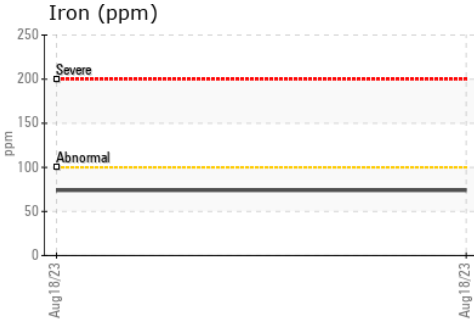

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 PERFORMANCE EQUIPMENT - VISION TRUCK
Sample No. : WC0831171 **Received** : 23 Aug 2023
Lab Number : 02577648 **Diagnosed** : 23 Aug 2023
Unique Number : 5630708 **Diagnostician** : Kevin Marson
Test Package : MOB 1 (Additional Tests: Glycol)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

415 EVANS AVENUE
 ETOBICOKE, ON
 CA M8W 0B3
 Contact: Service
 etobservice@visiontruckgroup.com
 T:
 F: