




OIL ANALYSIS REPORT

Sample Rating Trend

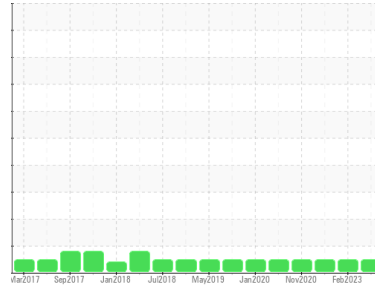

NORMAL



Area

Wide Cold Mill/Reduction Mill

Machine Id

80" REDUCTION MILL MOTOR LUBE (MILL OIL CELLAR) (WCM010) (S/N 1000005883)

Component

Lube System

Fluid

R&O OIL ISO 68 (850 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | WC0752302 | WC0752230 | WC0419570 |
| Sample Date | Client Info | | 22 Aug 2023 | 28 Feb 2023 | 29 Jan 2021 |
| Machine Age | hrs | Client Info | 0 | 0 | 0 |
| Oil Age | hrs | Client Info | 0 | 0 | 0 |
| Oil Changed | Client Info | | N/A | N/A | N/A |
| Sample Status | | | NORMAL | NORMAL | NORMAL |

WEAR METALS

| | method | limit/base | current | history1 | history2 |
|-----------|--------|---------------|---------|-----------|----------|
| Iron | ppm | ASTM D5185(m) | >20 | <1 | <1 |
| Chromium | ppm | ASTM D5185(m) | >20 | 0 | 0 |
| Nickel | ppm | ASTM D5185(m) | >20 | 0 | 0 |
| Titanium | ppm | ASTM D5185(m) | | 0 | 0 |
| Silver | ppm | ASTM D5185(m) | | 0 | <1 |
| Aluminum | ppm | ASTM D5185(m) | >20 | 0 | <1 |
| Lead | ppm | ASTM D5185(m) | >20 | 12 | 11 |
| Copper | ppm | ASTM D5185(m) | >20 | <1 | <1 |
| Tin | ppm | ASTM D5185(m) | >20 | 3 | 3 |
| Antimony | ppm | ASTM D5185(m) | | 0 | <1 |
| Vanadium | ppm | ASTM D5185(m) | | 0 | 0 |
| Beryllium | ppm | ASTM D5185(m) | | 0 | 0 |
| Cadmium | ppm | ASTM D5185(m) | | 0 | 0 |

ADDITIVES

| | method | limit/base | current | history1 | history2 |
|------------|--------|---------------|---------|------------|----------|
| Boron | ppm | ASTM D5185(m) | 5 | 0 | <1 |
| Barium | ppm | ASTM D5185(m) | 5 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185(m) | 5 | 0 | 0 |
| Manganese | ppm | ASTM D5185(m) | | 0 | 0 |
| Magnesium | ppm | ASTM D5185(m) | 5 | 0 | 0 |
| Calcium | ppm | ASTM D5185(m) | 5 | <1 | <1 |
| Phosphorus | ppm | ASTM D5185(m) | 100 | 5 | 4 |
| Zinc | ppm | ASTM D5185(m) | 25 | 3 | 2 |
| Sulfur | ppm | ASTM D5185(m) | 1500 | 130 | 139 |
| Lithium | ppm | ASTM D5185(m) | | <1 | <1 |

CONTAMINANTS

| | method | limit/base | current | history1 | history2 |
|-----------|--------|---------------|---------|----------|----------|
| Silicon | ppm | ASTM D5185(m) | >15 | <1 | <1 |
| Sodium | ppm | ASTM D5185(m) | | 2 | 2 |
| Potassium | ppm | ASTM D5185(m) | >20 | <1 | <1 |

FLUID CLEANLINESS

| | method | limit/base | current | history1 | history2 |
|-----------------|--------------|------------|-----------------|----------|----------|
| Particles >4µm | ASTM D7647 | >5000 | 233 | 3591 | 705 |
| Particles >6µm | ASTM D7647 | >1300 | 59 | 1199 | 187 |
| Particles >14µm | ASTM D7647 | >320 | 7 | 82 | 17 |
| Particles >21µm | ASTM D7647 | >80 | 3 | 24 | 4 |
| Particles >38µm | ASTM D7647 | >20 | 1 | 2 | 0 |
| Particles >71µm | ASTM D7647 | >4 | 0 | 0 | 0 |
| Oil Cleanliness | ISO 4406 (c) | >19/17/15 | 15/13/10 | 19/17/14 | 17/15/11 |


FLUID DEGRADATION

| | method | limit/base | current | history1 | history2 |
|------------------|----------|------------|---------|-------------|----------|
| Acid Number (AN) | mg KOH/g | ASTM D974* | 0.08 | 0.07 | 0.09 |




OIL ANALYSIS REPORT


Particle Trend

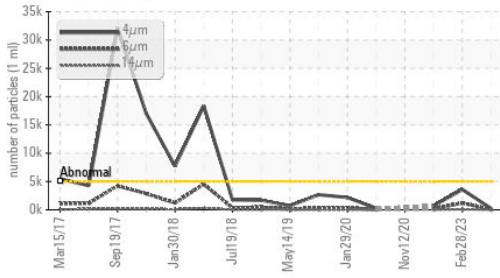


Acid Number

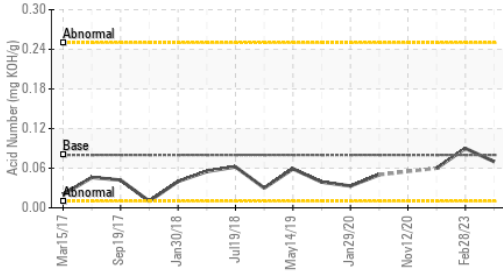

Viscosity @ 40°C

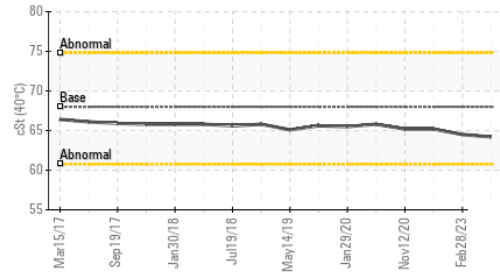


Particle Trend

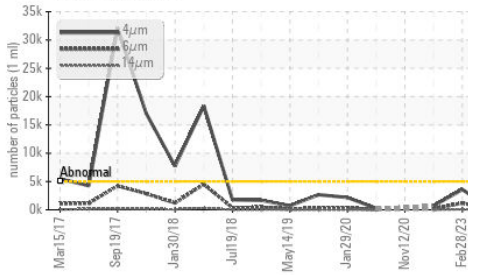






| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | Visual* | NONE | NONE | NONE |
| Yellow Metal | scalar | Visual* | NONE | NONE | NONE |
| Precipitate | scalar | Visual* | NONE | NONE | NONE |
| Silt | scalar | Visual* | NONE | NONE | NONE |
| Debris | scalar | Visual* | NONE | NONE | NONE |
| Sand/Dirt | scalar | Visual* | NONE | NONE | NONE |
| Appearance | scalar | Visual* | NORML | NORML | NORML |
| Odor | scalar | Visual* | NORML | NORML | NORML |
| Emulsified Water | scalar | Visual* | >0.05 | NEG | NEG |
| Free Water | scalar | Visual* | | NEG | NEG |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|---------------|---------|----------|----------|
| Visc @ 40°C | cSt | ASTM D7279(m) | 68 | 64.2 | 64.5 |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
|---------------|--------|------------|---------|----------|----------|

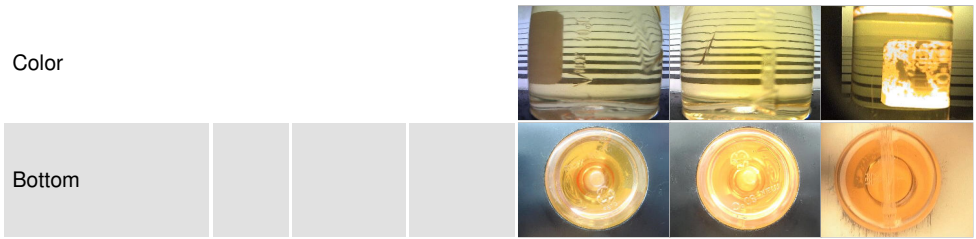

GRAPHS

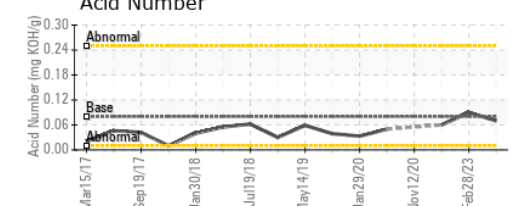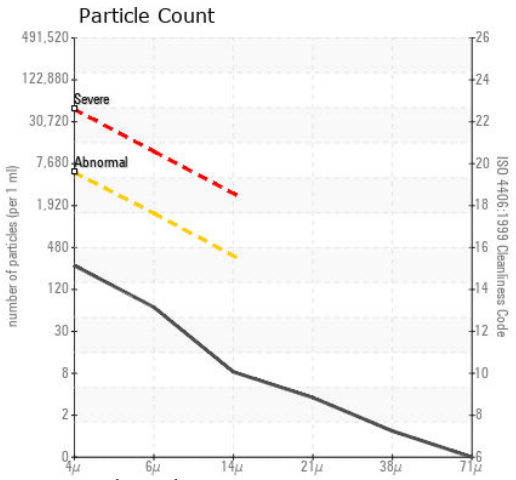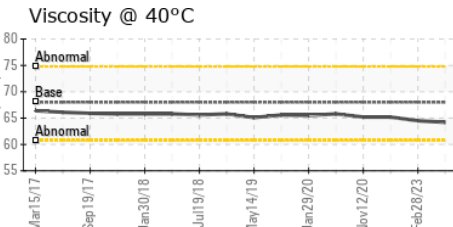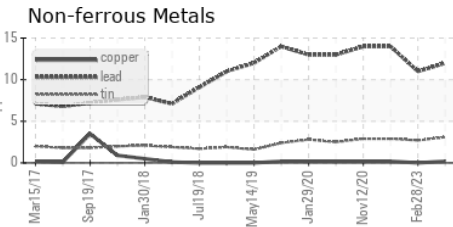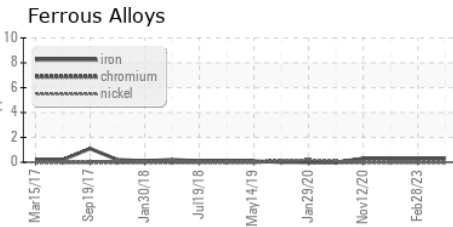

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **ALGOMA STEEL INC. - STORES DEPT.**
Sample No. : WC0752302 **Received** : 23 Aug 2023 **301 WALLACE TERRACE**
Lab Number : 02577738 **Diagnosed** : 24 Aug 2023 **SAULT STE MARIE, ON**
Unique Number : 5630798 **Diagnostician** : Wes Davis **CA P6C 1K8**
Test Package : IND 2 (Additional Tests: TAN Man) **Contact: Algoma Reliability**
algomareliability@algoma.com
 To discuss this sample report, contact Customer Service at 1-800-268-2131. **T: (705)206-1059**
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. **F: (705)945-3585**
 Validity of results and interpretation are based on the sample and information as supplied.