




# OIL ANALYSIS REPORT

Sample Rating Trend

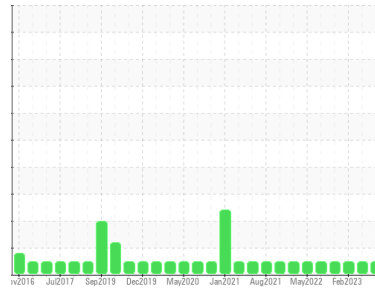

**NORMAL**



Machine Id  
**NOVA BUS 1610**

Component  
**Natural Gas Engine**

Fluid  
**VALVOLINE PREMIUM BLUE 9200 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0830277</b>	WC0791244	WC0767269
Sample Date	Client Info		<b>18 Aug 2023</b>	17 May 2023	12 Feb 2023
Machine Age	kms	Client Info	<b>0</b>	0	408083
Oil Age	kms	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >50	<b>11</b>	15	19
Chromium	ppm	ASTM D5185(m) >4	<b>&lt;1</b>	1	1
Nickel	ppm	ASTM D5185(m) >2	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185(m)	<b>&lt;1</b>	1	3
Silver	ppm	ASTM D5185(m) >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m) >9	<b>2</b>	2	2
Lead	ppm	ASTM D5185(m) >30	<b>1</b>	2	<1
Copper	ppm	ASTM D5185(m) >35	<b>1</b>	2	4
Tin	ppm	ASTM D5185(m) >4	<b>&lt;1</b>	<1	<1
Antimony	ppm	ASTM D5185(m)	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	<b>11</b>	10	10
Barium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	<b>53</b>	57	53
Manganese	ppm	ASTM D5185(m)	<b>&lt;1</b>	1	2
Magnesium	ppm	ASTM D5185(m)	<b>855</b>	875	791
Calcium	ppm	ASTM D5185(m)	<b>1272</b>	1438	1362
Phosphorus	ppm	ASTM D5185(m)	<b>729</b>	770	728
Zinc	ppm	ASTM D5185(m)	<b>905</b>	949	858
Sulfur	ppm	ASTM D5185(m)	<b>1970</b>	2088	1937
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	<1	<1

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >+100	<b>6</b>	7	9
Sodium	ppm	ASTM D5185(m)	<b>3</b>	5	5
Potassium	ppm	ASTM D5185(m) >20	<b>0</b>	0	<1

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	<b>0</b>	0	0
Nitration	Abs/cm	ASTM D7624* >20	<b>12.3</b>	13.5	10.1
Sulfation	Abs/.1mm	ASTM D7415* >30	<b>25.1</b>	24.9	21.7

## FLUID DEGRADATION


	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414* >25	<b>21.9</b>	22.6	16.7

## VISUAL

	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual* >0.1	<b>NEG</b>	NEG	NEG
Free Water	scalar	Visual*	<b>NEG</b>	NEG	NEG











# OIL ANALYSIS REPORT

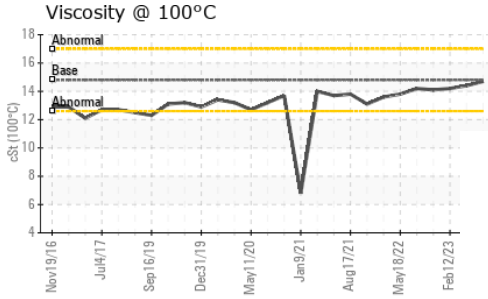

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	14.8	<b>14.7</b>	14.4	14.2

## GRAPHS

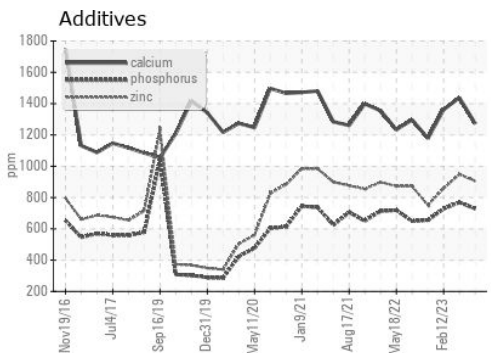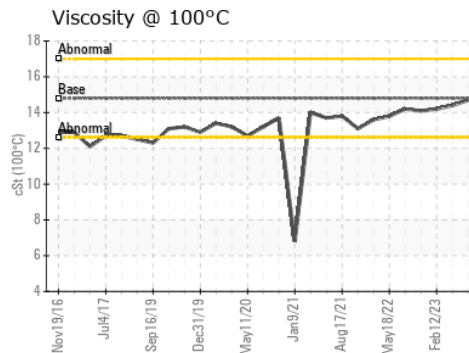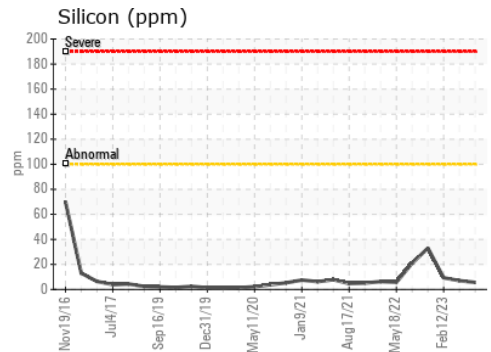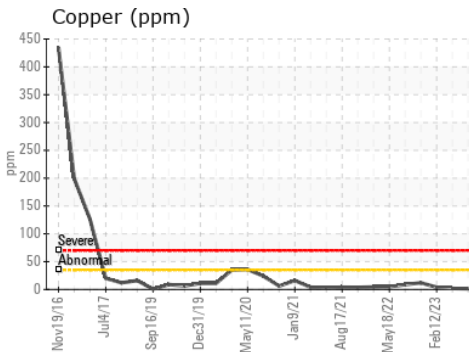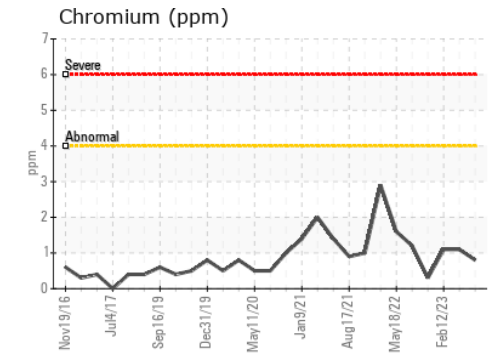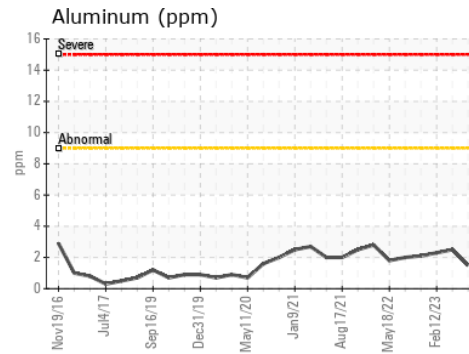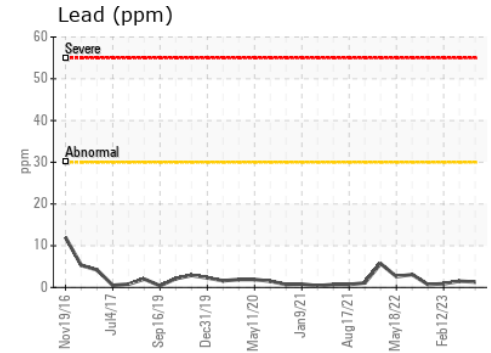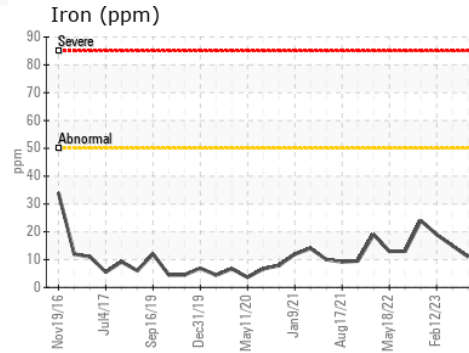

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0830277  
**Lab Number** : 02577986  
**Unique Number** : 5631046  
**Test Package** : MOB 1

**CITY OF HAMILTON**  
 2200 UPPER JAMES., MOUNTAIN TRANSIT STOREROOM  
 MOUNT HOPE, ON  
 CA L0R 1W0  
 Contact: Jeff Parr  
 jeff.parr@hamilton.ca  
 T: (905)546-2424  
 F: (905)679-4502

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.