

### **OIL ANALYSIS REPORT**



# FA6-6G1-TGB

#### Component Bearing Fluid PETRO CANADA TURBOFLO XL46 (--- GAL)

#### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

#### Wear

All component wear rates are normal.

#### Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.


#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

L)				Aug2023		
SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0785272		
Sample Date		Client Info		16 Aug 2023		
Machine Age	days	Client Info		1456		
Oil Age	days	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184*		0		
Iron	ppm	ASTM D5185(m)	>20	0		
Chromium	ppm	ASTM D5185(m)	>20	0		
Nickel	ppm	ASTM D5185(m)	>20	0		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)	>20	<1		
Lead	ppm	ASTM D5185(m)	>20	0		
Copper	ppm	ASTM D5185(m)	>20	3		
Tin	ppm	ASTM D5185(m)	>20	0		
Antimony	ppm	ASTM D5185(m)		0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<1		
Barium	ppm	ASTM D5185(m)		0		
Molybdenum	ppm	ASTM D5185(m)		0		
Manganese	ppm	ASTM D5185(m)		0		
Magnesium	ppm	ASTM D5185(m)		<1		
Calcium	ppm	ASTM D5185(m)		1		
Phosphorus	ppm	ASTM D5185(m)		14		
Zinc	ppm	ASTM D5185(m)	0	3		
Sulfur	ppm	ASTM D5185(m)		805		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>15	<1		
Sodium	ppm	ASTM D5185(m)		<1		
Potassium	ppm	ASTM D5185(m)	>20	0		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	2356		
Particles >6µm		ASTM D7647	>2500	549		
Particles >14µm		ASTM D7647	>160	25		
Particles >21µm		ASTM D7647	>40	3		
Particles >38µm		ASTM D7647	>10	1		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>20/18/14	18/16/12		



## **OIL ANALYSIS REPORT**

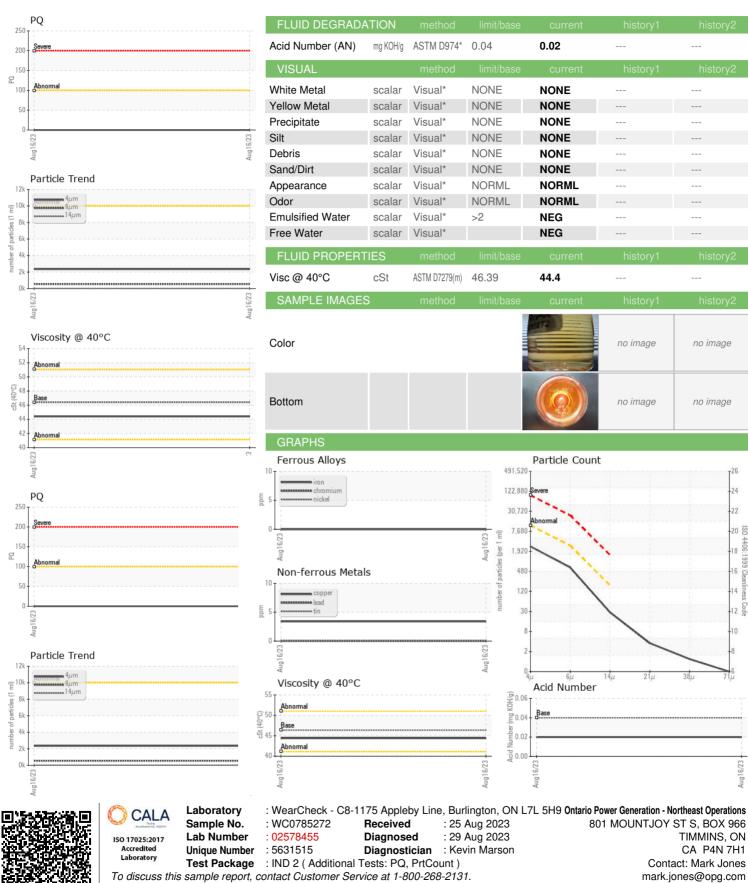

Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

Validity of results and interpretation are based on the sample and information as supplied.

801 MOUNTJOY ST S, BOX 966 TIMMINS, ON CA P4N 7H1 Contact: Mark Jones mark.jones@opg.com T: (705)267-7033 F: (705)267-5789

384

14

21

Contact/Location: Mark Jones - ONT801TIM

no image

no image

no image

no image

20 8

4406.

14