

### **OIL ANALYSIS REPORT**

Sample Rating Trend

NORMAL

# PETER LONG LOG LIFTER

Unknown Component Fluid ESSO UNIVIS EXTRA (--- GAL)

#### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

#### Wear

All component wear rates are normal.

#### Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the sample is suitable for further service.


				Jul2023		
SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0619014		
Sample Date		Client Info		27 Jul 2023		
Machine Age	days	Client Info		1102		
Oil Age	days	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184*		0		
Iron	ppm	ASTM D5185(m)		<1		
Chromium	ppm	ASTM D5185(m)		0		
Nickel	ppm	ASTM D5185(m)		0		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)		<1		
Lead	ppm	ASTM D5185(m)		0		
Copper	ppm	ASTM D5185(m)		4		
Tin	ppm	ASTM D5185(m)		0		
Antimony	ppm	ASTM D5185(m)		0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	2.9	<1		
Barium	ppm	ASTM D5185(m)	1.5	<1		
Molybdenum	ppm	ASTM D5185(m)	0	0		
Manganese	ppm	ASTM D5185(m)		0		
Magnesium	ppm	ASTM D5185(m)	0	2		
Calcium	ppm	ASTM D5185(m)	37	45		
Phosphorus	ppm	ASTM D5185(m)	235	376		
Zinc	ppm	ASTM D5185(m)	298	489		
Sulfur	ppm	ASTM D5185(m)	1069	1194		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)		8		
Sodium	ppm	ASTM D5185(m)		<1		
Potassium	ppm	ASTM D5185(m)	>20	0		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	3724		
Particles >6µm		ASTM D7647		347		
Particles >14µm		ASTM D7647	>160	11		
Particles >21µm		ASTM D7647		3		
Particles >38µm		ASTM D7647	>10	2		
Particles >71µm		ASTM D7647		1		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	19/16/11		



## **OIL ANALYSIS REPORT**





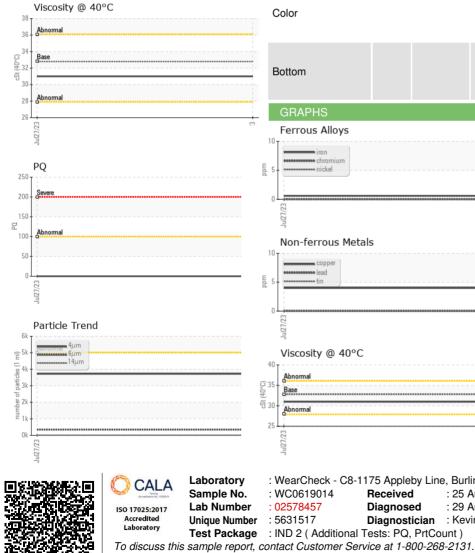

FLUID DEGRADA		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*		0.47		
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE		
Yellow Metal	scalar	Visual*	NONE	NONE		
Precipitate	scalar	Visual*	NONE	NONE		
Silt	scalar	Visual*	NONE	NONE		
Debris	scalar	Visual*	NONE	NONE		
Sand/Dirt	scalar	Visual*	NONE	NONE		
Appearance	scalar	Visual*	NORML	NORML		
Odor	scalar	Visual*	NORML	NORML		
Emulsified Water Free Water	scalar	Visual* Visual*		NEG NEG		
	scalar	_				
FLUID PROPERT		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	32.8	31.0		
SAMPLE IMAGES	S	method	limit/base	current	history1	history2
Color					no image	no image
Bottom					no image	no image
GRAPHS Ferrous Alloys			491,520 122,880 30,720	Severe		726 +24 -22
Non-ferrous Metal	S		ECUL27 CUL27 CUL27 Lad septited to tag to tag			-20 ISO 4466; 1999 -18 (1999 - 16 ) -16 (DeamInfress Code -14 (1995 - 16 ) -16 (DeamInfress Code -12 Code -10
Viscosity @ 40°C	*****			4μ 6μ Acid Number	14μ 21μ	
Abnormal Base Abnormal			(0,0.60 Bu) 0.40 Bu) 0.40 Wurper Science Scien	Jui27/23		
02578457	Received Diagnose Diagnost ests: PQ,	d : 25 / ed : 29 / ician : Kev PrtCount )	Aug 2023 Aug 2023 rin Marson		1 MOUNTJOY Contact:	lortheast Operations ST S, BOX 966 TIMMINS, ON CA P4N 7H1 Zane Lougheed heed@opg.com

Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

Validity of results and interpretation are based on the sample and information as supplied.

T:

F: