


PROBLEM SUMMARY

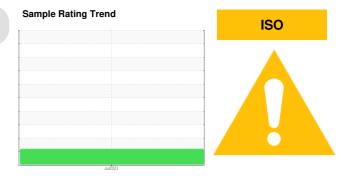

WAWAITIN WD LOG LIFTER

Unknown Component Fluid ESSO UNIVIS EXTRA (--- GAL)

COMPONENT CONDITION SUMMARY



RECOMMENDATION

We recommend you service the filters on this component. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

PROBLEMATIC TEST RESULTS									
Sample Status			ATTENTION						
Particles >4µm	ASTM D7647	>5000	<u> </u>						
Particles >6µm	ASTM D7647	>1300	🔺 1495						
Oil Cleanliness	ISO 4406 (c)	>19/17/14	<u> </u>						

Customer Id: ONT801TIM Sample No.: WC0618985 Lab Number: 02578477 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Kevin Marson +1 (289)291-4644 x4644 Kevin.Marson@wearcheck.com

To change component or sample information: Gloria Gonzalez +1 (289)291-4643 x4643 gloria.gonzalez@wearcheck.com

RECOMMENDED ACTIONS						
Action	Status	Date	Done By	Description		
Change Filter			?	We recommend you service the filters on this component.		
Information Required			?	NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.		

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

Sample Rating Trend

ISO

WAWAITIN WD LOG LIFTER

Component **Unknown Component** Fluic ESSO UNIVIS EXTRA (--- GAL)

DIAGNOSIS

Machine Id

Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

Wear

All component wear rates are normal.

Contamination

There is a light amount of silt (particulates < 14 microns in size) present in the sample.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the sample is suitable for further service.

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0618985		
Sample Date		Client Info		11 Jul 2023		
Machine Age	days	Client Info		1058		
Oil Age	days	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ATTENTION		
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184*		0		
Iron	000	ASTM D5185(m)		ں <1		
Chromium	ppm	ASTM D5185(m) ASTM D5185(m)		0		
	ppm	()				
Nickel	ppm	ASTM D5185(m)		<1		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)		0		
Lead	ppm	ASTM D5185(m)		0		
Copper	ppm	ASTM D5185(m)		3		
Tin	ppm	ASTM D5185(m)		0		
Antimony	ppm	ASTM D5185(m)		0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	2.9	0		
Barium	ppm	ASTM D5185(m)	1.5	<1		
Molybdenum	ppm	ASTM D5185(m)	0	0		
Manganese	ppm	ASTM D5185(m)		0		
Magnesium	ppm	ASTM D5185(m)	0	2		
Calcium	ppm	ASTM D5185(m)	37	46		
Phosphorus	ppm	ASTM D5185(m)	235	376		
Zinc	ppm	ASTM D5185(m)	298	487		
Sulfur	ppm	ASTM D5185(m)	1069	1169		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)		<1		
Sodium	ppm	ASTM D5185(m)		<1		
	ppm ppm	ASTM D5185(m) ASTM D5185(m)	>20	<1 <1		
Sodium	ppm		>20 limit/base			
Sodium Potassium FLUID CLEANLINI	ppm	ASTM D5185(m)	limit/base	<1 current		
Sodium Potassium FLUID CLEANLINI Particles >4µm	ppm	ASTM D5185(m) method ASTM D7647	limit/base >5000	<1 current ▲ 6530	 history1	 history2
Sodium Potassium FLUID CLEANLINI Particles >4µm Particles >6µm	ppm	ASTM D5185(m) method ASTM D7647 ASTM D7647	limit/base >5000 >1300	<1 current 6530 1495	 history1 	 history2
Sodium Potassium FLUID CLEANLINI Particles >4μm Particles >6μm Particles >14μm	ppm	ASTM D5185(m) method ASTM D7647 ASTM D7647 ASTM D7647	limit/base >5000 >1300 >160	<1 <u>current</u> 6530 1495 138	 history1 	 history2
Sodium Potassium FLUID CLEANLINI Particles >4µm Particles >6µm Particles >14µm Particles >21µm	ppm	ASTM D5185(m) method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	limit/base >5000 >1300 >160 >40	<1 current 6530 1495 138 37	 history1 	 history2
Sodium Potassium FLUID CLEANLINI Particles >4µm Particles >6µm Particles >14µm	ppm	ASTM D5185(m) method ASTM D7647 ASTM D7647 ASTM D7647	limit/base >5000 >1300 >160 >40 >10	<1 <u>current</u> 6530 1495 138	 history1 	 history2



P 0.1

0.00

38

36

0 € 32

30

28

26

250

200

150

100

50

2

٤Ē

Illul

PQ

š

Viscosity @ 40°C

OIL ANALYSIS REPORT

method


limit/base


current

history1

history2

FLUID DEGRADATION

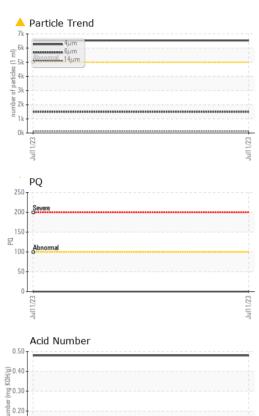

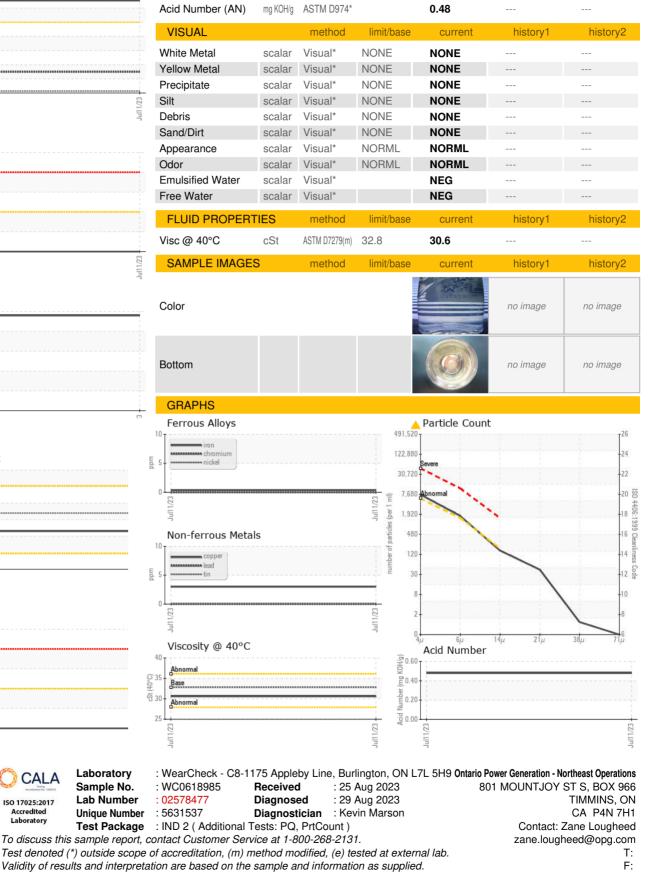

CALA

ISO 17025:2017 Accredited

Laboratory