


PROBLEM SUMMARY

LOWER STURGEON WD LOG LIFTER

Unknown Component Fluid ESSO UNIVIS EXTRA (--- GAL)

COMPONENT CONDITION SUMMARY

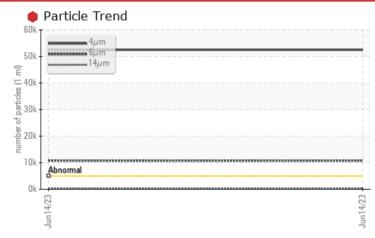

RECOMMENDATION

Check seals and/or filters for points of contaminant entry. The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. We recommend you service the filters on this component. Resample in 30-45 days to monitor this situation. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

PROBLEMATIC TEST RESULTS

Sample Status		SEVER	E	
Particles >4µm	ASTM D7647	>5000 🛑 5250		
Particles >6µm	ASTM D7647	>1300 🛑 1079	3	
Particles >14µm	ASTM D7647	>160 🔺 414		
Particles >21µm	ASTM D7647	>40 🔺 61		
Oil Cleanliness	ISO 4406 (c)	>19/17/14 🛑 23/2	1/16	


Customer Id: ONT801TIM Sample No.: WC0618983 Lab Number: 02578478 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Kevin Marson +1 (289)291-4644 x4644 Kevin.Marson@wearcheck.com

To change component or sample information: Gloria Gonzalez +1 (289)291-4643 x4643 <u>gloria.gonzalez@wearcheck.com</u>



RECOMMENDED AC	CTIONS			
Action	Status	Date	Done By	Description
Change Filter			?	We recommend you service the filters on this component.
Resample			?	Resample in 30-45 days to monitor this situation.
Information Required			?	NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.
Check Breathers			?	The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather.
Check Seals			?	Check seals and/or filters for points of contaminant entry.

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

Sample Rating Trend

ISO

 \mathbf{X}

LOWER STURGEON WD LOG LIFTER

Unknown Component Fluid ESSO UNIVIS EXTRA (--- GAL)

DIAGNOSIS

Recommendation

Check seals and/or filters for points of contaminant entry. The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. We recommend you service the filters on this component. Resample in 30-45 days to monitor this situation. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

Wear

All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the sample.

Fluid Condition


The AN level is acceptable for this fluid. The sample is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

				Jun2023		
SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0618983		
Sample Date		Client Info		14 Jun 2023		
Machine Age	days	Client Info		1007		
Oil Age	days	Client Info		0		
Oil Changed	,	Client Info		N/A		
Sample Status				SEVERE		
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184*		0		
Iron	ppm	ASTM D5185(m)		2		
Chromium	ppm	ASTM D5185(m)		0		
Nickel	ppm	ASTM D5185(m)		0		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)		<1		
Lead	ppm	ASTM D5185(m)		<1		
Copper	ppm	ASTM D5185(m)		7		
Tin	ppm	ASTM D5185(m)		0		
Antimony	ppm	ASTM D5185(m)		0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		ام م مال م مور				histow.0
NDDHIVE0		method	limit/base	current	history1	history2
	ppm	ASTM D5185(m)	2.9	current	history1	nistory∠
Boron	ppm ppm				history1 	
Boron Barium	ppm	ASTM D5185(m)	2.9	<1		
Boron		ASTM D5185(m) ASTM D5185(m)	2.9 1.5	<1 0		
Boron Barium Molybdenum Manganese	ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	2.9 1.5	<1 0 0		
Boron Barium Molybdenum Manganese	ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	2.9 1.5 0 0	<1 0 0 0		
Boron Barium Molybdenum Manganese Magnesium Calcium	ppm ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	2.9 1.5 0 0	<1 0 0 0 <1		
Boron Barium Molybdenum Manganese Magnesium	ppm ppm ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	2.9 1.5 0 0 37	<1 0 0 <1 47	 	
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus	ppm ppm ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	2.9 1.5 0 0 37 235	<1 0 0 <1 47 371	 	
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc	ppm ppm ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	2.9 1.5 0 0 37 235 298	<1 0 0 <1 47 371 487		
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	2.9 1.5 0 0 37 235 298	<1 0 0 <1 47 371 487 1253		
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	2.9 1.5 0 37 235 298 1069	<1 0 0 <1 47 371 487 1253 <1		
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m)	2.9 1.5 0 37 235 298 1069	<1 0 0 <1 47 371 487 1253 <1 <i>current</i>	 history1	 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	2.9 1.5 0 37 235 298 1069	<1 0 0 <1 47 371 487 1253 <1 <i>current</i>	 history1 	 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m)	2.9 1.5 0 37 235 298 1069 Iimit/base	<1 0 0 <1 47 371 487 1253 <1 Current <1 0	 history1	 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m)	2.9 1.5 0 0 37 235 298 1069 Imit/base	<1 0 0 4 1 47 371 487 1253 <1 Current 2 1 0 0 0	 history1	 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m)	2.9 1.5 0 37 235 298 1069 limit/base >20 limit/base	<1 0 0 4 4 7 3 7 1 4 8 7 1 2 5 3 <1 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	 history1 history1	 history2 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >6µm	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m)	2.9 1.5 0 2 37 235 298 1069 i mit/base >20 i mit/base >20 2 20 2 2 2 2 2 2 2 2 2 2 2 2 2	<1 0 0 (1 47 371 487 1253 <1 current (1 0 0 0 current 52507 10793	 history1 history1 	 history2 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m) ASTM D7647 ASTM D7647	2.9 1.5 0 2 37 235 298 1069 i i i i i i i i	<1 0 0 1 47 371 487 1253 <1 Current <1 0 0 Current 52507 ● 52507 ● 10793 ▲ 414	 history1 history1	 history2 history2 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >14µm Particles >21µm	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m) ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	2.9 1.5 0 37 235 298 1069 imit/base j j j j j j j j	<1 0 0 4 4 3 7 1 4 8 7 1 2 5 3 <1 4 8 7 1 2 5 3 <1 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	 history1 history1	 history2 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >4µm Particles >14µm Particles >21µm Particles >38µm	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m) ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	2.9 1.5 0 37 235 298 1069 imit/base >20 imit/base >5000 >1300 >160 >40 >10	<1 0 0 0 <1 47 371 487 1253 <1 Current <1 0 0 0 Current 52507 10793 414 61 1	 history1 history1	 history2 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m) ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	2.9 1.5 0 37 235 298 1069 imit/base >20 imit/base >5000 >1300 >160 >40 >10	<1 0 0 0 <1 47 371 487 1253 <1 Current <1 0 0 0 Current ↓ 52507 ↓ 10793 ↓ 414 ↓ 61	 history1 history1	 history2 history2 history2





OIL ANALYSIS REPORT

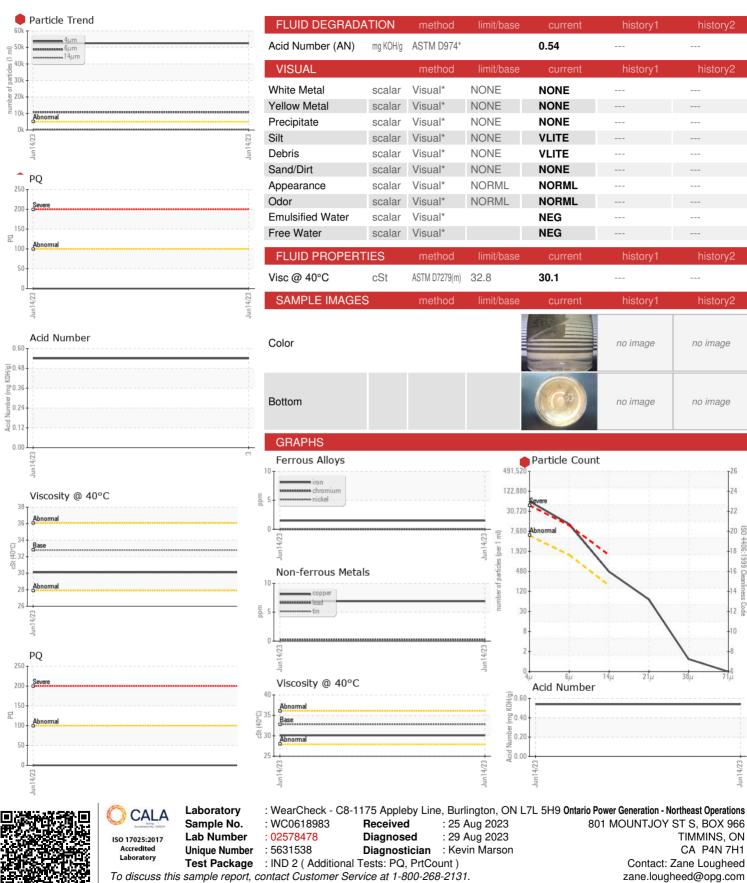

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

Validity of results and interpretation are based on the sample and information as supplied.

801 MOUNTJOY ST S, BOX 966 TIMMINS, ON CA P4N 7H1 Contact: Zane Lougheed zane.lougheed@opg.com T: F:

21µ

14

384

no image

no image

historv2

no image

no image

20 8

18

4/23