

OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id MESC LOG LIFTER Component

Unknown Component Fluid ESSO UNIVIS EXTRA (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition


The AN level is acceptable for this fluid. The condition of the sample is suitable for further service.


				Jul2023		
SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0619015		
Sample Date		Client Info		31 Jul 2023		
Machine Age	days	Client Info		1109		
Oil Age	days	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184*		0		
Iron	ppm	ASTM D5185(m)		<1		
Chromium	ppm	ASTM D5185(m)		0		
Nickel	ppm	ASTM D5185(m)		<1		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)		<1		
Lead	ppm	ASTM D5185(m)		0		
Copper	ppm	ASTM D5185(m)		1		
Tin	ppm	ASTM D5185(m)		0		
Antimony	ppm	ASTM D5185(m)		0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		<1		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	2.9	0		
Barium	ppm	ASTM D5185(m)	1.5	<1		
Molybdenum	ppm	ASTM D5185(m)	0	0		
Manganese	ppm	ASTM D5185(m)		0		
Magnesium	ppm	ASTM D5185(m)	0	<1		
Calcium	ppm	ASTM D5185(m)	37	45		
Phosphorus	ppm	ASTM D5185(m)	235	378		
Zinc	ppm	ASTM D5185(m)	298	495		
Sulfur	ppm	ASTM D5185(m)	1069	1418		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINANTS	5	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)		<1		
Sodium	ppm	ASTM D5185(m)		<1		
Potassium	ppm	ASTM D5185(m)	>20	<1		
FLUID CLEANLIN	NESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	288		
Particles >6µm		ASTM D7647	>1300	50		
Particles >14µm		ASTM D7647	>160	6		
Particles >21µm		ASTM D7647	>40	2		
Particles >38µm		ASTM D7647	>10	1		
Particles >71µm		ASTM D7647	>3	1		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	15/13/10		
		(*)				



OIL ANALYSIS REPORT





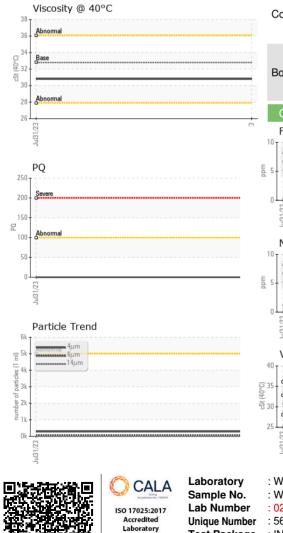

_	FLUID DEGRADATION		method limit/base		current		history2	
	Acid Number (AN)	mg KOH/g	ASTM D974*		0.56			
	VISUAL		method	limit/base	current	history1	history2	
_	White Metal	scalar	Visual*	NONE	NONE			
	Yellow Metal	scalar	Visual*	NONE	NONE			
	Precipitate	scalar	Visual*	NONE	NONE			
	Silt	scalar	Visual*	NONE	NONE			
	Debris	scalar	Visual*	NONE	NONE			
	Sand/Dirt	scalar	Visual*	NONE	NONE			
	Appearance	scalar	Visual*	NORML	NORML			
	Odor	scalar	Visual*	NORML	NORML			
	Emulsified Water	scalar	Visual*		NEG			
	Free Water	scalar	Visual*		NEG			
	FLUID PROPER	TIES	method	limit/base	current	history1	history2	
	Visc @ 40°C	cSt	ASTM D7279(m)	32.8	30.8			
	SAMPLE IMAGE	S	method	limit/base	current	history1	history2	
Jul31/23	Color					no image	no image	
	Bottom					no image	no image	
	GRAPHS							
53	Ferrous Alloys				Particle Count			
	10 iron 1			491,520	I		T ²	
	E 5-			122,880	Saura		-2	
				30,720			-2	
	٥Lj			7,680	Abnormal		-2	
				(per 1 ml) 1/23				
	131/2				4 28 2	•	+1	
	Jul31/23			cles (b	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	•	-1	
	Non-ferrous Meta	s		d) 1,520 480			-1	
	Non-ferrous Meta	s		d) 1.320 480 480		•	+1	
	Non-ferrous Meta	ls		of particles			-2 -1 -1 +1 +1 +1	
	Non-ferrous Meta	ls		a di 1,320 sepited 480 to ta 120 aquinu 30 8			+1 +1 +1 +1 +1 +1	
	Non-ferrous Meta	S						
	Non-ferrous Meta	5	******	8 2 2 2 2				
	Non-ferrous Meta	S		8 2 2 2 2 2 2		14μ 21μ		
	Non-ferrous Meta	S		8 2 2 2 2 2 2		14μ 21μ		
	Non-ferrous Meta	ls		8 2 2 2 2 2 2		14μ 21μ	-1	
	Non-ferrous Meta	S		8 2 2 2 2 2 2		14μ 21μ	-1	
	Non-ferrous Meta	ls		8 2 2 2 2 2 2		14μ 21μ	-1	
	Non-ferrous Meta	ls		8 8 2 2 1/1131/23		14μ 21μ		

To discuss this sample report, contact Customer Service at 1-800-268-2131. Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

zane.lougheed@opg.com

T:

F:

Page 2 of 2