




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

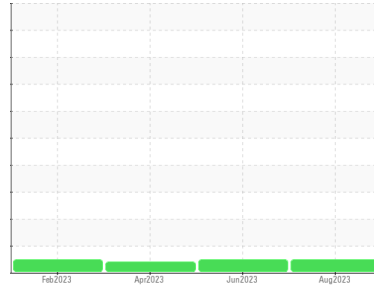

Machine Id
WESTERN STAR 307

Component
Diesel Engine

Fluid
KENDALL 10W30 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

Metal levels are typical for a new component breaking in.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0838806	WC0755299	WC0755295
Sample Date	Client Info			17 Aug 2023	07 Jun 2023	05 Apr 2023
Machine Age	kms	Client Info		16199	24049	4556
Oil Age	kms	Client Info		0	0	572
Oil Changed	Client Info			Changed	Changed	N/A
Sample Status				NORMAL	NORMAL	ABNORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method		>3.0	<1.0	<1.0	0.8
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>200	33	28	23
Chromium	ppm	ASTM D5185(m)	>20	1	1	1
Nickel	ppm	ASTM D5185(m)	>2	0	<1	0
Titanium	ppm	ASTM D5185(m)	>2	18	8	32
Silver	ppm	ASTM D5185(m)	>2	0	0	0
Aluminum	ppm	ASTM D5185(m)	>30	1	2	2
Lead	ppm	ASTM D5185(m)	>30	6	6	3
Copper	ppm	ASTM D5185(m)	>30	2	2	3
Tin	ppm	ASTM D5185(m)	>15	2	2	2
Antimony	ppm	ASTM D5185(m)		0	<1	<1
Vanadium	ppm	ASTM D5185(m)		<1	<1	<1
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		45	57	81
Barium	ppm	ASTM D5185(m)		0	0	0
Molybdenum	ppm	ASTM D5185(m)		59	59	47
Manganese	ppm	ASTM D5185(m)		<1	<1	<1
Magnesium	ppm	ASTM D5185(m)		123	87	209
Calcium	ppm	ASTM D5185(m)		2073	2240	2089
Phosphorus	ppm	ASTM D5185(m)		1061	1093	1107
Zinc	ppm	ASTM D5185(m)		1176	1186	1182
Sulfur	ppm	ASTM D5185(m)		3124	3123	3272
Lithium	ppm	ASTM D5185(m)		<1	<1	<1


CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>30	4	7	4
Sodium	ppm	ASTM D5185(m)		4	3	4
Potassium	ppm	ASTM D5185(m)	>20	2	2	2

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>3	1.2	1	0.6
Nitration	Abs/cm	ASTM D7624*	>20	9.8	9.5	9.0
Sulfation	Abs/.1mm	ASTM D7415*	>30	23.2	22.8	23.3

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414*	>25	15.8	16.8	15.1











OIL ANALYSIS REPORT

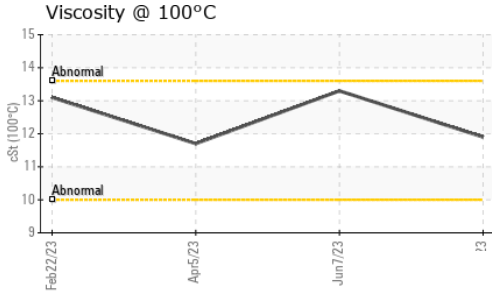

VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	11.9	13.3	▲ 11.7

GRAPHS

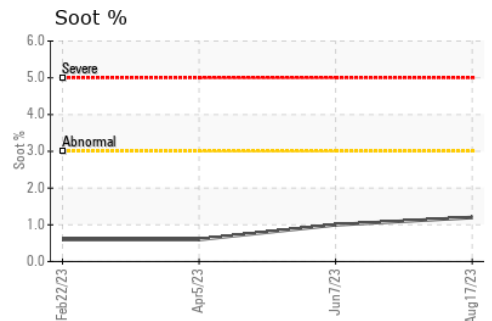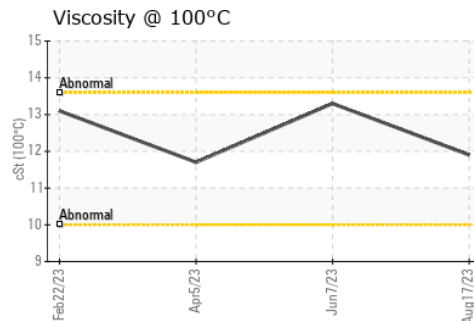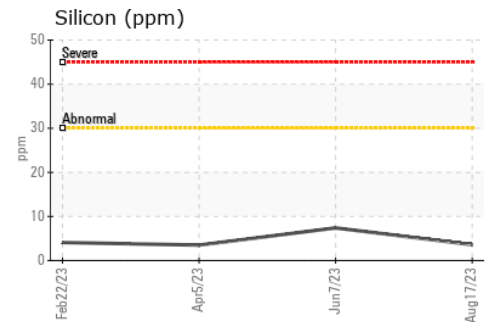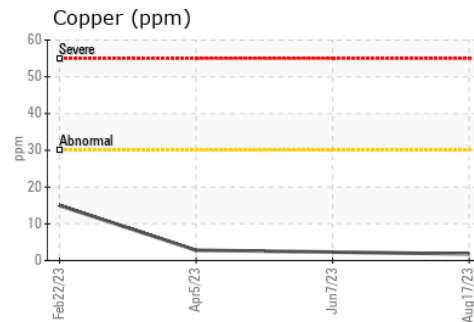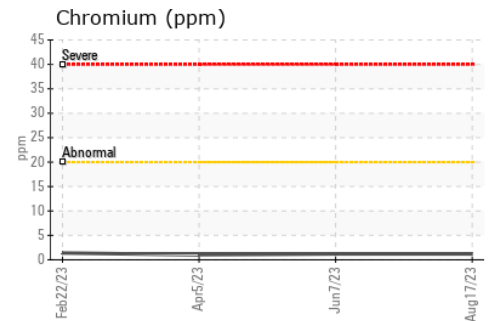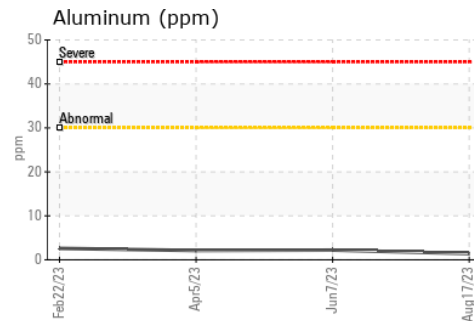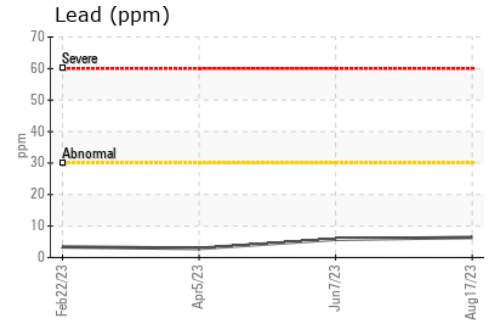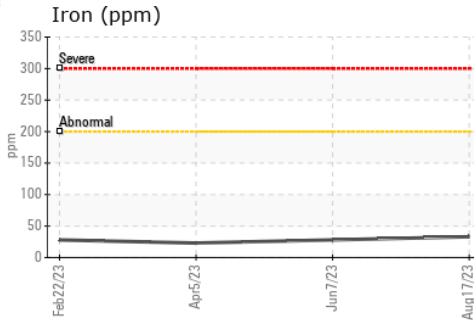

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
 Sample No. : WC0838806 Received : 28 Aug 2023
 Lab Number : 02578598 Diagnosed : 28 Aug 2023
 Unique Number : 5631658 Diagnostician : Wes Davis
 Test Package : MOB 1

Thomas Solutions
 70 Beach Road
 Hamilton, ON
 CA L7L 8K3
 Contact: Alison Nyland
 alison.nyland@thomassolutions.ca
 T: (905)545-8808
 F: (905)549-9016

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.