


# **OIL ANALYSIS REPORT**







Machine Id CL/1 Component Gearbox **NOT GIVEN (--- LTR)** 

#### Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

## Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

## **Fluid Condition**

Viscosity of sample indicates oil is within ISO 320 range, advise investigate. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

				Aug2023		
SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0817282		
Sample Date		Client Info		27 Aug 2023		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184*		0		
Iron	ppm	ASTM D5185(m)	>200	5		
Chromium	ppm	ASTM D5185(m)	>15	0		
Nickel	ppm	ASTM D5185(m)	>15	<1		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)	>25	<1		
Lead	ppm	ASTM D5185(m)		0		
Copper	ppm	ASTM D5185(m)	>200	1		
Tin	ppm	ASTM D5185(m)	>25	0		
Antimony	ppm	ASTM D5185(m)	>5	0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		9		
Barium	ppm	ASTM D5185(m)		0		
Molybdenum	ppm	ASTM D5185(m)		<1		
Manganese	ppm	ASTM D5185(m)		0		
Magnesium	ppm	ASTM D5185(m)		2		
Calcium	• •	ASTM D5185(m)		5		
	ppm	ASTM D5185(m)		126		
Phosphorus Zinc	ppm	ASTM D5185(m) ASTM D5185(m)		3		
	ppm			_		
Sulfur Lithium	ppm	ASTM D5185(m) ASTM D5185(m)		13352 <1		
	ррпп					
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>50	3		
Sodium	ppm	ASTM D5185(m)		<1		
Potassium	ppm	ASTM D5185(m)	>20	<1		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
	1/011/	AOTA DOZA:		0.00		


0.38

Acid Number (AN)

mg KOH/g ASTM D974\*



## **OIL ANALYSIS REPORT**

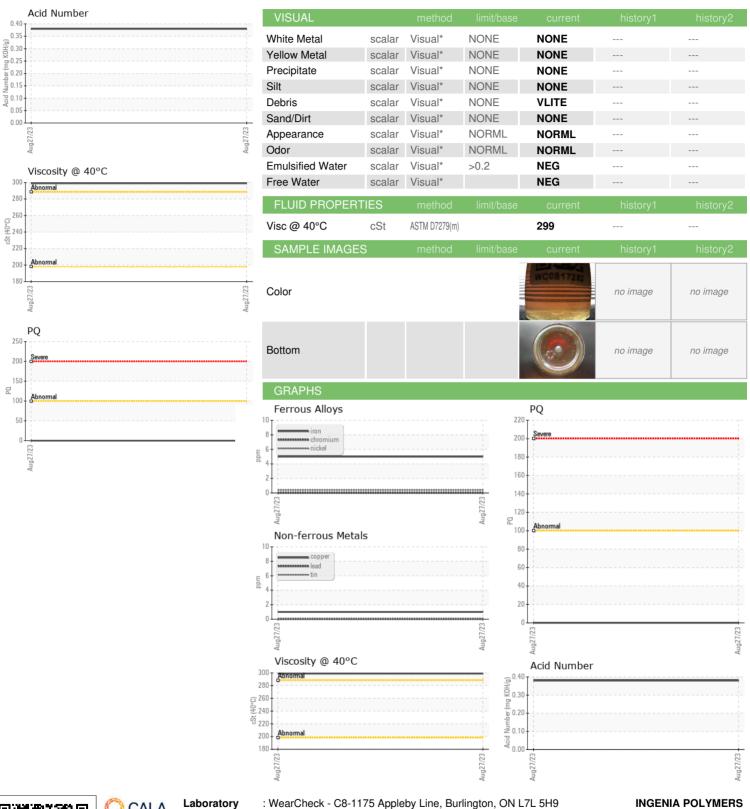



CALA ISO 17025:2017 Accredited Laboratory

Laboratory Sample No. Lab Number Unique Number

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 : WC0817282 : 02578912

Received : 5631972

: 28 Aug 2023 Diagnosed : 29 Aug 2023 Diagnostician : Kevin Marson Test Package : IND 2 (Additional Tests: TAN Man)

565 GREENWICH ST, P.O. BOX 214 STN MAIN BRANTFORD, ON CA N3T 5M8

Contact: Al Mans albert.mans@ingeniapolymers.com T:

To discuss this sample report, contact Customer Service at 1-800-268-2131. Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

F: (519)758-8036