



# OIL ANALYSIS REPORT

Sample Rating Trend


**NORMAL**



Machine Id  
**SALFORD #8 POWER PACK #3**

Component  
**Unknown Component**

Fluid  
**CHEVRON 1000 THF (--- LTR)**

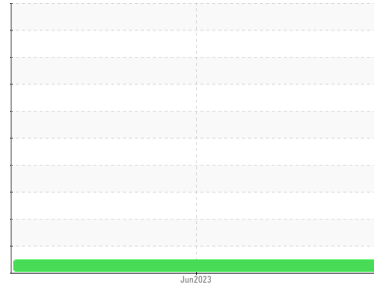

## DIAGNOSIS

### Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please provide more complete information on your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the sample.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the sample is suitable for further service.

## SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1 | history2 |
|---------------|-------------|-------------|--------------------|----------|----------|
| Sample Number | Client Info |             | <b>WC0815329</b>   | ---      | ---      |
| Sample Date   | Client Info |             | <b>08 Jun 2023</b> | ---      | ---      |
| Machine Age   | hrs         | Client Info | <b>0</b>           | ---      | ---      |
| Oil Age       | hrs         | Client Info | <b>0</b>           | ---      | ---      |
| Oil Changed   |             | Client Info | <b>N/A</b>         | ---      | ---      |
| Sample Status |             |             | <b>NORMAL</b>      | ---      | ---      |

## WEAR METALS

|           | method      | limit/base    | current      | history1 | history2 |
|-----------|-------------|---------------|--------------|----------|----------|
| PQ        | ASTM D8184* |               | <b>0</b>     | ---      | ---      |
| Iron      | ppm         | ASTM D5185(m) | <b>2</b>     | ---      | ---      |
| Chromium  | ppm         | ASTM D5185(m) | <b>0</b>     | ---      | ---      |
| Nickel    | ppm         | ASTM D5185(m) | <b>&lt;1</b> | ---      | ---      |
| Titanium  | ppm         | ASTM D5185(m) | <b>0</b>     | ---      | ---      |
| Silver    | ppm         | ASTM D5185(m) | <b>0</b>     | ---      | ---      |
| Aluminum  | ppm         | ASTM D5185(m) | <b>&lt;1</b> | ---      | ---      |
| Lead      | ppm         | ASTM D5185(m) | <b>0</b>     | ---      | ---      |
| Copper    | ppm         | ASTM D5185(m) | <b>&lt;1</b> | ---      | ---      |
| Tin       | ppm         | ASTM D5185(m) | <b>0</b>     | ---      | ---      |
| Antimony  | ppm         | ASTM D5185(m) | <b>0</b>     | ---      | ---      |
| Vanadium  | ppm         | ASTM D5185(m) | <b>0</b>     | ---      | ---      |
| Beryllium | ppm         | ASTM D5185(m) | <b>0</b>     | ---      | ---      |
| Cadmium   | ppm         | ASTM D5185(m) | <b>0</b>     | ---      | ---      |

## ADDITIVES

|            | method | limit/base    | current      | history1 | history2 |
|------------|--------|---------------|--------------|----------|----------|
| Boron      | ppm    | ASTM D5185(m) | <b>5</b>     | ---      | ---      |
| Barium     | ppm    | ASTM D5185(m) | <b>&lt;1</b> | ---      | ---      |
| Molybdenum | ppm    | ASTM D5185(m) | <b>2</b>     | ---      | ---      |
| Manganese  | ppm    | ASTM D5185(m) | <b>&lt;1</b> | ---      | ---      |
| Magnesium  | ppm    | ASTM D5185(m) | <b>15</b>    | ---      | ---      |
| Calcium    | ppm    | ASTM D5185(m) | <b>2776</b>  | ---      | ---      |
| Phosphorus | ppm    | ASTM D5185(m) | <b>1022</b>  | ---      | ---      |
| Zinc       | ppm    | ASTM D5185(m) | <b>1186</b>  | ---      | ---      |
| Sulfur     | ppm    | ASTM D5185(m) | <b>2902</b>  | ---      | ---      |
| Lithium    | ppm    | ASTM D5185(m) | <b>&lt;1</b> | ---      | ---      |

## CONTAMINANTS




|           | method | limit/base        | current   | history1 | history2 |
|-----------|--------|-------------------|-----------|----------|----------|
| Silicon   | ppm    | ASTM D5185(m)     | <b>16</b> | ---      | ---      |
| Sodium    | ppm    | ASTM D5185(m)     | <b>1</b>  | ---      | ---      |
| Potassium | ppm    | ASTM D5185(m) >20 | <b>3</b>  | ---      | ---      |

## FLUID DEGRADATION

|                  | method   | limit/base | current     | history1 | history2 |
|------------------|----------|------------|-------------|----------|----------|
| Acid Number (AN) | mg KOH/g | ASTM D974* | <b>2.30</b> | ---      | ---      |



# OIL ANALYSIS REPORT

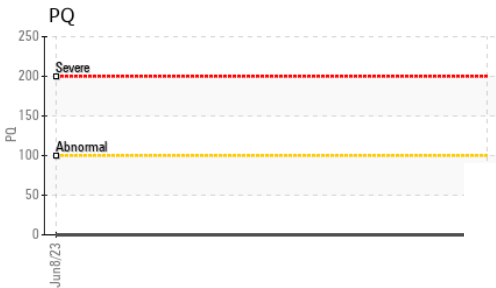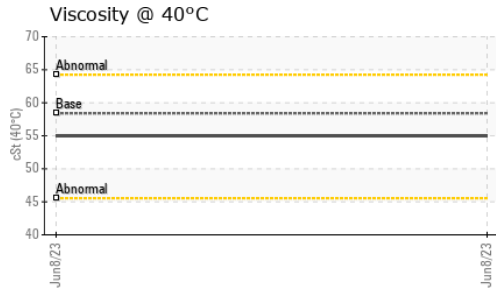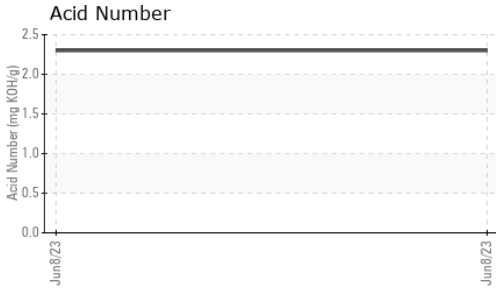





| VISUAL           | method | limit/base | current | history1 | history2 |     |
|------------------|--------|------------|---------|----------|----------|-----|
| White Metal      | scalar | Visual*    | NONE    | NONE     | ---      | --- |
| Yellow Metal     | scalar | Visual*    | NONE    | NONE     | ---      | --- |
| Precipitate      | scalar | Visual*    | NONE    | NONE     | ---      | --- |
| Silt             | scalar | Visual*    | NONE    | NONE     | ---      | --- |
| Debris           | scalar | Visual*    | NONE    | NONE     | ---      | --- |
| Sand/Dirt        | scalar | Visual*    | NONE    | NONE     | ---      | --- |
| Appearance       | scalar | Visual*    | NORML   | NORML    | ---      | --- |
| Odor             | scalar | Visual*    | NORML   | NORML    | ---      | --- |
| Emulsified Water | scalar | Visual*    | NEG     | ---      | ---      |     |
| Free Water       | scalar | Visual*    | NEG     | ---      | ---      |     |

| FLUID PROPERTIES | method | limit/base    | current | history1 | history2 |     |
|------------------|--------|---------------|---------|----------|----------|-----|
| Visc @ 40°C      | cSt    | ASTM D7279(m) | 58.4    | 55.0     | ---      | --- |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
|---------------|--------|------------|---------|----------|----------|

|        |  |          |          |
|--------|--|----------|----------|
| Color  |  | no image | no image |
| Bottom |  | no image | no image |

## GRAPHS

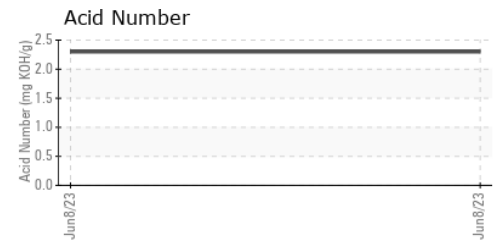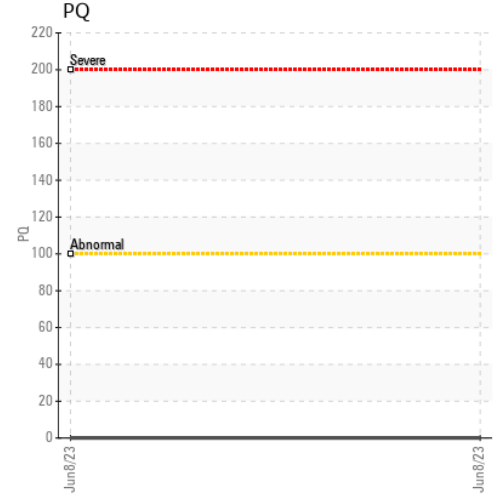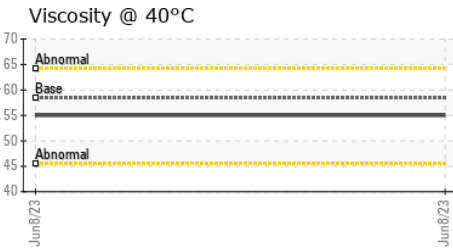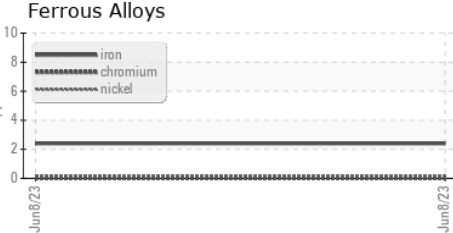

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0815329 **Received** : 29 Aug 2023  
**Lab Number** : 02579109 **Diagnosed** : 30 Aug 2023  
**Unique Number** : 5632169 **Diagnostician** : Kevin Marson  
**Test Package** : IND 2 ( Additional Tests: TAN MAN )

**Salford Group Inc**  
 364018 McBeth Rd  
 Salford, ON  
 CA N0J 1W0  
 Contact: Chris Poppe  
 chris.poppe@salfordgroup.com  
 T: (519)485-3977  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.