


PROBLEM SUMMARY

Sample Rating Trend





WEAR

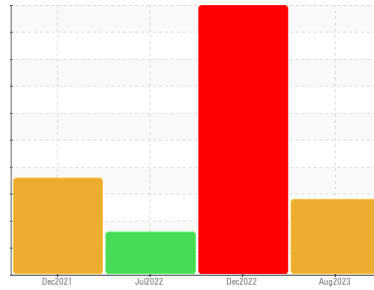

Machine Id
TIMM #2 PLUNGER 2
Component
Gearbox
Fluid
SHELL OMALA S2 G 68 (--- GAL)

COMPONENT CONDITION SUMMARY

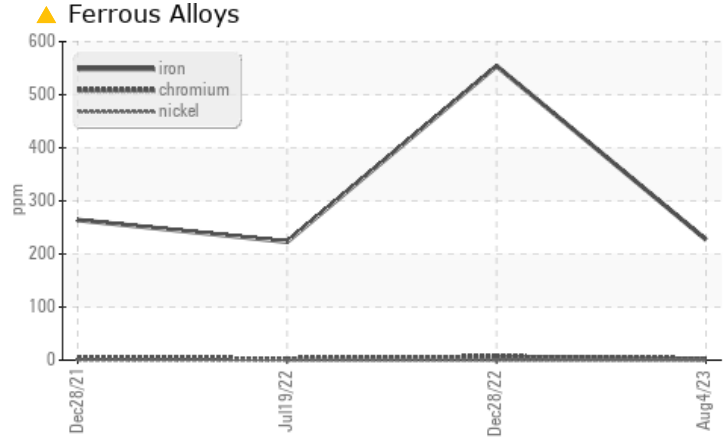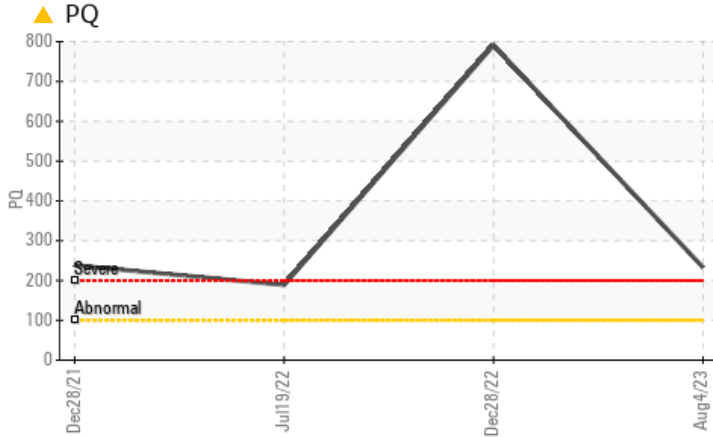

RECOMMENDATION

The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

PROBLEMATIC TEST RESULTS

Sample Status		ASTM D8184*	ABNORMAL	SEVERE	ABNORMAL
PQ			▲ 233	791	189
Iron	ppm	ASTM D5185(m) >200	▲ 227	554	▲ 223

Customer Id: TOYCAM
Sample No.: CB0031438
Lab Number: 02579124
Test Package: IND 3



To manage this report scan the QR code

To discuss the diagnosis or test data:
Kevin Marson +1 (289)291-4644 x4644
Kevin.Marson@wearcheck.com

To change component or sample information:
Gloria Gonzalez +1 (289)291-4643 x4643
gloria.gonzalez@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Resample	---	---	?	We recommend an early resample to monitor this condition.
Information Required	---	---	?	NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

HISTORICAL DIAGNOSIS

28 Dec 2022 Diag: Kevin Marson

WEAR



The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Iron ppm levels are severe. PQ levels are severe. Wear particle analysis indicates that the ferrous rubbing particles are abnormal. Gear wear is indicated. The very high ferrous density (PQ) index indicates that severe wear is occurring. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The oil is no longer serviceable as a result of the abnormal and/or severe wear.

view report



19 Jul 2022 Diag: Kevin Marson

WEAR



The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Iron ppm levels are abnormal. Wear particle analysis indicates that the ferrous rubbing particles are abnormal. The low ferrous density (PQ) index indicates the wear metal levels are due to corrosion. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The oil is no longer serviceable as a result of the abnormal and/or severe wear.

view report



28 Dec 2021 Diag: Kevin Marson

WEAR




We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. PQ levels are abnormal. Iron ppm levels are abnormal. Wear particle analysis indicates that the ferrous rubbing particles are abnormal. Gear wear is indicated. The high ferrous density (PQ) index indicates that abnormal wear is occurring. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The oil is no longer serviceable as a result of the abnormal and/or severe wear.

view report



OIL ANALYSIS REPORT

Sample Rating Trend

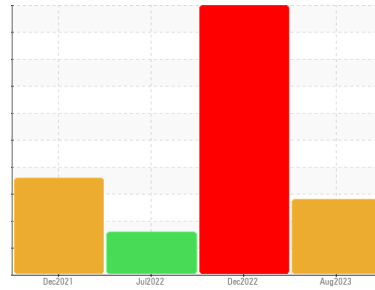

WEAR



Machine Id
TIMM #2 PLUNGER 2
 Component
Gearbox
 Fluid
SHELL OMALA S2 G 68 (--- GAL)

DIAGNOSIS

Recommendation

The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

Wear

PQ levels are abnormal. Iron ppm levels are abnormal. Gear wear is indicated. The high ferrous density (PQ) index indicates that abnormal wear is occurring. The direct-reading & analytical ferrographic results are normal indicating no abnormal wear in the system.

Contaminants

There is no indication of any contamination in the oil.

Oil Condition

The AN level is acceptable for this fluid. The oil is no longer serviceable as a result of the abnormal and/or severe wear.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			CB0031438	CB0031053	CB0031116
Sample Date	Client Info			04 Aug 2023	28 Dec 2022	19 Jul 2022
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed	Client Info			Changed	Changed	Changed
Sample Status				ABNORMAL	SEVERE	ABNORMAL





WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184*		▲ 233	791	189
Iron	ppm	ASTM D5185(m)	>200	▲ 227	554	▲ 223
Chromium	ppm	ASTM D5185(m)	>15	2	6	3
Nickel	ppm	ASTM D5185(m)	>15	0	0	0
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)		0	0	0
Aluminum	ppm	ASTM D5185(m)	>25	<1	<1	<1
Lead	ppm	ASTM D5185(m)	>100	0	0	<1
Copper	ppm	ASTM D5185(m)	>200	1	5	5
Tin	ppm	ASTM D5185(m)	>25	0	0	0
Antimony	ppm	ASTM D5185(m)	>5	0	<1	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	6.2	0	1	<1
Barium	ppm	ASTM D5185(m)	0.0	0	0	0
Molybdenum	ppm	ASTM D5185(m)	0	0	0	0
Manganese	ppm	ASTM D5185(m)		1	3	1
Magnesium	ppm	ASTM D5185(m)	0	<1	<1	0
Calcium	ppm	ASTM D5185(m)	0.0	<1	0	<1
Phosphorus	ppm	ASTM D5185(m)	290	306	330	278
Zinc	ppm	ASTM D5185(m)	3.8	11	10	11
Sulfur	ppm	ASTM D5185(m)	8167	7747	7885	7826
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>50	1	2	2
Sodium	ppm	ASTM D5185(m)		<1	1	<1
Potassium	ppm	ASTM D5185(m)	>20	0	0	<1

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*		0.36	0.31	0.34

OIL ANALYSIS REPORT


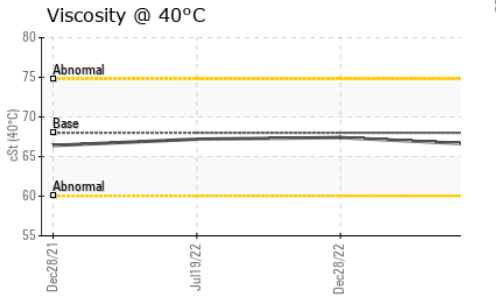
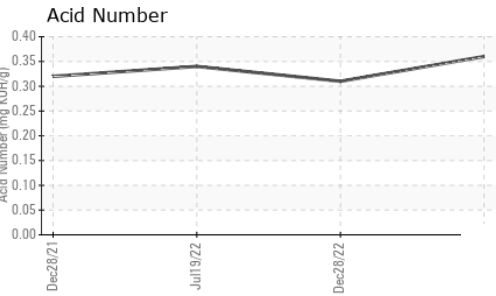
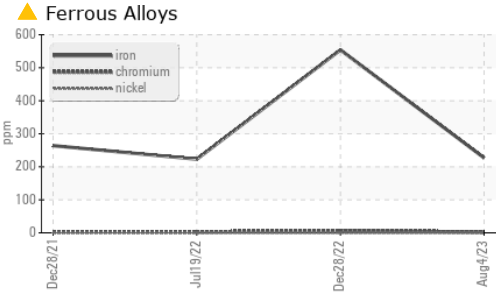
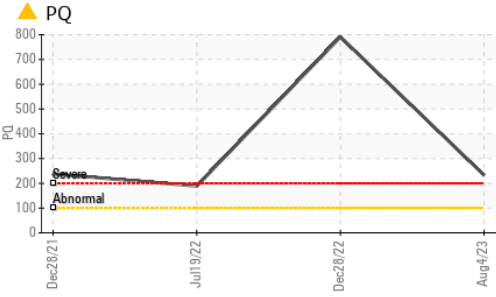


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	VLITE	NONE LIGHT
Yellow Metal	scalar	Visual*	NONE	NONE	NONE NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE NONE
Silt	scalar	Visual*	NONE	LIGHT	NONE NONE
Debris	scalar	Visual*	NONE	NONE	NONE NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE NONE
Appearance	scalar	Visual*	NORML	NORML	NORML NORML
Odor	scalar	Visual*	NORML	NORML	NORML NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG NEG
Free Water	scalar	Visual*		NEG	NEG NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	68.0	66.5	67.4 67.2

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

GRAPHS

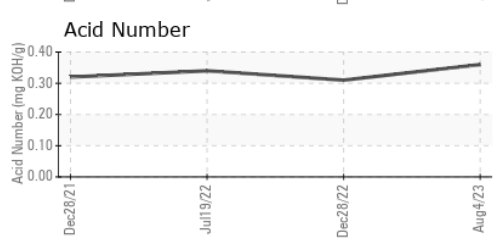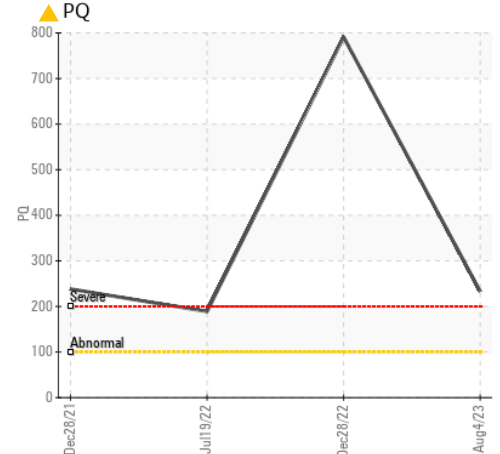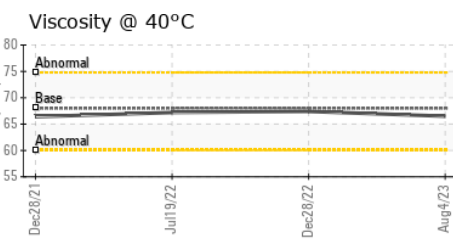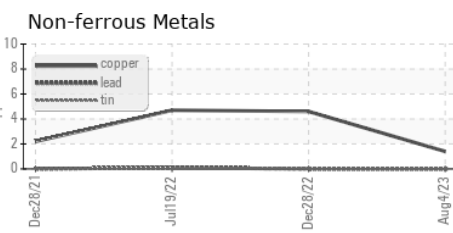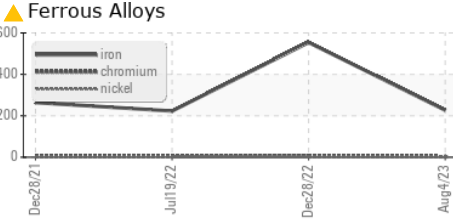




Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : CB0031438
Lab Number : 02579124
Unique Number : 5632184
Test Package : IND 3

TOYOTA MOTOR MANUFACT.
 1055 FOUNTAIN STREET N.
 CAMBRIDGE, ON
 CA N3H 5K2
 Contact: mike clappison
 mike.clappison@toyota.com
 T: (519)212-5023
 F: (519)653-9638

*To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.*

FERROGRAPHY REPORT

Machine Id
TIMM #2 PLUNGER 2
Component
Gearbox
Fluid
SHELL OMALA S2 G 68 (--- GAL)

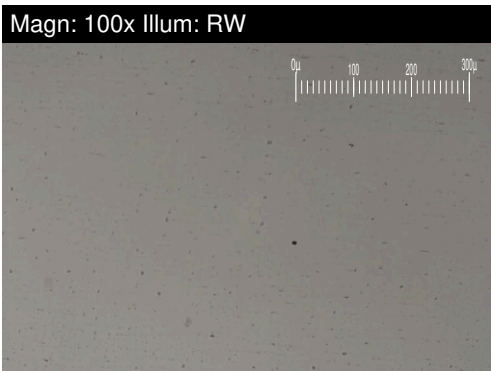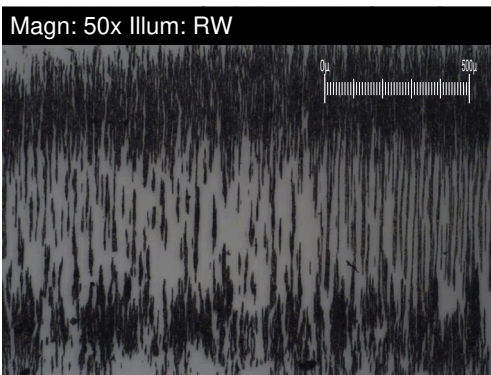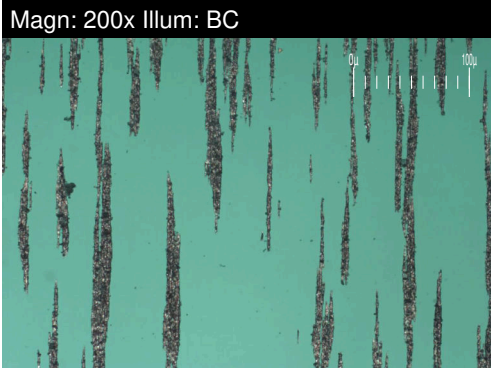


DR-FERROGRAPHY		method	limit/base	current	history1	history2
Large Particles		DR-Ferr*		8.8	149.8	65.2
Small Particles		DR-Ferr*		3.1	94.3	31.5
Total Particles		DR-Ferr*	>---	11.9	244.1	96.7
Large Particles Percentage	%	DR-Ferr*		47.9	22.7	34.9
Severity Index		DR-Ferr*		50	8314	2197

FERROGRAPHY		method	limit/base	current	history1	history2
Ferrous Rubbing	Scale 0-10	ASTM D7684*		6	10	0
Ferrous Sliding	Scale 0-10	ASTM D7684*				
Ferrous Cutting	Scale 0-10	ASTM D7684*				
Ferrous Rolling	Scale 0-10	ASTM D7684*		3	4	4
Ferrous Break-in	Scale 0-10	ASTM D7684*				
Ferrous Spheres	Scale 0-10	ASTM D7684*				
Ferrous Black Oxides	Scale 0-10	ASTM D7684*				
Ferrous Red Oxides	Scale 0-10	ASTM D7684*				
Ferrous Corrosive	Scale 0-10	ASTM D7684*				
Ferrous Other	Scale 0-10	ASTM D7684*				
Nonferrous Rubbing	Scale 0-10	ASTM D7684*				
Nonferrous Sliding	Scale 0-10	ASTM D7684*				
Nonferrous Cutting	Scale 0-10	ASTM D7684*				
Nonferrous Rolling	Scale 0-10	ASTM D7684*				
Nonferrous Other	Scale 0-10	ASTM D7684*				
Carbonaceous Material	Scale 0-10	ASTM D7684*				
Lubricant Degradation	Scale 0-10	ASTM D7684*				
Sand/Dirt	Scale 0-10	ASTM D7684*		1	1	1
Fibres	Scale 0-10	ASTM D7684*				
Spheres	Scale 0-10	ASTM D7684*				
Other	Scale 0-10	ASTM D7684*		1	1	1

WEAR

PQ levels are abnormal. Iron ppm levels are abnormal. Gear wear is indicated. The high ferrous density (PQ) index indicates that abnormal wear is occurring. The direct-reading & analytical ferrographic results are normal indicating no abnormal wear in the system.

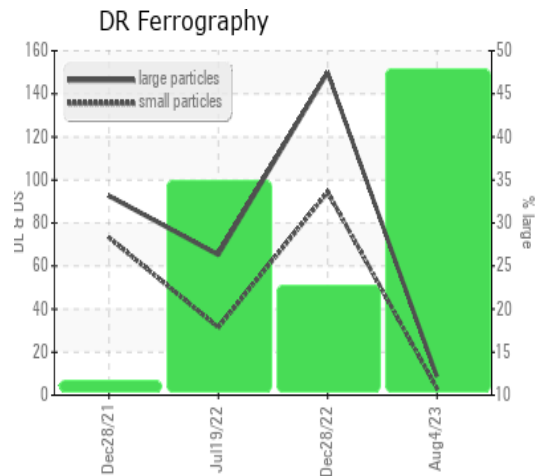

This page left intentionally blank