


PROBLEM SUMMARY

Sample Rating Trend




ADDITIVES

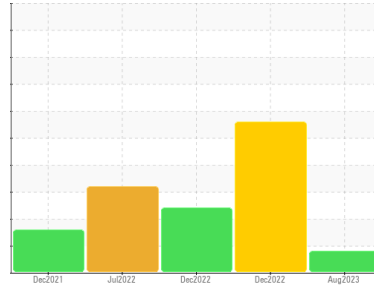

Machine Id
TIMM #2 PLUNGER 5
 Component
Gearbox
 Fluid
SHELL OMALA S2 G 68 (--- GAL)

COMPONENT CONDITION SUMMARY

▲ Additives

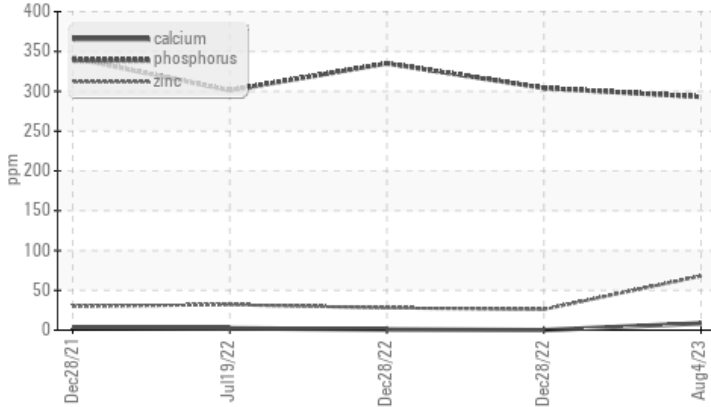

RECOMMENDATION

Confirm the source of the lubricant being utilized for top-up/fill. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

PROBLEMATIC TEST RESULTS

Sample Status				ATTENTION	SEVERE	ABNORMAL
Barium	ppm	ASTM D5185(m)	0.0	▲ 38	<1	0
Zinc	ppm	ASTM D5185(m)	3.8	▲ 68	26	28

Customer Id: TOYCAM
 Sample No.: CB0031441
 Lab Number: 02579127
 Test Package: IND 3



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Kevin Marson +1 (289)291-4644 x4644
Kevin.Marson@wearcheck.com

To change component or sample information:
 Gloria Gonzalez +1 (289)291-4643 x4643
gloria.gonzalez@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Information Required	---	---	?	NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.
Check Fluid Source	---	---	?	Confirm the source of the lubricant being utilized for top-up/fill.

HISTORICAL DIAGNOSIS

28 Dec 2022 Diag: Kevin Marson

WEAR



The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. PQ levels are severe. Iron ppm levels are abnormal. Wear particle analysis indicates that the ferrous rubbing particles are abnormal. Gear wear is indicated. The very high ferrous density (PQ) index indicates that severe wear is occurring. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The oil is no longer serviceable as a result of the abnormal and/or severe wear.

view report



28 Dec 2022 Diag: Kevin Marson

WEAR PARTICLES



The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Wear particle analysis indicates that the ferrous rolling and ferrous rubbing particles are abnormal. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The oil is no longer serviceable as a result of the abnormal and/or severe wear.

view report



19 Jul 2022 Diag: Kevin Marson

WEAR PARTICLES




The oil change at the time of sampling has been noted. Confirm the source of the lubricant being utilized for top-up/fill. We recommend an early resample to monitor this condition. The fluid was specified as SHELL OMALA S2 G 68, however, a fluid match indicates that this fluid is ISO 68 Gear Oil. Please confirm the oil type and grade on your next sample. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Wear particle analysis indicates that the ferrous rolling and ferrous rubbing particles are abnormal. There is no indication of any contamination in the oil. Additive levels indicate the addition of a different brand, or type of oil. The AN level is acceptable for this fluid. The oil is no longer serviceable as a result of the abnormal and/or severe wear.

view report



OIL ANALYSIS REPORT

Sample Rating Trend

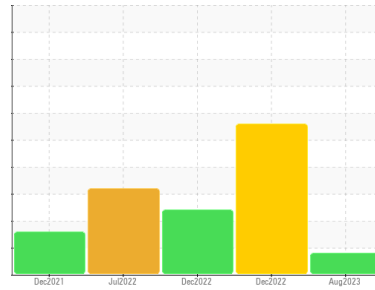

ADDITIVES



Machine Id
TIMM #2 PLUNGER 5
 Component
Gearbox
 Fluid
SHELL OMALA S2 G 68 (--- GAL)

DIAGNOSIS

▲ Recommendation

Confirm the source of the lubricant being utilized for top-up/fill. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

Wear

All component wear rates are normal. The direct-reading & analytical ferrographic results are normal indicating no abnormal wear in the system.

Contaminants

There is no indication of any contamination in the oil.

▲ Oil Condition

Additive levels indicate the addition of a different brand, or type of oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	CB0031441	CB0031055	CB0031056
Sample Date	Client Info	04 Aug 2023	28 Dec 2022	28 Dec 2022
Machine Age	hrs	Client Info	0	0
Oil Age	hrs	Client Info	0	0
Oil Changed	Client Info	Changed	Changed	Changed
Sample Status		ATTENTION	SEVERE	ABNORMAL

WEAR METALS

method	limit/base	current	history1	history2	
PQ	ASTM D8184*	10	1186	50	
Iron	ppm	ASTM D5185(m) >200	123	295	146
Chromium	ppm	ASTM D5185(m) >15	4	2	3
Nickel	ppm	ASTM D5185(m) >15	0	<1	0
Titanium	ppm	ASTM D5185(m)	<1	0	0
Silver	ppm	ASTM D5185(m)	0	0	0
Aluminum	ppm	ASTM D5185(m) >25	2	<1	<1
Lead	ppm	ASTM D5185(m) >100	4	<1	<1
Copper	ppm	ASTM D5185(m) >200	2	12	10
Tin	ppm	ASTM D5185(m) >25	0	0	0
Antimony	ppm	ASTM D5185(m) >5	0	<1	<1
Vanadium	ppm	ASTM D5185(m)	0	0	0
Beryllium	ppm	ASTM D5185(m)	0	0	0
Cadmium	ppm	ASTM D5185(m)	0	0	0

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m) 6.2	0	<1	4
Barium	ppm	ASTM D5185(m) 0.0	38	<1	0
Molybdenum	ppm	ASTM D5185(m) 0	<1	0	13
Manganese	ppm	ASTM D5185(m)	<1	2	1
Magnesium	ppm	ASTM D5185(m) 0	2	<1	0
Calcium	ppm	ASTM D5185(m) 0.0	9	0	<1
Phosphorus	ppm	ASTM D5185(m) 290	293	304	335
Zinc	ppm	ASTM D5185(m) 3.8	68	26	28
Sulfur	ppm	ASTM D5185(m) 8167	8323	8032	7855
Lithium	ppm	ASTM D5185(m)	<1	<1	2

CONTAMINANTS


method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m) >50	3	2	4
Sodium	ppm	ASTM D5185(m)	4	1	2
Potassium	ppm	ASTM D5185(m) >20	<1	0	0

FLUID DEGRADATION


method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D974*	0.27	0.28	0.34

OIL ANALYSIS REPORT


▲ Additives

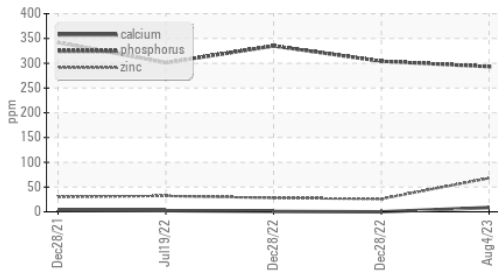


Acid Number

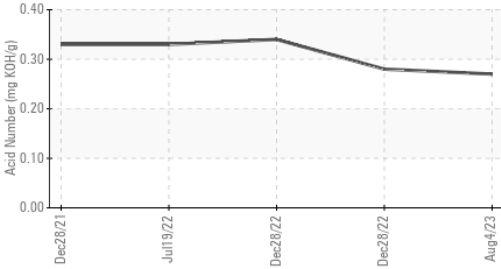

Viscosity @ 40°C

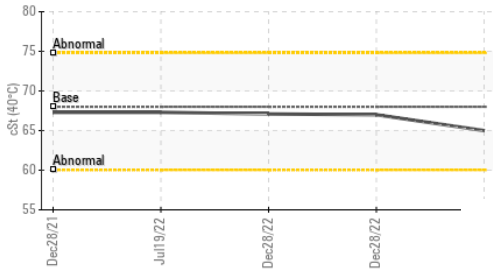

PQ

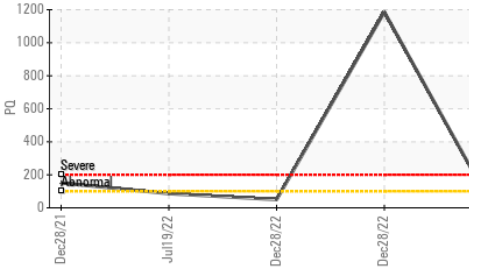






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	VLITE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	VLITE	NONE
Debris	scalar	Visual*	NONE	VLITE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	68.0	65.0	67.0

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------



GRAPHS

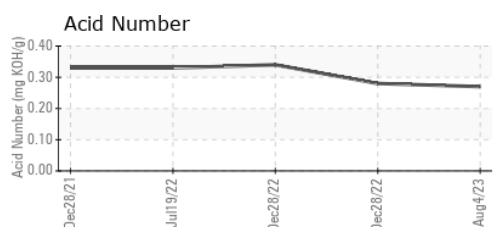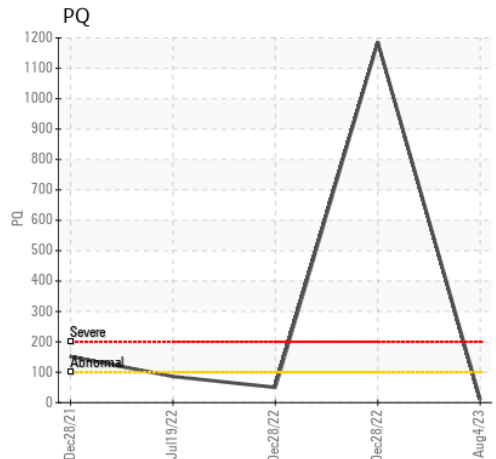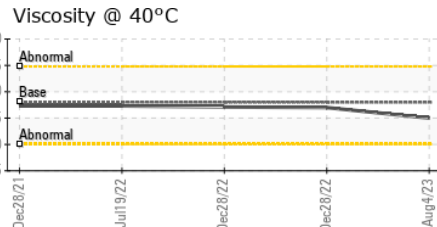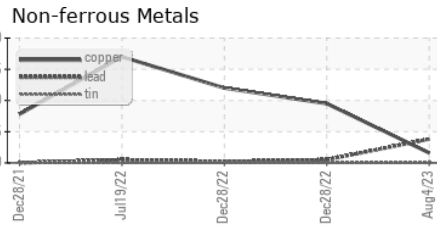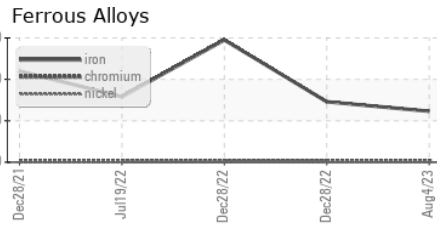

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : CB0031441
Lab Number : 02579127
Unique Number : 5632187
Test Package : IND 3




Received : 29 Aug 2023
Diagnosed : 01 Sep 2023
Diagnostician : Kevin Marson

TOYOTA MOTOR MANUFACT.
 1055 FOUNTAIN STREET N.
 CAMBRIDGE, ON
 CA N3H 5K2
 Contact: mike clappison
 mike.clappison@toyota.com
 T: (519)212-5023
 F: (519)653-9638

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

FERROGRAPHY REPORT

Machine Id
TIMM #2 PLUNGER 5
Component
Gearbox
Fluid
SHELL OMALA S2 G 68 (--- GAL)

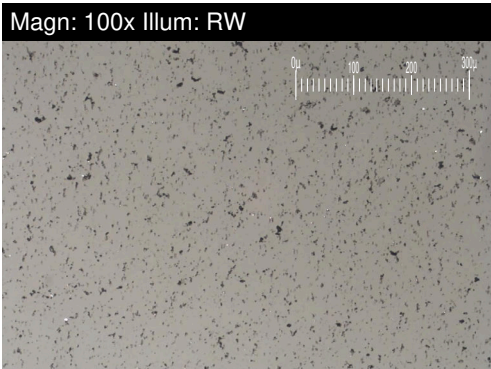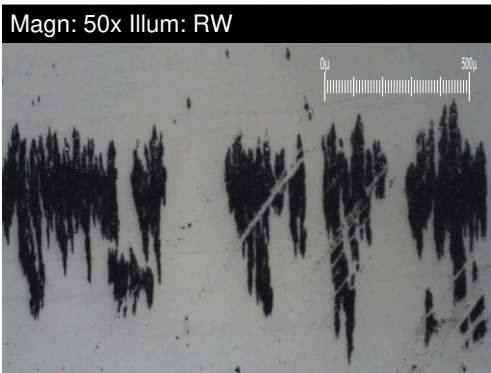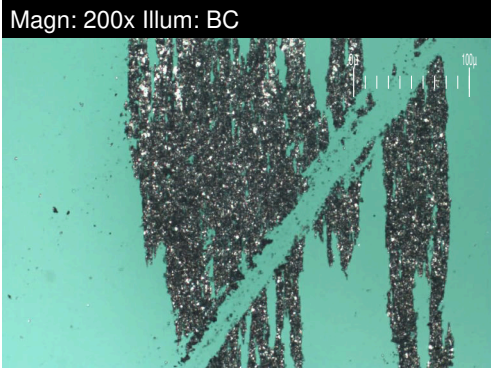


DR-FERROGRAPHY		method	limit/base	current	history1	history2
Large Particles		DR-Ferr*		7.5	157.1	117.0
Small Particles		DR-Ferr*		8.6	98.0	53.9
Total Particles		DR-Ferr*	>---	16.1	255.1	170.9
Large Particles Percentage	%	DR-Ferr*		0	23.2	36.9
Severity Index		DR-Ferr*		8	9285	7383

FERROGRAPHY		method	limit/base	current	history1	history2
Ferrous Rubbing	Scale 0-10	ASTM D7684*		4	▲	0
Ferrous Sliding	Scale 0-10	ASTM D7684*				
Ferrous Cutting	Scale 0-10	ASTM D7684*				
Ferrous Rolling	Scale 0-10	ASTM D7684*		2	■ 4	▲ 5
Ferrous Break-in	Scale 0-10	ASTM D7684*				
Ferrous Spheres	Scale 0-10	ASTM D7684*				
Ferrous Black Oxides	Scale 0-10	ASTM D7684*				
Ferrous Red Oxides	Scale 0-10	ASTM D7684*				
Ferrous Corrosive	Scale 0-10	ASTM D7684*		1		
Ferrous Other	Scale 0-10	ASTM D7684*				
Nonferrous Rubbing	Scale 0-10	ASTM D7684*				
Nonferrous Sliding	Scale 0-10	ASTM D7684*				
Nonferrous Cutting	Scale 0-10	ASTM D7684*				
Nonferrous Rolling	Scale 0-10	ASTM D7684*				
Nonferrous Other	Scale 0-10	ASTM D7684*				
Carbonaceous Material	Scale 0-10	ASTM D7684*				
Lubricant Degradation	Scale 0-10	ASTM D7684*				
Sand/Dirt	Scale 0-10	ASTM D7684*		1	■ 1	■ 1
Fibres	Scale 0-10	ASTM D7684*				
Spheres	Scale 0-10	ASTM D7684*				
Other	Scale 0-10	ASTM D7684*		2	■ 1	■ 1

WEAR

All component wear rates are normal. The direct-reading & analytical ferrographic results are normal indicating no abnormal wear in the system.

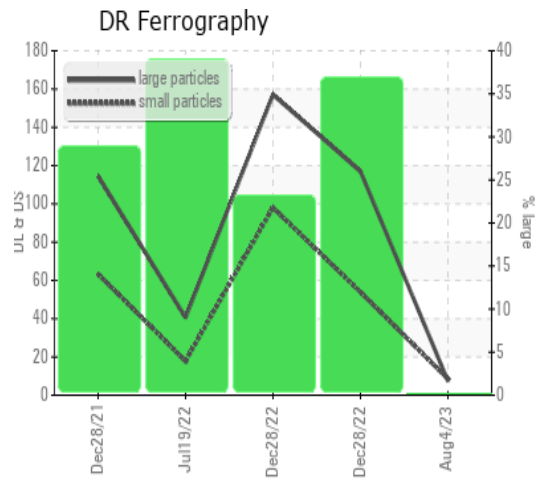

This page left intentionally blank