




PROBLEM SUMMARY

Sample Rating Trend


ISO

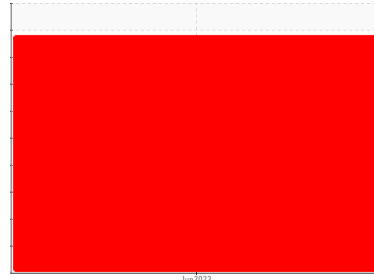

Machine Id
SALFORD #11
Component
Hydraulic System
Fluid
CHEVRON 1000 THF (--- GAL)

COMPONENT CONDITION SUMMARY

Particle Trend

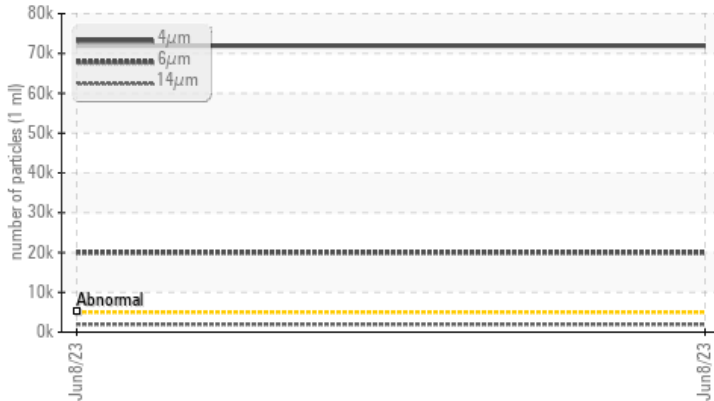

RECOMMENDATION

We advise that you check all areas where contaminants can enter the system. We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. Resample in 30-45 days to monitor this situation. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the component make and model with your next sample. We suspect that the abnormal contaminant(s) is the result of incorrect sampling technique. DISCLAIMER: Interpretation of results is based on the sample as received from the customer. The condition of the sample and the method of sampling cannot be verified.

PROBLEMATIC TEST RESULTS

Sample Status	ASTM D7647	ISO 4406 (c)	Visual*	SEVERE	---	---
Particles >4µm	>5000	>19/17/14	NONE	71921	---	---
Particles >6µm	>1300	>19/17/14	NONE	20014	---	---
Particles >14µm	>160	>19/17/14	NONE	1958	---	---
Particles >21µm	>40	>19/17/14	NONE	770	---	---
Particles >38µm	>10	>19/17/14	NONE	74	---	---
Particles >71µm	>3	>19/17/14	NONE	8	---	---
Oil Cleanliness	>19/17/14	>19/17/14	NONE	23/22/18	---	---
Debris	scalar	Visual*	NONE	LTMOD	---	---
PrtFilter					no image	no image

Customer Id: SAL364SAL
Sample No.: WC0815330
Lab Number: 02579129
Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
Kevin Marson +1 (289)291-4644 x4644
Kevin.Marson@wearcheck.com

To change component or sample information:
Gloria Gonzalez +1 (289)291-4643 x4643
gloria.gonzalez@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Filter	---	---	?	We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid.
Resample	---	---	?	Resample in 30-45 days to monitor this situation.
Alert	---	---	?	We suspect that the abnormal contaminant(s) is the result of incorrect sampling technique. DISCLAIMER: Interpretation of results is based on the sample as received from the customer. The condition of the sample and the method of sampling cannot be verified. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the component make and model with your next sample.
Information Required	---	---	?	The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather.
Check Breathers	---	---	?	We advise that you check all areas where contaminants can enter the system.
Filter Fluid	---	---	?	We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid.


HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

Sample Rating Trend

ISO

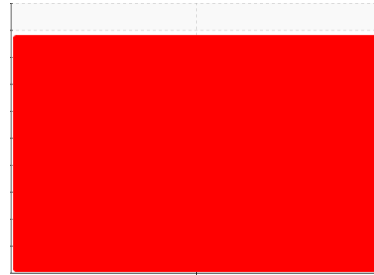

Machine Id
SALFORD #11
Component
Hydraulic System
Fluid
CHEVRON 1000 THF (--- GAL)

DIAGNOSIS

Recommendation

We advise that you check all areas where contaminants can enter the system. We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. Resample in 30-45 days to monitor this situation. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the component make and model with your next sample. We suspect that the abnormal contaminant(s) is the result of incorrect sampling technique. DISCLAIMER: Interpretation of results is based on the sample as received from the customer. The condition of the sample and the method of sampling cannot be verified.

Wear

All component wear rates are normal.


Contamination

There is a high amount of particulates (2 to 100 microns in size) present in the oil. Moderate concentration of visible dirt/debris present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

Particle Filter (Magn: 100 x)

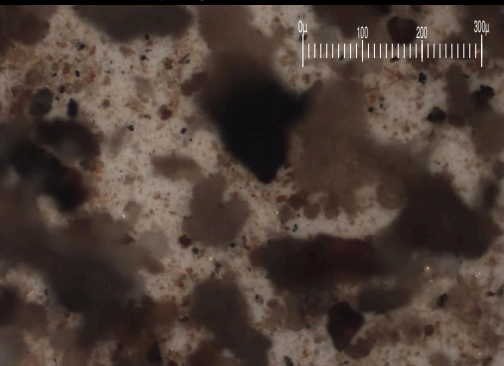

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0815330	---	---
Sample Date	Client Info		08 Jun 2023	---	---
Machine Age	hrs	Client Info	0	---	---
Oil Age	hrs	Client Info	0	---	---
Oil Changed	Client Info		N/A	---	---
Sample Status			SEVERE	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>20	2	---
Chromium	ppm	ASTM D5185(m)	>10	0	---
Nickel	ppm	ASTM D5185(m)	>10	0	---
Titanium	ppm	ASTM D5185(m)		0	---
Silver	ppm	ASTM D5185(m)		0	---
Aluminum	ppm	ASTM D5185(m)	>10	<1	---
Lead	ppm	ASTM D5185(m)	>10	0	---
Copper	ppm	ASTM D5185(m)	>75	<1	---
Tin	ppm	ASTM D5185(m)	>10	0	---
Antimony	ppm	ASTM D5185(m)		0	---
Vanadium	ppm	ASTM D5185(m)		0	---
Beryllium	ppm	ASTM D5185(m)		0	---
Cadmium	ppm	ASTM D5185(m)		0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		4	---
Barium	ppm	ASTM D5185(m)		<1	---
Molybdenum	ppm	ASTM D5185(m)		1	---
Manganese	ppm	ASTM D5185(m)		<1	---
Magnesium	ppm	ASTM D5185(m)		14	---
Calcium	ppm	ASTM D5185(m)		2738	---
Phosphorus	ppm	ASTM D5185(m)		1010	---
Zinc	ppm	ASTM D5185(m)		1186	---
Sulfur	ppm	ASTM D5185(m)		2912	---
Lithium	ppm	ASTM D5185(m)		<1	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>20	16	---
Sodium	ppm	ASTM D5185(m)		2	---
Potassium	ppm	ASTM D5185(m)	>20	4	---

FLUID CLEANLINESS





	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	71921	---	---
Particles >6µm	ASTM D7647	>1300	20014	---	---
Particles >14µm	ASTM D7647	>160	1958	---	---
Particles >21µm	ASTM D7647	>40	770	---	---
Particles >38µm	ASTM D7647	>10	74	---	---
Particles >71µm	ASTM D7647	>3	8	---	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	23/22/18	---	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	2.15	---	---



OIL ANALYSIS REPORT

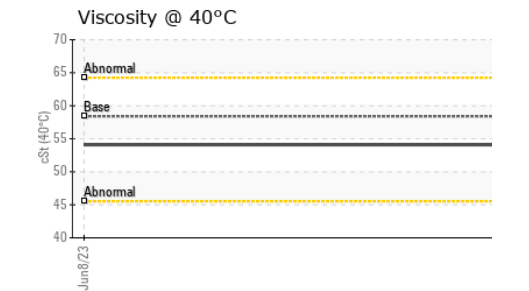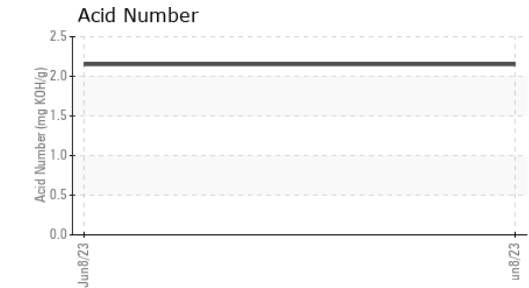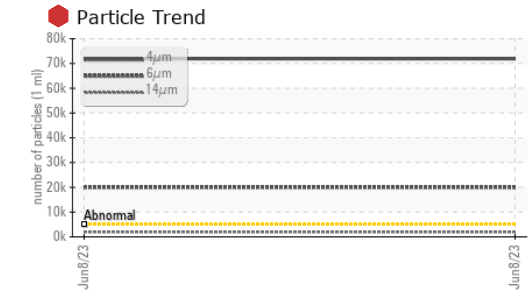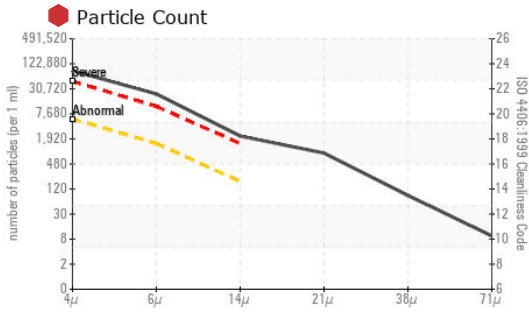

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0815330 **Received** : 29 Aug 2023
Lab Number : 02579129 **Diagnosed** : 30 Aug 2023
Unique Number : 5632189 **Diagnostician** : Kevin Marson
Test Package : IND 2 (Additional Tests: Bottom, BottomAnalysis, FilterPatch, PrtFilter, TAN MAN)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

Salford Group Inc
 364018 McBeth Rd
 Salford, ON
 CA N0J 1W0
 Contact: Chris Poppe
 chris.poppe@salfordgroup.com
 T: (519)485-3977
 F:

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	VLITE	---
Yellow Metal	scalar	Visual*	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	---
Silt	scalar	Visual*	NONE	VLITE	---
Debris	scalar	Visual*	NONE	▲ LTMOD	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---
Free Water	scalar	Visual*		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	58.4	54.1	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image
PrtFilter				no image	no image

GRAPHS

