


# PROBLEM SUMMARY

Sample Rating Trend



**WEAR PARTICLES**

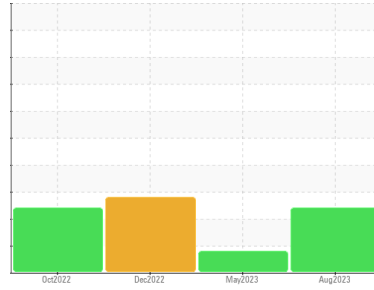

Machine Id  
**TIMM 2 B BARREL**  
 Component  
**Gearbox**  
 Fluid  
**SHELL OMALA 68 (--- GAL)**

## COMPONENT CONDITION SUMMARY

No relevant graphs to display

## RECOMMENDATION

The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition. No other corrective action is recommended at this time. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

## PROBLEMATIC TEST RESULTS

Sample Status	Scale	ASTM	ABNORMAL	ABNORMAL	ABNORMAL
Ferrous Rubbing	Scale 0-10	ASTM D7684*	▲ 7	■ 4	▲ 8
Ferrous Rolling	Scale 0-10	ASTM D7684*	▲ 4	■ 2	▲ 4

**Customer Id:** TOYCAM  
**Sample No.:** CB0031436  
**Lab Number:** 02579211  
**Test Package:** IND 3



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Kevin Marson +1 (289)291-4644 x4644  
[Kevin.Marson@wearcheck.com](mailto:Kevin.Marson@wearcheck.com)

To change component or sample information:  
 Gloria Gonzalez +1 (289)291-4643 x4643  
[gloria.gonzalez@wearcheck.com](mailto:gloria.gonzalez@wearcheck.com)

**RECOMMENDED ACTIONS**

Action	Status	Date	Done By	Description
Resample	---	---	?	We recommend an early resample to monitor this condition.
Information Required	---	---	?	NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

**HISTORICAL DIAGNOSIS**

**13 May 2023 Diag: Kevin Marson**

**WEAR**



The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Iron ppm levels are abnormal. The low ferrous density (PQ) index indicates the wear metal levels are due to corrosion. The direct-reading & analytical ferrographic results are normal indicating no abnormal wear in the system. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The oil is no longer serviceable as a result of the abnormal and/or severe wear.



**28 Dec 2022 Diag: Kevin Marson**

**WEAR PARTICLES**



The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition. No other corrective action is recommended at this time. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Wear particle analysis indicates that the ferrous rolling and ferrous rubbing particles are marginal. All other component wear rates are normal. There is no indication of any contamination in the oil. Viscosity of sample indicates oil is within ISO 68 range, advise investigate. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



**09 Oct 2022 Diag: Kevin Marson**

**WEAR PARTICLES**




No corrective action is recommended at this time. We recommend an early resample to monitor this condition. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Wear particle analysis indicates that the ferrous rolling and ferrous rubbing particles are marginal. All other component wear rates are normal. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



# OIL ANALYSIS REPORT

Sample Rating Trend

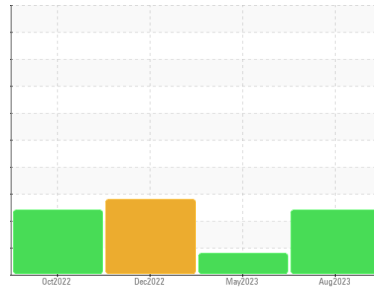

**WEAR PARTICLES**



Machine Id  
**TIMM 2 B BARREL**

Component  
**Gearbox**

Fluid  
**SHELL OMALA 68 (--- GAL)**

## DIAGNOSIS

### ▲ Recommendation

The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition. No other corrective action is recommended at this time. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

### ▲ Wear

Wear particle analysis indicates that the ferrous rubbing particles are abnormal. Wear particle analysis indicates that the ferrous rolling particles are marginal.

### Contaminants

There is no indication of any contamination in the oil.

### Oil Condition

The AN level is acceptable for this fluid. The oil is no longer serviceable as a result of the abnormal and/or severe wear.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>CB0031436</b>	CB0031109	CB0031217
Sample Date	Client Info		<b>04 Aug 2023</b>	13 May 2023	28 Dec 2022
Machine Age	hrs	Client Info	<b>0</b>	0	0
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>ABNORMAL</b>	ABNORMAL	ABNORMAL

## WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184*		<b>18</b>	25	6
Iron	ppm	ASTM D5185(m) >200	<b>180</b>	▲ 258	132
Chromium	ppm	ASTM D5185(m) >15	<b>4</b>	4	2
Nickel	ppm	ASTM D5185(m) >15	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m) >25	<b>&lt;1</b>	<1	0
Lead	ppm	ASTM D5185(m) >100	<b>0</b>	0	<1
Copper	ppm	ASTM D5185(m) >200	<b>&lt;1</b>	<1	2
Tin	ppm	ASTM D5185(m) >25	<b>0</b>	0	0
Antimony	ppm	ASTM D5185(m) >5	<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	<b>&lt;1</b>	2	1
Barium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	<b>&lt;1</b>	<1	0
Manganese	ppm	ASTM D5185(m)	<b>1</b>	2	2
Magnesium	ppm	ASTM D5185(m)	<b>&lt;1</b>	<1	<1
Calcium	ppm	ASTM D5185(m)	<b>9</b>	0	0
Phosphorus	ppm	ASTM D5185(m)	<b>325</b>	328	299
Zinc	ppm	ASTM D5185(m)	<b>14</b>	4	6
Sulfur	ppm	ASTM D5185(m)	<b>7827</b>	7828	7442
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	<1	<1




## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >50	<b>2</b>	2	2
Sodium	ppm	ASTM D5185(m)	<b>&lt;1</b>	1	<1
Potassium	ppm	ASTM D5185(m) >20	<b>0</b>	<1	0

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	<b>0.42</b>	0.42	0.32


# OIL ANALYSIS REPORT

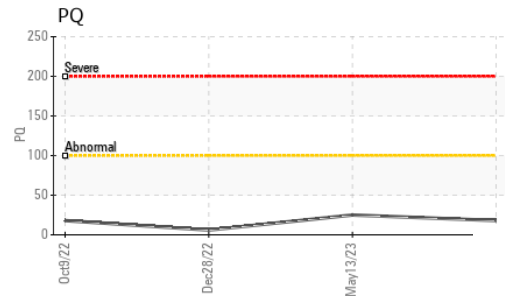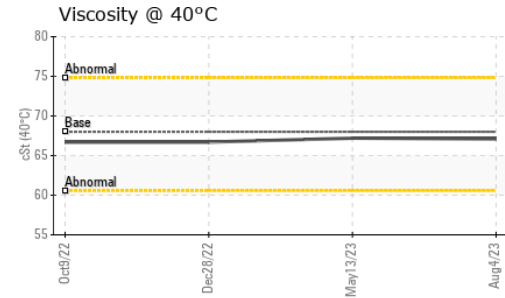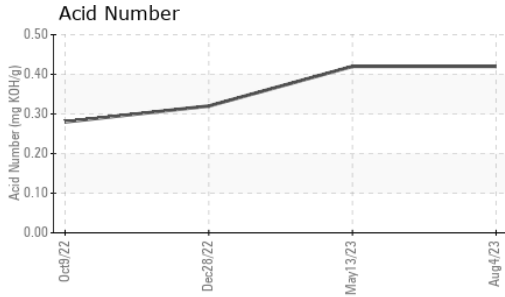






PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	VLITE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	68.0	67.1	67.2 ▲ 66.7

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

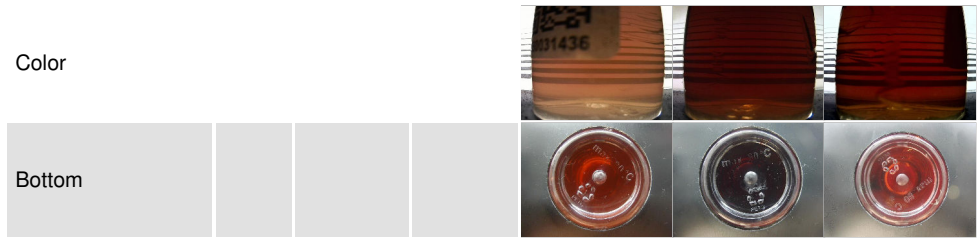

## GRAPHS

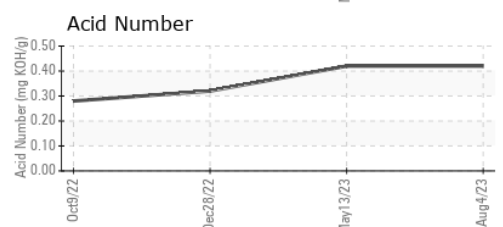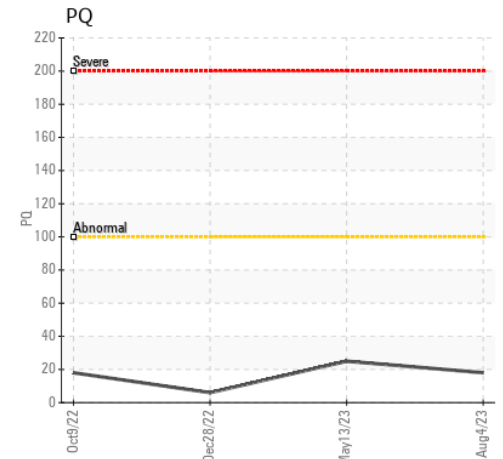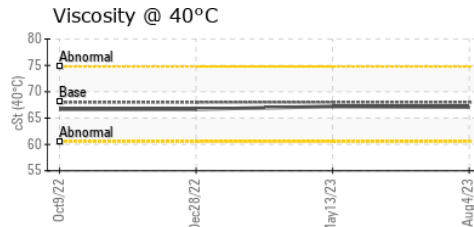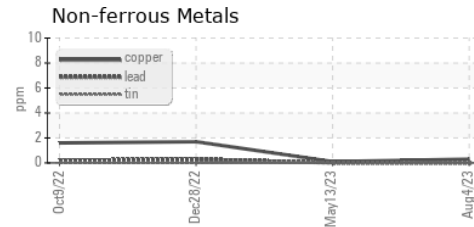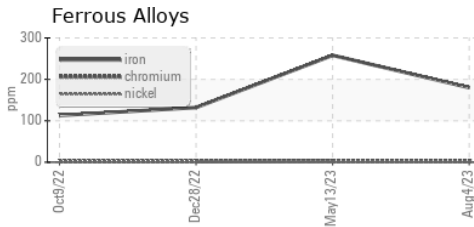




**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : CB0031436 **Received** : 29 Aug 2023  
**Lab Number** : 02579211 **Diagnosed** : 07 Sep 2023  
**Unique Number** : 5632271 **Diagnostician** : Kevin Marson  
**Test Package** : IND 3

**TOYOTA MOTOR MANUFACT.**  
 1055 FOUNTAIN STREET N.  
 CAMBRIDGE, ON  
 CA N3H 5K2  
 Contact: mike clappison  
 mike.clappison@toyota.com  
 T: (519)212-5023  
 F: (519)653-9638

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

# FERROGRAPHY REPORT

Machine Id  
**TIMM 2 B BARREL**  
Component  
**Gearbox**  
Fluid  
**SHELL OMALA 68 (--- GAL)**

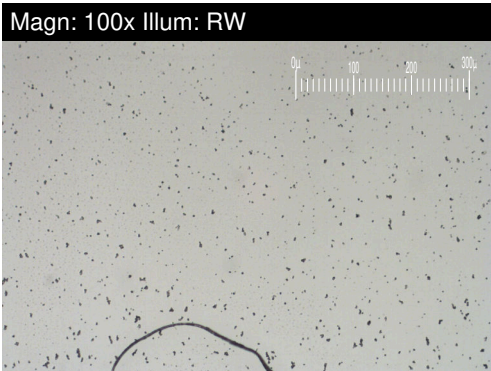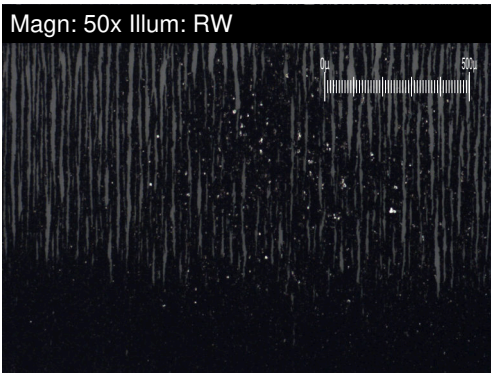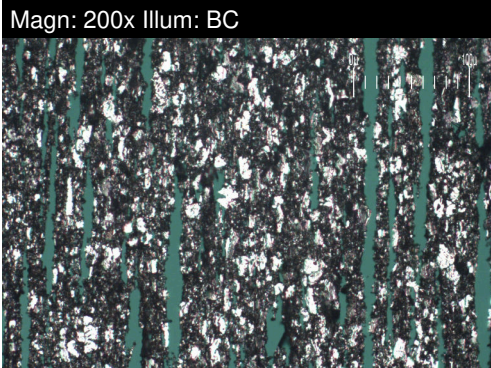


DR-FERROGRAPHY		method	limit/base	current	history1	history2
Large Particles		DR-Ferr*		<b>4.4</b>	35.8	135.3
Small Particles		DR-Ferr*		<b>1.7</b>	7.5	64.4
Total Particles		DR-Ferr*	>---	<b>6.1</b>	43.3	199.7
Large Particles Percentage	%	DR-Ferr*		<b>44.3</b>	65.4	35.5
Severity Index		DR-Ferr*		<b>12</b>	1013	9593

FERROGRAPHY		method	limit/base	current	history1	history2
Ferrous Rubbing	Scale 0-10	ASTM D7684*		<span style="color: orange;">▲</span> <span style="background-color: orange; width: 20px; height: 10px; display: inline-block;"></span> <b>7</b>	<span style="background-color: green; width: 20px; height: 10px; display: inline-block;"></span> 4	<span style="color: orange;">▲</span> <span style="background-color: orange; width: 20px; height: 10px; display: inline-block;"></span> 8
Ferrous Sliding	Scale 0-10	ASTM D7684*				
Ferrous Cutting	Scale 0-10	ASTM D7684*				
Ferrous Rolling	Scale 0-10	ASTM D7684*		<span style="color: orange;">▲</span> <span style="background-color: orange; width: 20px; height: 10px; display: inline-block;"></span> <b>4</b>	<span style="background-color: green; width: 20px; height: 10px; display: inline-block;"></span> 2	<span style="color: orange;">▲</span> <span style="background-color: orange; width: 20px; height: 10px; display: inline-block;"></span> 4
Ferrous Break-in	Scale 0-10	ASTM D7684*				
Ferrous Spheres	Scale 0-10	ASTM D7684*				
Ferrous Black Oxides	Scale 0-10	ASTM D7684*				
Ferrous Red Oxides	Scale 0-10	ASTM D7684*				
Ferrous Corrosive	Scale 0-10	ASTM D7684*		<span style="background-color: green; width: 20px; height: 10px; display: inline-block;"></span> <b>1</b>	<span style="background-color: green; width: 20px; height: 10px; display: inline-block;"></span> 2	
Ferrous Other	Scale 0-10	ASTM D7684*				
Nonferrous Rubbing	Scale 0-10	ASTM D7684*				
Nonferrous Sliding	Scale 0-10	ASTM D7684*				
Nonferrous Cutting	Scale 0-10	ASTM D7684*				
Nonferrous Rolling	Scale 0-10	ASTM D7684*				
Nonferrous Other	Scale 0-10	ASTM D7684*				
Carbonaceous Material	Scale 0-10	ASTM D7684*				
Lubricant Degradation	Scale 0-10	ASTM D7684*				
Sand/Dirt	Scale 0-10	ASTM D7684*		<span style="background-color: green; width: 20px; height: 10px; display: inline-block;"></span> <b>1</b>	<span style="background-color: green; width: 20px; height: 10px; display: inline-block;"></span> 1	<span style="background-color: green; width: 20px; height: 10px; display: inline-block;"></span> 1
Fibres	Scale 0-10	ASTM D7684*				
Spheres	Scale 0-10	ASTM D7684*				
Other	Scale 0-10	ASTM D7684*		<span style="background-color: green; width: 20px; height: 10px; display: inline-block;"></span> <b>2</b>	<span style="background-color: green; width: 20px; height: 10px; display: inline-block;"></span> 2	<span style="background-color: green; width: 20px; height: 10px; display: inline-block;"></span> 1

## WEAR

Wear particle analysis indicates that the ferrous rubbing particles are abnormal. Wear particle analysis indicates that the ferrous rolling particles are marginal.

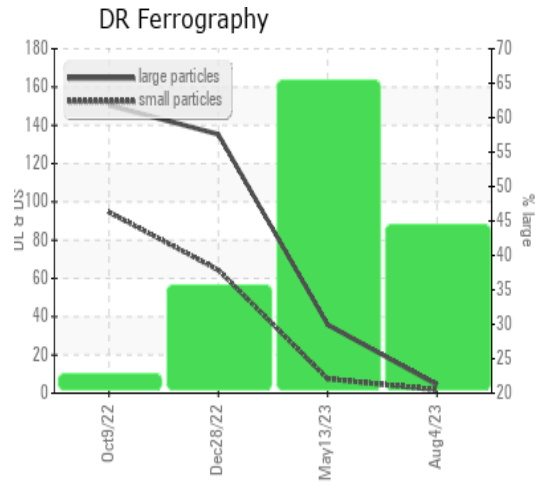

*This page left intentionally blank*