




OIL ANALYSIS REPORT

Sample Rating Trend

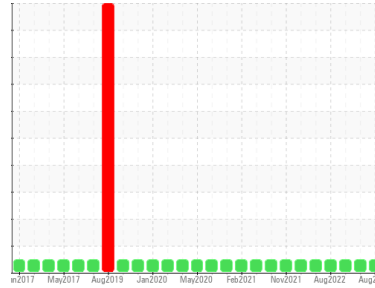

NORMAL



Machine Id

NOVA 1628

Component

Natural Gas Engine

Fluid

VALVOLINE PREMIUM BLUE 9200 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0849946	WC0767273	WC0722286
Sample Date	Client Info		23 Aug 2023	20 Feb 2023	24 Nov 2022
Machine Age	kms	Client Info	0	415210	0
Oil Age	kms	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			NORMAL	NORMAL	NORMAL

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>50	13	17	12
Chromium	ppm	ASTM D5185(m)	>4	2	2	2
Nickel	ppm	ASTM D5185(m)	>2	<1	1	<1
Titanium	ppm	ASTM D5185(m)		<1	3	1
Silver	ppm	ASTM D5185(m)	>3	<1	<1	<1
Aluminum	ppm	ASTM D5185(m)	>9	2	3	2
Lead	ppm	ASTM D5185(m)	>30	1	2	1
Copper	ppm	ASTM D5185(m)	>35	17	31	17
Tin	ppm	ASTM D5185(m)	>4	0	<1	<1
Antimony	ppm	ASTM D5185(m)		0	<1	1
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)		4	6	8
Barium	ppm	ASTM D5185(m)		0	0	0
Molybdenum	ppm	ASTM D5185(m)		54	52	52
Manganese	ppm	ASTM D5185(m)		<1	<1	<1
Magnesium	ppm	ASTM D5185(m)		835	811	799
Calcium	ppm	ASTM D5185(m)		1236	1358	1298
Phosphorus	ppm	ASTM D5185(m)		706	765	687
Zinc	ppm	ASTM D5185(m)		883	873	861
Sulfur	ppm	ASTM D5185(m)		1858	1888	1901
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>+100	20	6	6
Sodium	ppm	ASTM D5185(m)		5	6	4
Potassium	ppm	ASTM D5185(m)	>20	<1	0	0

INFRA-RED



	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*		0	0	0
Nitration	Abs/cm	ASTM D7624*	>20	13.9	7.1	13.4
Sulfation	Abs/.1mm	ASTM D7415*	>30	26.6	18.0	24.7

FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	ASTM D7414*	>25	24.0	11.6	22.7











OIL ANALYSIS REPORT

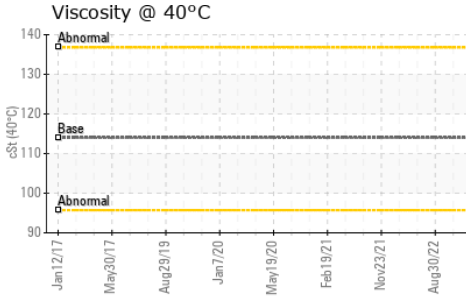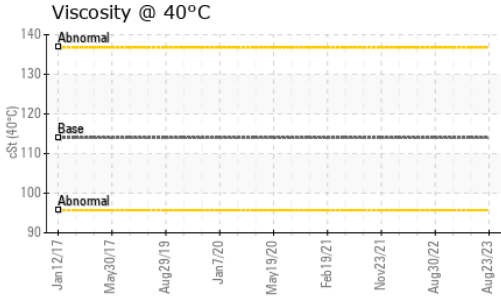

VISUAL	method	limit/base	current	history1	history2
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG
Free Water	scalar	Visual*	NEG	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	114	109	---
Visc @ 100°C	cSt	ASTM D7279(m)	14.8	14.0	13.5
Viscosity Index (VI)	Scale	ASTM D2270*	133	129	---

GRAPHS

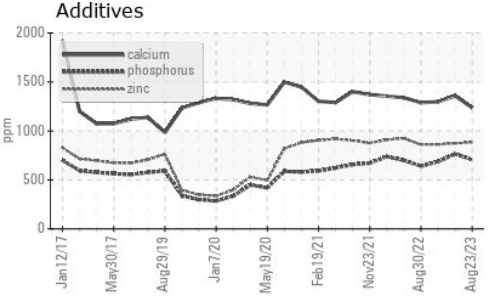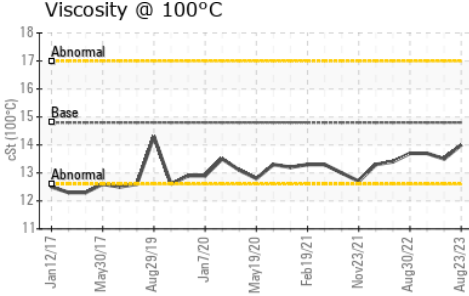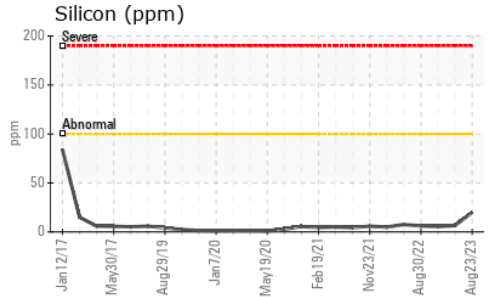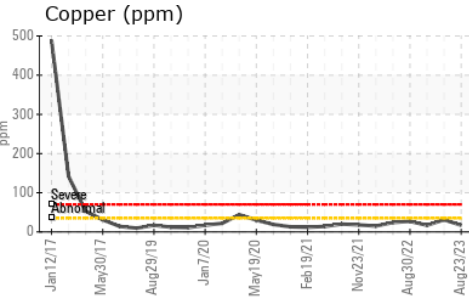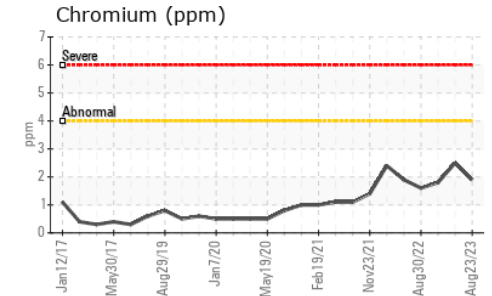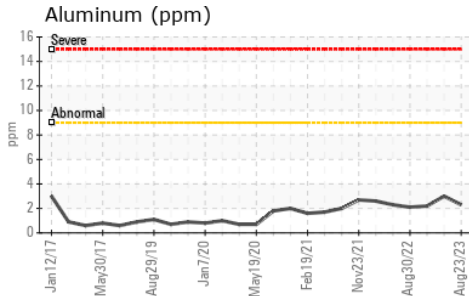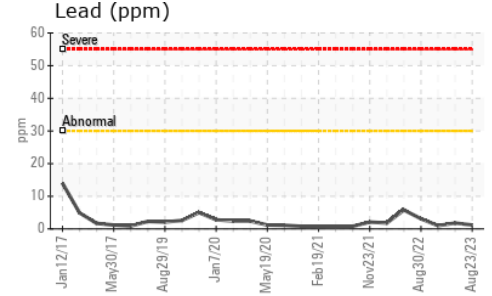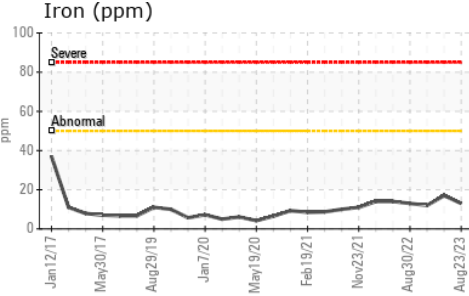

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0849946 **Received** : 30 Aug 2023
Lab Number : 02579292 **Diagnosed** : 30 Aug 2023
Unique Number : 5632352 **Diagnostician** : Wes Davis
Test Package : MOB 1 (Additional Tests: KV40, VI, Visual)

CITY OF HAMILTON
 2200 UPPER JAMES., MOUNTAIN TRANSIT STOREROOM
 MOUNT HOPE, ON
 CA L0R 1W0
 Contact: Jeff Parr
 jeff.parr@hamilton.ca
 T: (905)546-2424
 F: (905)679-4502

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.