




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

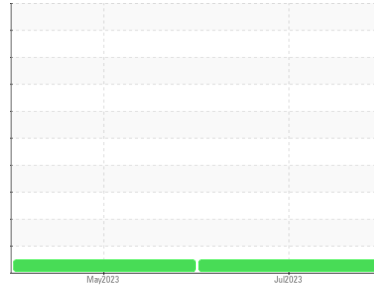

Area
(C-GFCU)
 Machine Id
[C-GFCU] CESSNA L-21806-27A
 Component
Piston Aircraft Engine
 Fluid
SHELL AEROSHELL W 15W50 MGR (8 LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0834779	WC0740390	---
Sample Date	Client Info		24 Jul 2023	18 May 2023	---
TSN	hrs	Client Info	2993	2993	---
TSO	hrs	Client Info	880	0	---
Oil Age	hrs	Client Info	50	50	---
Oil Changed		Client Info	Changed	Changed	---
Sample Status			NORMAL	NORMAL	---

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>4.0	<1.0	<1.0	---
Glycol	WC Method		NEG	NEG	---

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>90	25	26	---
Chromium	ppm	ASTM D5185(m)	>20	6	8	---
Nickel	ppm	ASTM D5185(m)	>15	3	3	---
Titanium	ppm	ASTM D5185(m)		0	0	---
Silver	ppm	ASTM D5185(m)	>5	0	0	---
Aluminum	ppm	ASTM D5185(m)	>25	9	14	---
Lead	ppm	ASTM D5185(m)	>20000	4083	2000	---
Copper	ppm	ASTM D5185(m)	>25	19	9	---
Tin	ppm	ASTM D5185(m)	>30	0	<1	---
Antimony	ppm	ASTM D5185(m)		0	0	---
Vanadium	ppm	ASTM D5185(m)		0	0	---
Beryllium	ppm	ASTM D5185(m)		0	0	---
Cadmium	ppm	ASTM D5185(m)		1	1	---

ADDITIVES


	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)		<1	<1	---
Barium	ppm	ASTM D5185(m)		0	0	---
Molybdenum	ppm	ASTM D5185(m)	5	0	0	---
Manganese	ppm	ASTM D5185(m)		0	0	---
Magnesium	ppm	ASTM D5185(m)	10	<1	<1	---
Calcium	ppm	ASTM D5185(m)	10	1	2	---
Phosphorus	ppm	ASTM D5185(m)	1280	1107	1238	---
Zinc	ppm	ASTM D5185(m)	10	10	6	---
Sulfur	ppm	ASTM D5185(m)	1800	2670	2306	---
Lithium	ppm	ASTM D5185(m)		<1	<1	---

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>15	3	5	---
Sodium	ppm	ASTM D5185(m)		<1	<1	---
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	---






OIL ANALYSIS REPORT

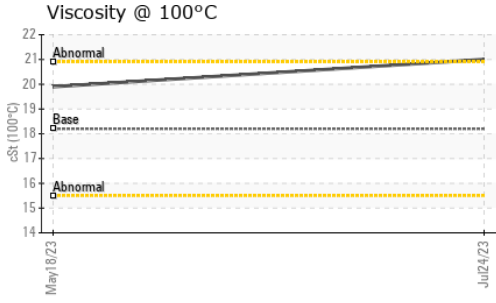

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	---
Silt	scalar	Visual*	NONE	LIGHT	---
Debris	scalar	Visual*	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---
Free Water	scalar	Visual*		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D7279(m)	18.2	21.0	19.9	---

GRAPHS

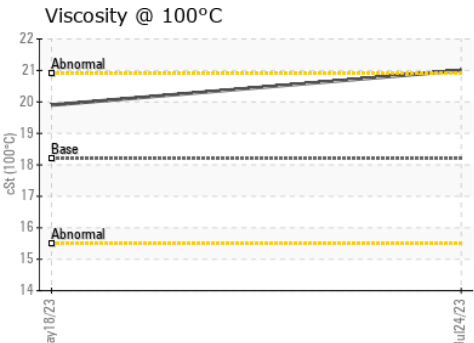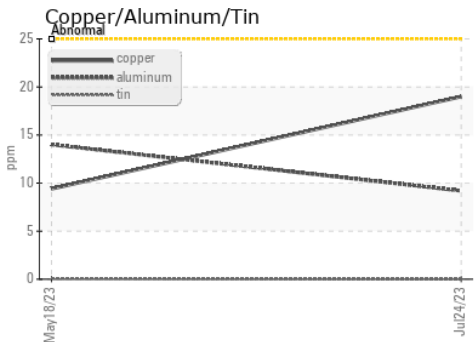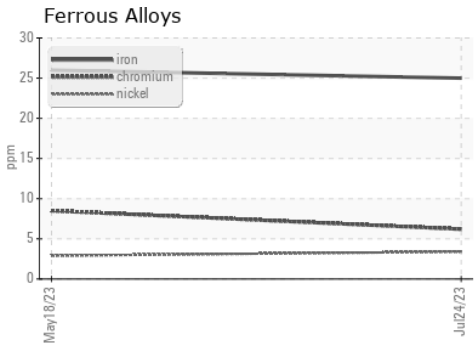

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0834779 **Received** : 30 Aug 2023
Lab Number : **02579326** **Diagnosed** : 30 Aug 2023
Unique Number : 5632386 **Diagnostician** : Kevin Marson
Test Package : AVI 1

AIR PARTNERS INC.
 2833 - 16TH AVENUE., HANGAR 9
 MARKHAM, ON
 CA L3R 0P8
 Contact: Joanne
 joanne.airpartners@gmail.com
 T:
 F: (905)513-8986

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.