




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

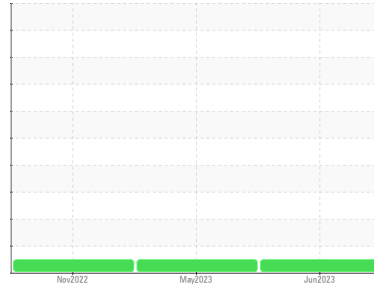

Area
(C-GNED)
 Machine Id
[C-GNED] CESSNA 172M L-41712-27A
 Component
Piston Aircraft Engine
 Fluid
SHELL AEROSHELL W 15W50 MGR (8 LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0740387	WC0768498	WC0740378
Sample Date	Client Info		29 Jun 2023	19 May 2023	26 Nov 2022
TSN	hrs	Client Info	0	3120	0
TSO	hrs	Client Info	0	0	0
Oil Age	hrs	Client Info	50	50	50
Oil Changed		Client Info	Changed	Changed	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>4.0	<1.0	<1.0	<1.0
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >90	19	18	22
Chromium	ppm	ASTM D5185(m) >20	2	1	3
Nickel	ppm	ASTM D5185(m) >15	1	1	2
Titanium	ppm	ASTM D5185(m)	0	0	0
Silver	ppm	ASTM D5185(m) >5	0	0	0
Aluminum	ppm	ASTM D5185(m) >25	5	6	7
Lead	ppm	ASTM D5185(m) >20000	3955	3691	3486
Copper	ppm	ASTM D5185(m) >25	20	17	16
Tin	ppm	ASTM D5185(m) >30	<1	<1	<1
Antimony	ppm	ASTM D5185(m)	0	0	0
Vanadium	ppm	ASTM D5185(m)	0	0	0
Beryllium	ppm	ASTM D5185(m)	0	0	0
Cadmium	ppm	ASTM D5185(m)	1	2	<1

ADDITIVES


	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	<1	<1	<1
Barium	ppm	ASTM D5185(m)	0	0	0
Molybdenum	ppm	ASTM D5185(m) 5	0	0	0
Manganese	ppm	ASTM D5185(m)	0	0	0
Magnesium	ppm	ASTM D5185(m) 10	<1	<1	0
Calcium	ppm	ASTM D5185(m) 10	2	1	0
Phosphorus	ppm	ASTM D5185(m) 1280	1201	1222	1330
Zinc	ppm	ASTM D5185(m) 10	9	8	5
Sulfur	ppm	ASTM D5185(m) 1800	1098	1103	1058
Lithium	ppm	ASTM D5185(m)	<1	<1	<1

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >15	6	7	3
Sodium	ppm	ASTM D5185(m)	<1	<1	<1
Potassium	ppm	ASTM D5185(m) >20	<1	<1	0






OIL ANALYSIS REPORT

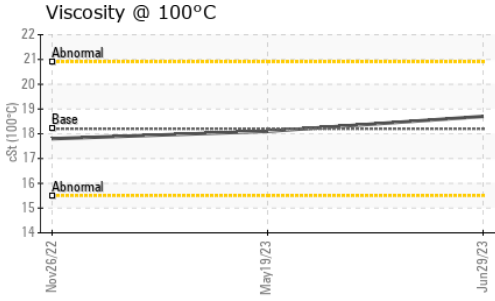

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	LIGHT	LIGHT
Debris	scalar	Visual*	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D7279(m)	18.2	18.7	18.1	17.8

GRAPHS

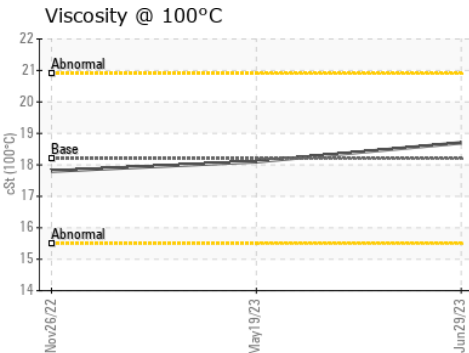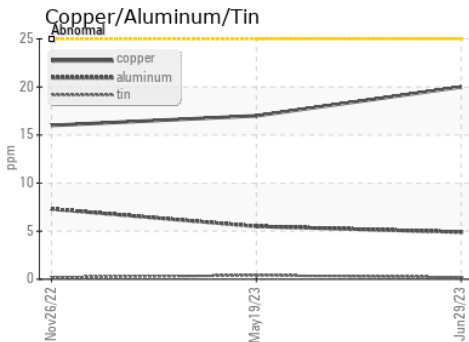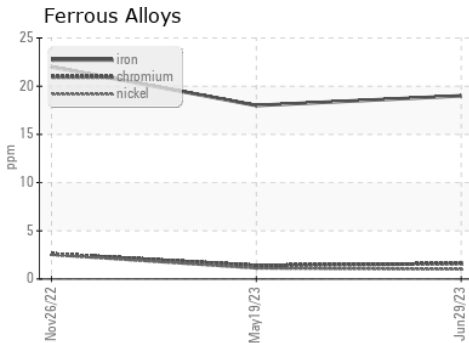

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0740387 **Received** : 30 Aug 2023
Lab Number : **02579337** **Diagnosed** : 30 Aug 2023
Unique Number : 5632397 **Diagnostician** : Kevin Marson
Test Package : AVI 1

AIR PARTNERS INC.
 2833 - 16TH AVENUE., HANGAR 9
 MARKHAM, ON
 CA L3R 0P8
 Contact: Joanne
 joanne.airpartners@gmail.com
 T:
 F: (905)513-8986

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.