

OIL ANALYSIS REPORT

Machine Id 904-M38-01A - #5 EAST PROD BOOM Component

Hydraulic System NOT GIVEN (--- GAL)

DIAGNOSIS

Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear


All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PP13893605		
Sample Date		Client Info		21 Aug 2023		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
WEAR METALS		method	limit/booo	ou www.out	biotomut	history 0
			limit/base	current	history1	history2
lron Chromium	ppm	ASTM D5185(m) ASTM D5185(m)		<1 0		
	ppm	(/	>10			
Nickel	ppm	ASTM D5185(m)	>10	<1		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)	10	0		
Aluminum	ppm	ASTM D5185(m)	>10	<1 -		
Lead	ppm	ASTM D5185(m)	>20	7		
Copper	ppm	ASTM D5185(m)	>20	<1		
Tin	ppm	ASTM D5185(m)	>10	0		
Antimony	ppm	ASTM D5185(m)		0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<1		
Barium	ppm	ASTM D5185(m)		0		
Molybdenum	ppm	ASTM D5185(m)		0		
Manganese	ppm	ASTM D5185(m)		0		
Magnesium	ppm	ASTM D5185(m)		<1		
Calcium	ppm	ASTM D5185(m)		113		
Phosphorus	ppm	ASTM D5185(m)		475		
Zinc	ppm	ASTM D5185(m)		5		
Sulfur	ppm	ASTM D5185(m)		1341		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>15	0		
Sodium	ppm	ASTM D5185(m)		<1		
Potassium	ppm	ASTM D5185(m)	>20	0		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	1344		
Particles >6µm		ASTM D7647	>1300	294		
Particles >14µm		ASTM D7647	>160	19		
Particles >21µm		ASTM D7647	>40	5		
Particles >38µm		ASTM D7647	>10	0		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	18/15/11		
FLUID DEGRADA		method	limit/base	current	history1	history2

mg KOH/g ASTM D974* Acid Number (AN)

0.10

Report Id: EXXSTJ [WCAMIS] 02579357 (Generated: 08/31/2023 09:37:17) Rev: 1

Contact/Location: Liam Maher - EXXSTJ




45


0° 40 చ్చ 35

30

25 20 Aug21

OIL ANALYSIS REPORT

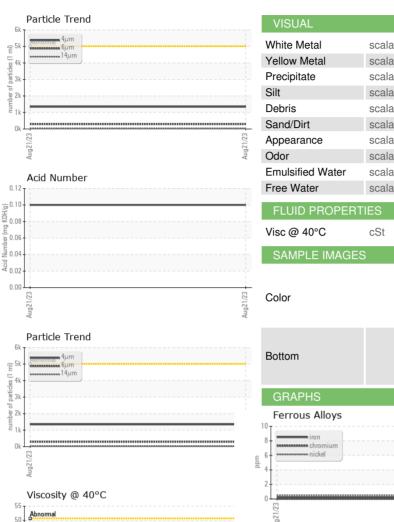

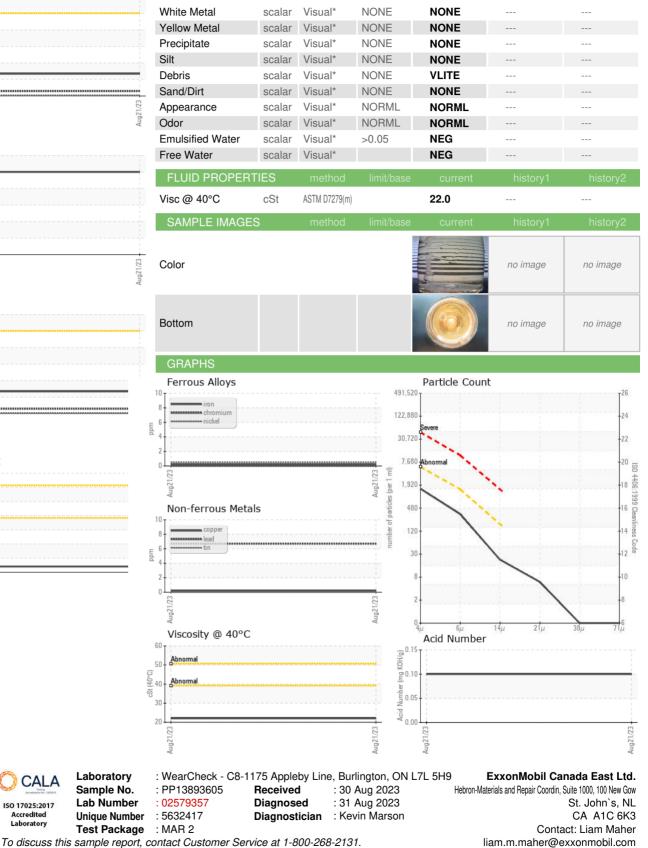

5

Laboratory

Sample No.

Lab Number

Unique Number

Test Package

CALA

Report Id: EXXSTJ [WCAMIS] 02579357 (Generated: 08/31/2023 09:37:17) Rev: 1

ISO 17025:2017 Accredited Laboratory

Contact/Location: Liam Maher - EXXSTJ

Page 2 of 2

F:

T: (709)273-3729