

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

Machine Id

904-M38-02A - #2 WEST PROD BOOM

Component

Hydraulic System

NOT GIVEN (--- GAL)

DIAGNOSIS

Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.


Fluid Condition

Viscosity of sample indicates oil is within ISO 22 range, advise investigate. The condition of the oil is acceptable for the time in service.

				Aug2023		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PP13895688		
Sample Date		Client Info		21 Aug 2023		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed	0	Client Info		N/A		
Sample Status				NORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>20	<1		
Chromium	ppm	ASTM D5185(m)	>10	0		
Nickel	ppm	ASTM D5185(m)	>10	<1		
Titanium	ppm	ASTM D5185(m)	7.0	0		
Silver	ppm	ASTM D5185(m)		<1		
Aluminum	ppm	ASTM D5185(m)	>10	<1		
Lead		ASTM D5185(m)	>20	6		
	ppm	ASTM D5185(m)	>20	<1		
Copper Tin	ppm	ASTM D5185(m)	>20	0		
	ppm	ASTM D5185(m)	>10	0		
Antimony	ppm	(/		-		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<1		
Barium	ppm	ASTM D5185(m)		0		
Molybdenum	ppm	ASTM D5185(m)		0		
Manganese	ppm	ASTM D5185(m)		0		
Magnesium	ppm	ASTM D5185(m)		<1		
Calcium	ppm	ASTM D5185(m)		114		
Phosphorus	ppm	ASTM D5185(m)		482		
Zinc	ppm	ASTM D5185(m)		5		
Sulfur	ppm	ASTM D5185(m)		1361		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINANTS	3	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>15	<1		
Sodium	ppm	ASTM D5185(m)		1		
Potassium	ppm	ASTM D5185(m)	>20	<1		
FLUID CLEANLIN	NESS _	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	934		
Particles >6µm		ASTM D7647	>1300	447		
Particles >14µm		ASTM D7647	>160	118		
Particles >21µm		ASTM D7647	>40	53		
Particles >38µm		ASTM D7647	>10	6		
Particles >71µm		ASTM D7647		1		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	17/16/14		
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2
	ma KO∐/a	ASTM DO74*		0.00		



OIL ANALYSIS REPORT

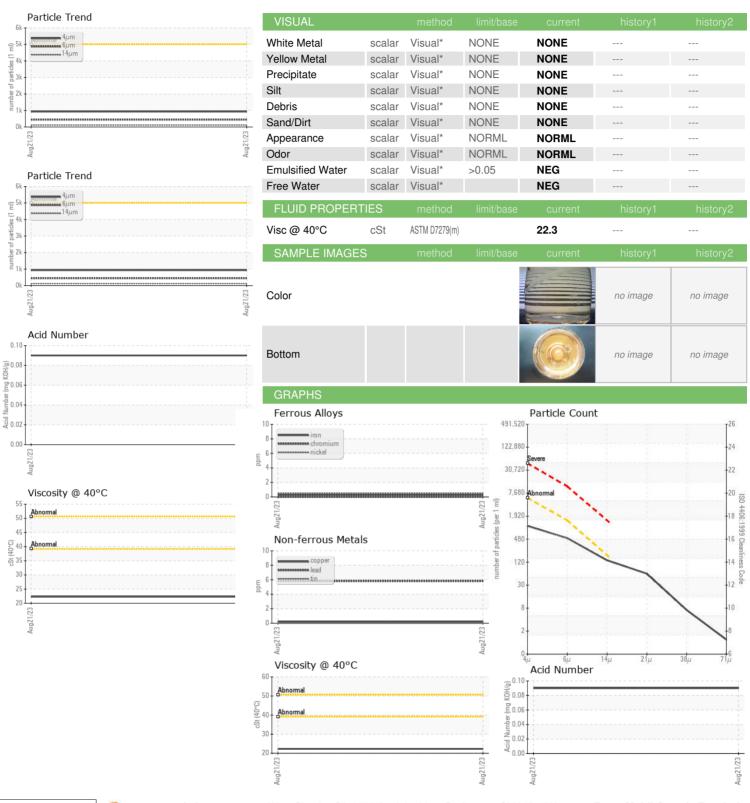



CALA ISO 17025:2017 Accredited Laboratory

Laboratory Sample No. Lab Number **Unique Number**

: PP13895688 : 02579359 : 5632419 Test Package : MAR 2

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 Received Diagnosed

: 30 Aug 2023 : 01 Sep 2023 : Kevin Marson Diagnostician

ExxonMobil Canada East Ltd. Hebron-Materials and Repair Coordin, Suite 1000, 100 New Gow St. John's, NL

Contact/Location: Liam Maher - EXXSTJ

CA A1C 6K3 Contact: Liam Maher liam.m.maher@exxonmobil.com

To discuss this sample report, contact Customer Service at 1-800-268-2131. Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

T: (709)273-3729